
American Standard

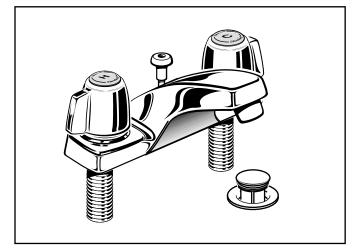


2275.200 Shown.

Colony TWO-HANDLE CENTERSET LAVATORY FAUCET


MODEL NUMBER:

- **2275.200 Centerset Lavatory Faucet** Lever Handles. 50/50 Pop-up drain.
- 2275.205 Centerset Lavatory Faucet Lever Handles. Less drain. With pop-up hole, plug button and rod.
- **2275.209 Centerset Lavatory Faucet** Lever Handles. Metal Pop-up drain.



GENERAL DESCRIPTION:

Centerset lavatory faucet on 4" centers. 1/4 turn washerless ceramic disc valve cartridges - reversible for use on either "hot" or "cold" side. Durable cast brass waterways with onehalf inch male inlet shanks. Metal body. Notched underbody to receive chain and stopper. 2.2 gpm/8.3L/min. maximum flow rate.



PRODUCT FEATURES:

Cast Brass Waterways with "City Shanks": Strong and durable. Integral tabs on casting provide a wobble-free installation.

Ceramic Disc Valve Cartridge: Assures a lifetime of smooth handle operation and drip-free performance. Reversible for use on either "hot" or "cold" side.

Low Lead: Meets NSF Standard 61/Section 9 & Prop 65 lead requirements.

Longer Spout: Provides extended reach into lavatory.

Simple Installation: Fast and easy one person installation. Faucet drops in from top. Quick spin nuts secure faucet in place.

Lifetime Warranty

SUGGESTED SPECIFICATION:

Two-handle 4" centerset lavatory faucet shall feature a cast brass waterway. Shall also feature 1/4 turn washerless ceramic disc valve cartridges that are reversible for use on either "hot" or "cold" side. Fitting shall be American Standard Model # 2275.20__.___.


American Standard

Colony TWO-HANDLE CENTERSET LAVATORY FAUCET

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1M CSA B125 NSF 61/Section 9



		Finish
Product		Polished Chrome
Number	Description	002
2275.200	Centerset lavatory. Lever Handles. 50/50 Pop-up drain.	
2275.205	Centerset lavatory. Lever Handles. Less drain. With pop-up hole and rod.	
2275.209	Centerset lavatory. Lever Handles. Metal Pop-up drain.	

Beets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.