



# RM 1000M Rack Mounting Kit • User Guide

**IMPORTANT:**  
Refer to [www.extron.com](http://www.extron.com) for the complete TLP 1000 Series user guide before connecting the product to the power source.

## Overview

This guide provides instructions for an experienced installer to mount and install the Extron TLP 1000MV TouchLink™ panel in a standard 19 inch equipment rack, with 5U of vertical space. For complete instructions about installing and calibrating the TouchLink panel, see the *TLP 1000MV and TLP 1000TV User Guide*, which is available on the Extron website ([www.extron.com](http://www.extron.com)).

## Preparing and Installing the RM 1000M Mounting Kit

To mount the TLP 1000MV in any standard 19 inch equipment rack, follow these instructions:

1. If necessary, disconnect any cables that are attached to the TouchLink panel.
2. Run cables to the rack. Provide some slack in the cable for installing the TLP 1000MV
3. Secure the RM rack mount plate to the rack using the rack mount screws provided by the manufacturer of the rack.

## Mounting the TLP 1000MV


1. Remove the faceplate from the TLP 1000MV and ensure that all the locking arms are flush with the unit.
2. Push the TouchLink panel through the opening in the RM 1000M.
3. You may secure the TLP 1000MV to the RM 1000M using the locking arms ③a or mounting screws ③b.

③a Tighten the five screws for the locking arms (three on the top and two on the bottom of the TLP 1000MV). As the screws tighten, the locking arms rotate and clamp against the back of the RM 1000M, holding the TouchLink panel in place. Do not overtighten the screws.

OR

③b Use four mounting screws (#6-32 x 0.375") to secure the TouchLink panel to the nut inserts in the RM 1000M. Do not overtighten the screws.

4. Connect the cables to the back of the TLP 1000MV. If necessary, carry out an initial calibration of the TouchLink panel, and replace the faceplate. For complete instructions about cabling and calibration, see the *TLP 1000MV and TLP 1000TV User Guide*.

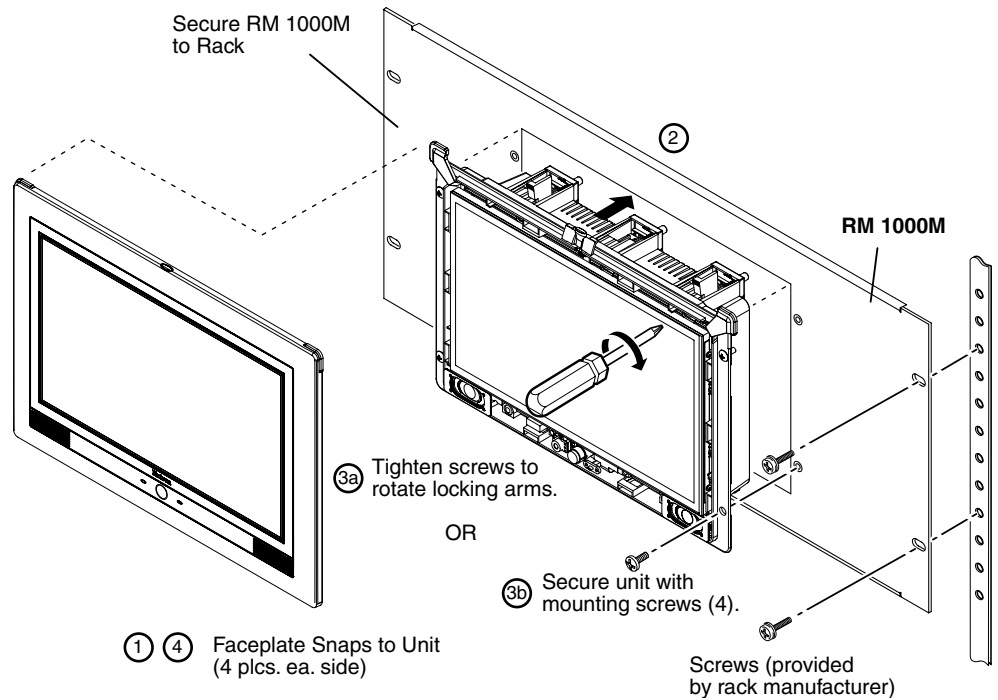

Extron <b>USA - West</b> Headquarters <b>+800.633.9876</b> Inside USA/Canada Only <b>+1.714.491.1500</b> <b>+1.714.491.1517</b> FAX	Extron <b>USA - East</b> <b>+800.633.9876</b> Inside USA/Canada Only <b>+1.919.863.1794</b> <b>+1.919.863.1797</b> FAX	Extron <b>Europe</b> <b>+800.3987.6673</b> Inside Europe Only <b>+31.33.453.4040</b> <b>+31.33.453.4050</b> FAX	Extron <b>Asia</b> <b>+800.7339.8766</b> Inside Asia Only <b>+65.6383.4400</b> <b>+65.6383.4664</b> FAX	Extron <b>Japan</b> <b>+81.3.3511.7655</b> <b>+81.3.3511.7656</b> FAX	Extron <b>China</b> <b>+400.883.1568</b> Inside China Only <b>+86.21.3760.1568</b> <b>+86.21.3760.1566</b> FAX	Extron <b>Middle East</b> <b>+971.4.2991800</b> <b>+971.4.2991880</b> FAX
--	--	---	---	---	--	---