

Item
Model
ProjectName



600017

Freestanding-inert gas

The new range of appliances, developed for the vacuum packing of cooked and raw foods, can provide the highest quality and hygiene, in line with every professional kitchen that requires the best conservation standards. The range is designed to satisfy the requirements of users at all levels from small/medium sized restaurants to canteens, catering concerns (100 to 400 covers a day), speciality food manufacturers and large butcher's. The 2 models, detailed on this sheet, are the ones prearranged for inert gas.

FEATURES

- Free-standing appliance.
- Digital control panel that allows the programming and storing of operating programmes guaranteeing optimised vacuum pressure and heat seal times for any type of product.
- Microprocessor control guarantees that the appropriate percentage of negative pressure is achieved by automatically calculating vacuum pump

operating and shut-off times and heat seal times from the quantity of air to be removed.

- Maximum reliability thanks to a warning light that indicates any malfunctioning in the vacuum packing process and stopping it before the products are heat sealed, thus allowing them to be reused.

Vacuum Packers



DITO**Electrolux**

- Pressure chamber with rounded corners to guarantee high levels of hygiene and ease of cleaning.
- Constructed in 304 AISI stainless steel with a domed, transparent Plexiglas lid suitable for use with food products.
- All models can be equipped with a coupler to allow the vacuum packing process to take place in other appropriate

containers or appliances and not in the chamber of the machine itself (to be ordered as a special product).

- All models comply with the standards required by the main international approval bodies and are CE marked.

Specifications

MODEL	CSV26C 600017	CSV41C 600018
Pump - m3/h	20	40
External dimensions - mm		
width	550	770
depth	600	690
height	1000	1025
Chamber dimensions - mm		
width	466	663
depth	456	518
height	218	241
Electrical power - kW	1.1	1.5
Net weight - kg.	101	185
Sealing bar length - mm	450	500

Optional accessories

CODE	DESCRIPTION	CSV26C 600017	CSV41C 600018
650008	ADAPTER FOR EXT.VACUUM PACK.-6/10/20M3/H	✓	
650010	INCL.FILLING TABLE-LIQUID PACKING-20M3/H	✓	
650011	INCL.FILLING TABLE-LIQUID PACKING-40M3/H		✓




DITO


Electrolux

Installation drawings

600017

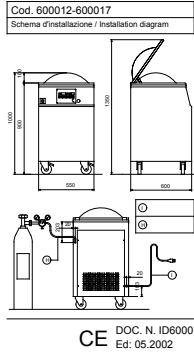

600018

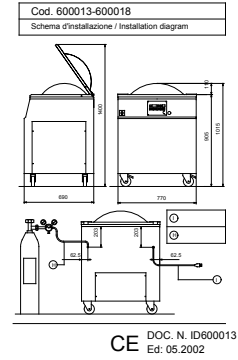

MODEL

I - Electrical connection

**CSV26C
600017**

230 V, 1N, 50/60

**CSV41C
600018**

380 V, 3, 50/60

The manufacturer reserves the right to modify and make improvements to the products without giving prior warning. Dimensions, illustrations, technical data, weights, etc. are given as an indication only.



www.dito-electrolux.com

Vacuum Packers

ANAC020

