



# *CV-M300*

## *Industrial Monochrome CCD Camera*



- *2/3" monochrome CCD camera*
- *CCIR: 752 (h) x 582 (v) pixels. EIA: 768 (h) x 494 (v) pixels*
- *Increased sensitivity and improved dynamic range*
- *Reduced smear level*
- *High S/N ratio >58 dB*
- *Interlaced or non-interlaced scanning*
- *Field or frame accumulation mode*
- *Internal, external HD/VD or random synchronization*
- *Random trigger with edge pre-select, start/stop and pulse width control shutter*
- *Long time exposure with external VD pulses*
- *HD/VD input or output TTL or 75 Ohm*
- *Exposure enable (EEN) and write enable (WEN) output*
- *Pixel clock output for frame grabber friendly interface*
- *Rugged and compact construction*


*The leading manufacturer of high performance camera solutions*

# Specifications for CV-M300

Specifications	CV-M300C	CV-M300E
Scanning system	625 lines 25 frames/sec.	525 lines 30 frames/sec.
CCD sensor	Monochrome 2/3" IT CCD	
Sensing area	8.8 mm (h) x 6.6 mm (v)	
Effective pixels	752 (h) x 582 (v)	768 (h) x 494 (v)
Pixels in video output	737 (h) x 575 (v)	758 (h) x 486 (v)
Cell size	11.6 (h) x 11.2 (v) $\mu\text{m}$	
Resolution (horizontal)	560 TV lines	570 TV lines
Sensitivity on sensor	0.05 Lux, Max gain, 50% video	
S/N ratio	>59 dB (AGC off, Gamma 1)	
Video output	Composite VS signal 1.0 Vpp, 75 Ohm	
Gamma	0.45 - 1.0	
Gain	Manual - Automatic Potentiometer - AGC	
Gain range	0 to +18 dB	
Scanning	2:1 interlace - non-interlace	
Accumulation	Field - frame	
Synchronization	Int. X-tal. or Ext. HD/VD or random trigger	
HD sync. input/output	4 Vpp, 75 Ohm*	
VD sync. input/output	4 Vpp, 75 Ohm*	
Trigger input	4 Vpp, 75 Ohm*	
WEN output (write enable)	4 Vpp, 75 Ohm*	
EEN output (exposure enable)	4 Vpp, 75 Ohm*	
Pixel clock out (optional)	4 Vpp, 75 Ohm	
Trigger modes	Normal, Edge pre-select, Pulse width control and Start/stop	
Trigger input duration	>H to <1000H. (CCIR: 64 $\mu\text{sec.}$ to 1 msec., EIA: 63.5 $\mu\text{sec.}$ to 1 msec.)	
Internal and edge pre-select	1/50, 1/100, 1/250, 1/500, 1/1000, 1/2000, 1/4500, 1/10,000 sec.	
Pulse width control	1H to 251H	
Start/stop	1/77 to 1/10,000 sec.	
Long time exposure	1 field to $\infty$ Duration between ext. VD pulses	
Operating temperature	-5°C to +45°C	
Humidity	20 - 80% non-condensing	
Power	12V DC $\pm$ 10%. 3.6 W	
Lens mount	C-mount	
Dimensions	40 x 50 x 80 mm (HxWxD)	
Weight	230 g	

\* HD sync., VD sync./Trigger input or output by internal jumpers. Factory setting: HD/VD input. Inputs TTL or 75 Ohm terminated by internal jumpers. Factory setting: 75 Ohm terminated.


## Switch Setting

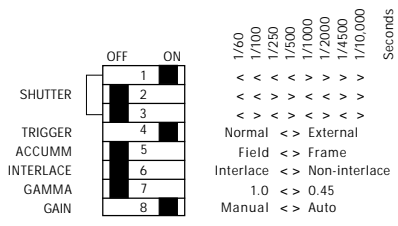


## Ordering Information

CV-M300C 2/3" Industrial Monochrome Camera. CCIR  
CV-M300E 2/3" Industrial Monochrome Camera. EIA

## Connection Description




- Hirose HR10A-10R-12P. Male.
- Pin 1 Ground
  - 2 +12V DC
  - 3 Ground
  - 4 Video output
  - 5 Ground
  - 6 HD in/(HD output)
  - 7 VD input/(VD/WEN output)
  - 8 Ground
  - 9 Pixel clock output (sine) optional\*\*
  - 10 Ground
  - 11 +12V DC
  - 12 Ground








- Hirose HR10A-7R-6P. Male.
- Pin 1 N.C.
  - 2 EEN output
  - 3 Ground
  - 4 N.C.
  - 5 Trig. input
  - 6 WEN pulse output
- \*\*Pixel clock output by internal jumper setting.

## Spectral Sensitivity



## Dimensions



Company and product names mentioned in this datasheet are trademarks or registered trademarks of their respective owners. JAI A cannot be held responsible for any technical or typographical errors and reserves the right to make changes to products and documentation without prior notification.

JAI A-S, Denmark  
Phone +45 4457 8888  
Fax +45 4491 8880  
www.jai.com

JAI Corporation, Japan  
Phone +81 45 933 5400  
Fax +81 45 931 6142  
www.jai-corp.co.jp

JAI UK Ltd., England  
Phone +44 1442 879 669  
Fax +44 1442 879 281  
www.jai.com

JAI Vision OY, Finland  
Phone +358 9 8256220  
Fax +358 9 870 3345

JAI America Inc., USA  
Phone (Toll-Free) +1 877 472-5909  
Phone +1 949 472-5900  
Fax +1 949 472-5908  
www.jai.com



THE MECHADEMIC COMPANY

Visit our web site on [www.jai.com](http://www.jai.com)

31010442.05.01.2000