




GE® Hybrid Electric Heat Pump Water Heater

Model GEH50DNSRSA

Preliminary – Subject to change
Updated on 08/18/2009

Model View

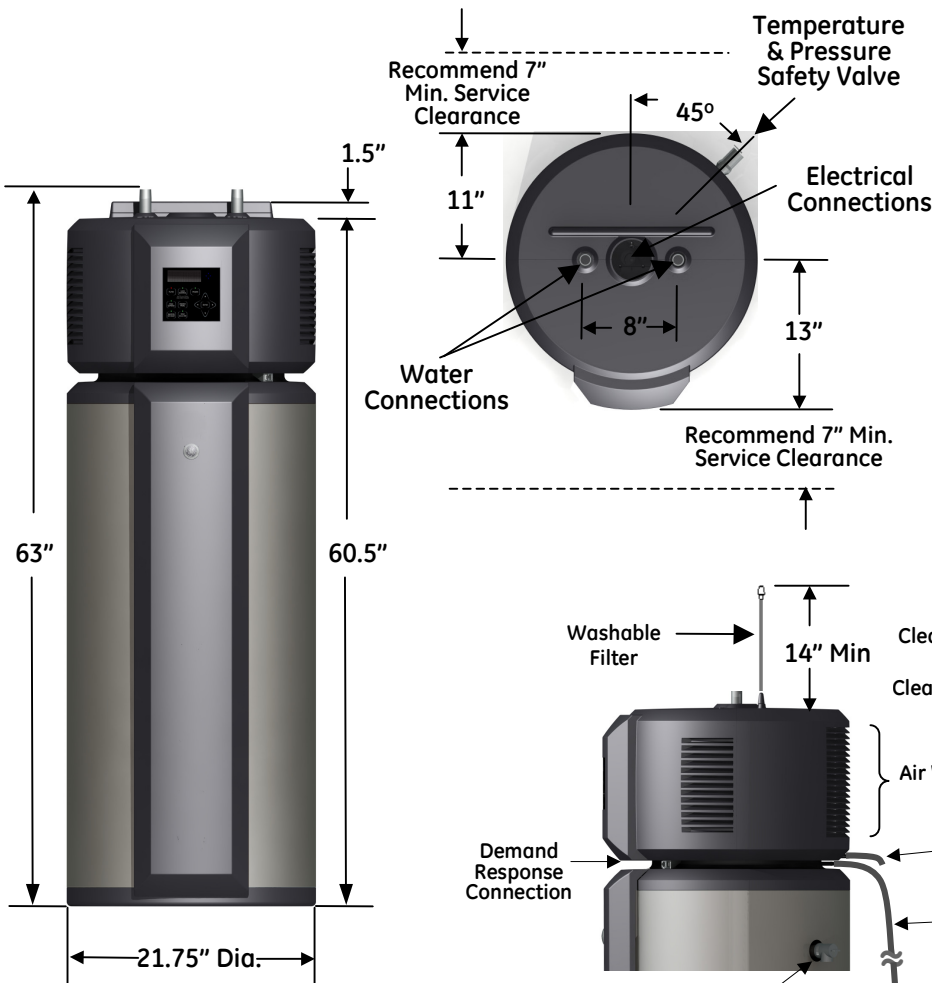

CAPACITY	
Capacity (gallons)	50
First Hour Delivery (gallons)	63
Estimate Yearly Operation Cost (@ \$0.10/kWh)	\$198 in Hybrid Mode
FEATURES	
Fuel Type	Electric
Electronic Controls with LCD Display	Integrated
20 Character x 4 Line LCD Display	Yes
Backlit LCD Display	Yes
Multiple Operating Modes	
eHeat™	
Hybrid (Factory Default Mode*)	2.35 EF
High Demand	
Standard Electric	
Vacation/Away Mode	3 to 90 days
Service Diagnostics	Integrated
Demand Response Ready	Yes
Temperature Setting Range	100 to 140°F
Temperature Setting Factory Default	120°F
Temperature Setting Memory	Yes
Precise Temperature	+/- 3°F
Renewable Air Filter	Washable (included)
Condensate Collector	Integrated (tubing included)*
APPEARANCE	
Color Appearance	Silver Metallic
Color Appearance Code	SA
POWER / RATINGS	
Electrical Power Required	240/208 Volts (L1, L2, Ground), 60 Hz
Electrical Circuit Required	Dedicated 30 Amp Min.
Energy Factor (EF)	2.35 in Hybrid Mode
Electrical Consumption Maximum Heating	4,500 Watts
Electrical Consumption Minimum Heating	550 Watts
Electrical Consumption Standby	2.0 Watts
Operating Air Temperature Range	
eHeat™, Hybrid, and High Demand Modes	45 to 120°F
Standard Electric Mode	32 to 150°F
Operating Water Pressure	20 to 125 PSI
Warranty	
Limited 1-year**	Parts & Labor
Limited 10-year**	2 nd -10 th year parts only

* Condensate tube must be directed into a drain below 36" from the floor, or a condensate drain pump (not included) is required.
**See warranty for details.

Product Weight 200 Lbs.
Shipping Weight 220 Lbs.