

# STEP 1 SETTING UP YOUR DIGITAL VIDEO RECORDER (DVR)



\* This set-up guide assumes you are connecting cameras (not included with this system) to the Lorex DVR. Consult your DVR's owners manual for alternative DVR connection and/or information to install a hard drive.

## Package Contents



- |                                      |                              |
|--------------------------------------|------------------------------|
| 1 - 4 Channel Digital Video Recorder | 1 - Set of Warning Decals    |
| 1 - Power Cord                       | 1 - Owner's Manual           |
| 1 - AV Cable with Couplers           | 1 - Quick Installation Guide |
| 1 - Owners Manual & Warranty         |                              |
| 1 - Need Help Insert                 |                              |

**NOT INCLUDED - CAMERAS / BROADBAND ROUTER**

1

Connect the cameras (not supplied) to the CH1, CH2, CH3, CH4 Video Inputs



BACK OF THE DVR

2

Connect the Power Supply to the DVR; the other end to an electrical outlet



BACK OF THE DVR

3

Ensure the Master Power switch is turned ON (located at the back of your DVR)



BACK OF THE DVR

Your system is now set up. Refer to your DVR's owners manual to learn how to record, playback, use the search features and all other features available with this system. Refer to Step 2 for Setting Up Remote Security Monitoring.



Information in this document is subject to change without notice. As our products are subject to continuous improvement, Lorex Technology and our subsidiaries reserve the right to modify product design, specifications and prices, without notice and without incurring any obligation. E&OE © 2006 LOREX. All rights reserved.



# STEP 2 SETTING UP REMOTE SECURITY MONITORING

Port forwarding Your Router and the Creation of a DDNS Account with Lorex is required in order for you to have Remote Internet Access.

**1** Connect one end of ethernet cable (not supplied) to the DVR, the other end to the broadband router (not included)



**2** Record the MAC Address


To obtain the DVR's MAC address, press the Menu button on the DVR. Use the UP, DOWN buttons and proceed to Network Setup. Press the Enter button and select IP Setup. Press Enter. Record the MAC Address below. Press the ESC button until you EXIT all menu's.



**3** Open your Web Browser. Enter <http://ddns.strategicvista.net>




**4** Select the Create Account Option

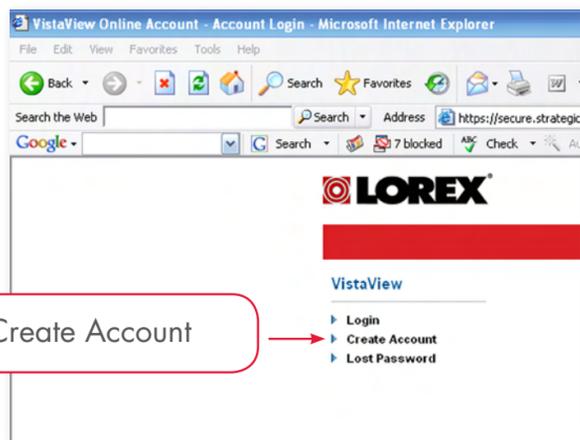


**5** Complete Account Information

- a. For Product License: Select your Product Model Number from the drop down menu (L3104000 Series)
- b. For Product Code enter the MAC address recorded earlier
- c. For URL Request choose a URL Name (not to exceed 15 characters) (e.g. your name, your company etc.)

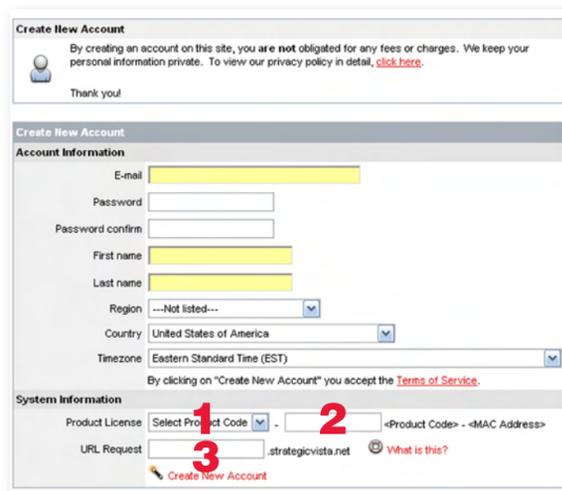

**6** Select the Create New Account Link

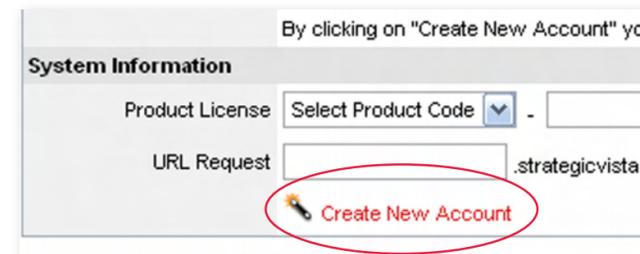

Information in this document is subject to change without notice. As our products are subject to continuous improvement, Lorex Technology and our subsidiaries reserve the right to modify product design, specifications and prices, without notice and without incurring any obligation. E&OE © 2006 LOREX. All rights reserved.



# STEP 2 SETTING UP REMOTE SECURITY MONITORING (continued)

**7** An Automated Confirmation email will be sent to you. Record the information below

Service Provider:	ddns.strategicvista.net
Domain name:	house.strategicvista.net
User name:	John Doe
Password:	<enter the password>

Note: The information sent to you is CASE SENSITIVE

**8** On your DVR, Press the Menu Button. Select the Network Set Option.

DDNS: NO  
Domain:  
Username:  
Password:  
Use Public IP: YES  
DDNS Status:  
APPLY

- Set DDNS to Yes
- Set up the Domain Name, User Name & Password (from Step 6)
- Set Use Public IP to Yes
- Select the Apply Option & Press Enter

The NOT CONNECTED message should change to CONNECTED upon successful completion.

**9**

Port Forward your Router. You will need to Forward ports 2505 and 80.

All routers are different. To Port Forward your Router:

Refer to your Router's manual for specific instructions on port forwarding (or)


Check the Router configuration guide support document in the consumer guide section on our website <http://lorexstore.strategicvista.com/article.aspx?aid=3> and select Router Configuration Guide

**10** Insert CD into the computer's CD ROM



COMPUTER NOT INCLUDED

**11** Select the DVR Manager Icon on the Computer Desktop to launch the DVR Manager Application. Click the CONFIG button to enter DVR SET-UP.

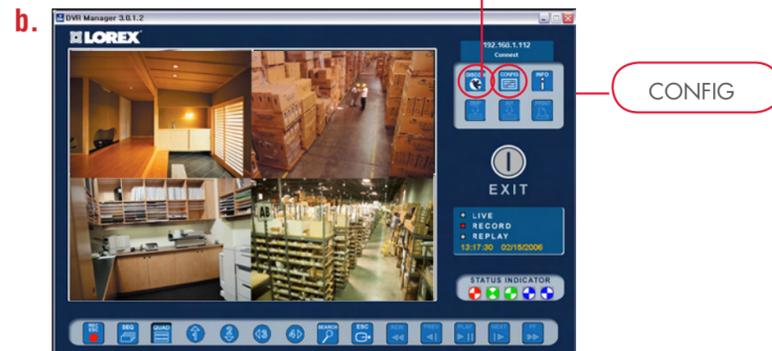

Press the Connect / Disconnect Button to view the Camera images



- BMP SAVE TO: Specify the Save Location for the Image files
- COMM: Specify the connection type as TCP/IP for network connection
- IP: Enter the IP address of the DVR
- PORT: Enter PORT 2505
- ID: Enter the user name Admin
- PW: Enter the default password 11111111
- Click OK to save the settings.

## It's all on the web

- Product Information
- Specification Sheets
- User Manuals
- Software Updates
- Quick Start Guides
- Firmware Upgrades

FOR ADDITIONAL INFORMATION OR TROUBLESHOOTING HELP, REFER TO YOUR OWNERS MANUAL FOR ASSISTANCE. YOU CAN ALSO CALL OR EMAIL FOR FURTHER SUPPORT.

TOLL FREE TECHNICAL SUPPORT: 1-888-42 LOREX (1-888-425-6739)

EMAIL SUPPORT: SUPPORT@LOREXTECHNOLOGY.COM

WEBSITE: WWW.LOREXCCTV.COM

