


## TRIAD 17-IW

DIRECT-INDIRECT

- Semi – indirect light distribution.
- T5 and T8 lamping options.
- Die formed steel perforated housing.
- Nominal illuminated sections – 3', 4', 6' and 8'.
- Precision die cast end caps.
- Articulated joiners between sections.
- Optional slotted perforated pattern.

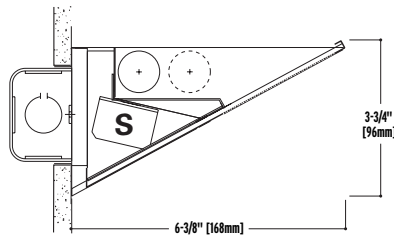

**ORDERING INFORMATION:**  
Sample number: 17W-1T5-56-2EB-SI-RP

**Series**  
17=Triad

**Light Output**  
I=Indirect

**Mounting**  
W=Wall

**Number of Lamps** (per cross section) (not included)  
1=1 Lamp      2=2 Lamps

**Lamp Type**  
T8      T5      T5HO

**Run Length**  
Overall Nominal Run Length\_\_ft. (Any combination of 8', 6', 4' and 3' sections)

**Voltage** <sup>1</sup>  
1=120V      2=277V      U=Universal

**Ballast**  
EB=Electronic Ballast (Standard)      DB=Dimming Ballast  
[Only slim line ballast (small case)]

**Switching**  
SI=Single Switching      DU=Dual Switching

**Perforation**  
RP=Round      BP=None      SP=Slotted

**Emergency**  
EM=Emergency Pack (Consult Factory)

**Fusing**  
GLR      GMF

<sup>1</sup> Due to various constraints, some options may not be combined with others.

### Construction

20-gauge steel housing with staggered round hole pattern backed by white acrylic diffuser. Slotted perforation optional. Nominal 8', 6', 4' and 3' illuminated sections.

### Electrical

120 or 277 or Universal Voltage electronic ballast. Luminaires and electrical components certified to UL and CUL standards.

### Finish


Durable, low gloss, white, powder coated acrylic finish.

### Mounting


Fixture mounts directly to existing structure over a 2"x4" standard electrical box **mounted horizontally** in the wall.

**S** = Slim Line Ballast only.

### MOUNTING HOLE PATTERN

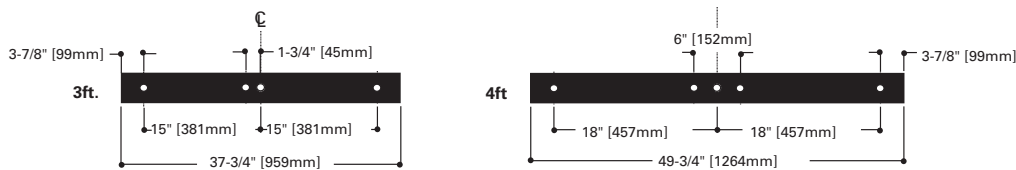

### FEED LOCATIONS

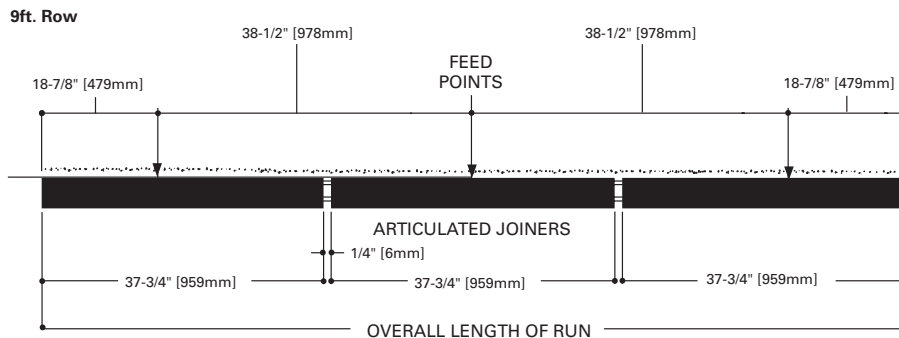

### MOUNTING HOLE LEGEND

- 7/8" DIA. K.O.
- 1/2" DIA. MOUNTING HOLES

NOTES: For complete product data, refer to the Neo-Ray Specification Binder. Specifications and dimensions subject to change without notice. Products may be modified for use in international markets. Please contact your Cooper Lighting Sales Representative for availability and ordering information.