

autOTEK®
EVOLUTION OF POWER

**STREET MACHINE
SUBWOOFERS**

SM12D4 / SM12S4

AUTOTEK

STREET MACHINE SERIES CAR AUDIO SUBWOOFERS

Congratulations on your purchase of the new Autotek Street Machine Series subwoofer system. The Street Machine subwoofer series offer incredible output, great sound quality and outstanding good looks.

- 12-Inch DVC / SVC Subwoofer
- Dual 4-Ohm + 4-Ohm Voice-Coil / Single 4-Ohm
- High Energy Magnet
- Polypropylene Cone
- Poly-Mica Cone Damping
- Multi-Layer High-Temp VC
- Poly Light Dust Cap
- Front-Plate & Voice-Coil Cooling
- Integrated Spider Tinsel-Lead Design
- Hi-Excursion Surround
- Anti-Resonant Magnet Boot

As with all high quality car audio products, we recommend professional installation by an authorised Autotek dealer. Your dealers knowledge and experience can ensure a problem free and cosmetically integrated installation.

If you choose to install the subwoofers yourself, please read the entire manual very carefully.

SUBWOOFER INSTALLATION AND WIRING DIRECTIONS

Enclosure Materials

Typically, 5/8" or 3/4" MDF (Medium Density Fiber Board) is best for most applications. 3/4" MDF is recommended.

Enclosure Build Materials

Connecting joints need to be glued and screwed to ensure no air escapes and joints do not separate under high pressure. Mitered and rabbit joints also help to ensure the enclosure joints are secure.

Bracing

Internal bracing is also recommended to prevent flexing and to strengthen the enclosure.

Note: The volume taken up by the bracing should be added to the total enclosure interior volume.

There are two common bracing methods.

1. **Corner Bracing:** These help prevent the connection joints from separating under heavy vibration and air pressure.

Use 1' x 1" MDF at all interior joints

2. **Diagonal Bracing:** These internal braces connect the top side to the bottom side as well front side to back side. This prevents the wood from bowing or pushing outwards.

Use 1" x 2" with 1" surface contact that is glued and screwed.

Wiring

Wiring Parallel, Series or Parallel/Series will affect the final impedance at the amp and great care must be taken to ensure the amp is not driven below its intended impedance capabilities.

AUTOTEK STREET MACHINE SERIES SUBWOOFERS

Parameters	SM12S4	SM12D4	
Wiring		Parallel	Coils
NomZ	4.284	2.112	Ohm
Sd	0.0087	0.0547	sqM
Revc	3.57	1.76	Ohm
BL	11.82	7.511	TxM
Vas	127.4	116.2	Liter
Cms	299.5	273.1	uM/N
Mms	121.5	121.5	Grams
Fs	26.39	27.64	Hz
Qms	10.19	10.12	
Qes	0.515	0.658	
Qts	0.49	0.618	
no	0.44	0.36	%
SPL@1W	88.5	87.8	dB
Xmax	4.5	4.5	mm
Rms	350	350	Watts
Maxx	700	700	Watts

CLOSED BOX DESIGNS (SEALED)**Standard Boomie (Hip Hop-Rap)**

Box Volume	1.3 / 36.8	1.2 / 34	Cubic Feet / Liters
Qtc	0.983	1.22	
F3	44	42	Hz

Optimal Sound Quality - Flat Response

Box Volume	2.1 / 59.5	2 / 56.6	Cubic Feet / Liters
Qtc	0.829	1.02	
F3	40	37	Hz

VENTED BOX DESIGNS (ROUND PORT)**Standard Tight Bass**

Box Volume	2 / 56.6	2 / 56.6	Cubic Feet / Liters
Fb	37	37	Hz
Port Size (Diam)	3 / 76.2	3 / 76.2	Inches/ Millimeters
Port Length	4.5 / 114.3	4.5 / 114.3	Inches/ Millimeters
F3	35	35	Hz

FEATURES ARE SUBJECT TO CHANGE WITHOUT NOTICE


NOTE: All above box volumes are internal values and already include subwoofer and port displacement. The F3 value represents the -3dB cut off of the enclosure in Hz. Polyfill may be added to sealed enclosures to reach desired Q-Value.

Glossary of Terms


- Q The energy losses of relative damping (ratio of stored to dissipated energy or ratio of reactive to resistive energy).
- F_s Free air resonance of driver in Hz.
- Q_{ms} Mechanical Q.
- V_{as} Volume of air equivalent to driver from the rest position.
- C_{ms} Mechanical compliance of a loud speaker piston.
- M_{ms} Moving mass of total loud speaker piston assembly.
- X_{max} The maximum linear excursion of a loud speaker.
- S_d Surface area of the cone.
- D_{ia} The piston diameter of a loud speaker.
- Q_{es} Electrical Q of a system.
- R_e DC resistance.
- L_e VC inductance.
- P_e Maximum input power.
- Q_{ts} Total Q of the system.
- Sens Sensitivity. An efficiency measurement in dB's.
- V_c Volume of a closed or sealed enclosure
- V_b Volume of a vented enclosure.
- F_c The resonant frequency of a closed or sealed system
- F_b The resonant frequency of a vented system
- F₃ The half-power (-3dB) frequency of a loud speaker enclosure
- Q_{tc} The Q of a loud speaker at F_c in a closed box, considering both it's electrical and mechanical resistance.
- Q_L The Q of a vented box, resulting from all box losses.
- D_V Diameter of vent.
- L_V Length of vent.
- H Height.
- W Width.
- D Depth

SM12S4


SVC 4-Ohms

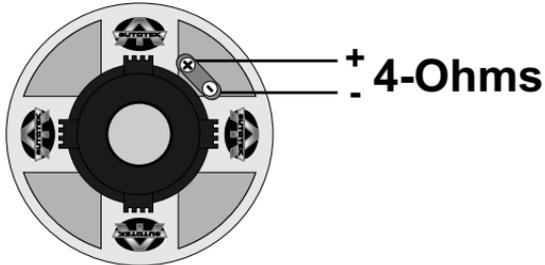

PARALLEL

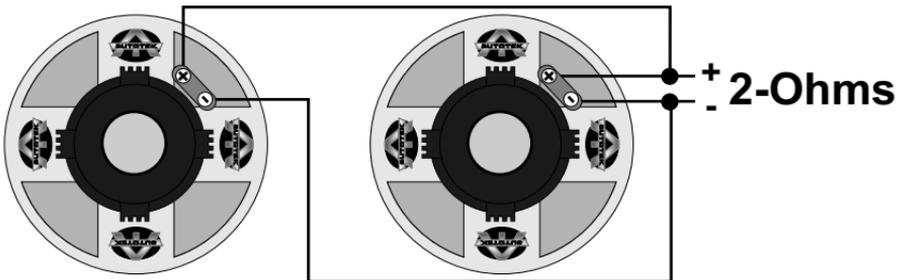


SERIES

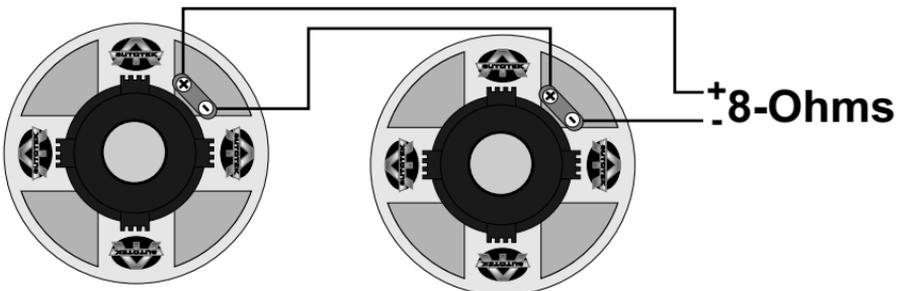


SM12D4 DVC 4-Ohms


PARALLEL

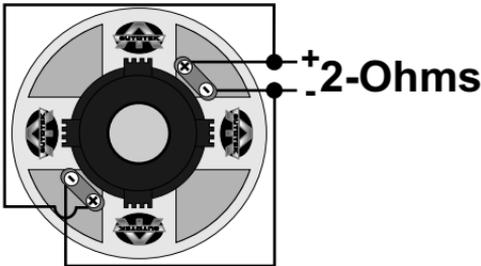


SERIES

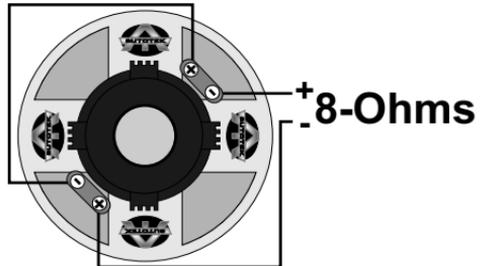


PARALLEL COILS / PARALLEL SUBS

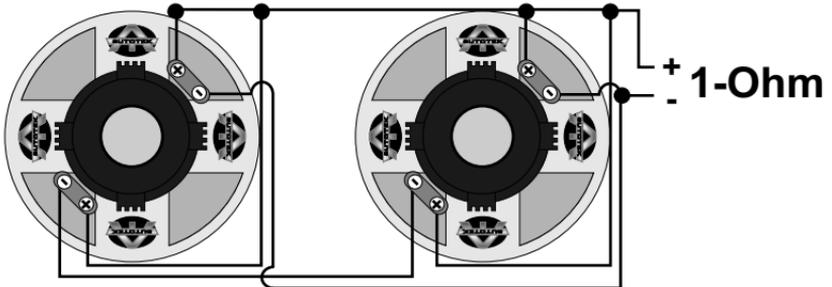

SERIES COILS / PARALLEL SUBS

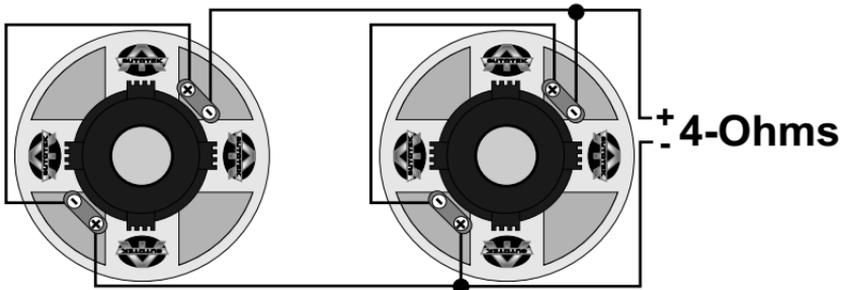

SUBWOOFER DIMENSIONS

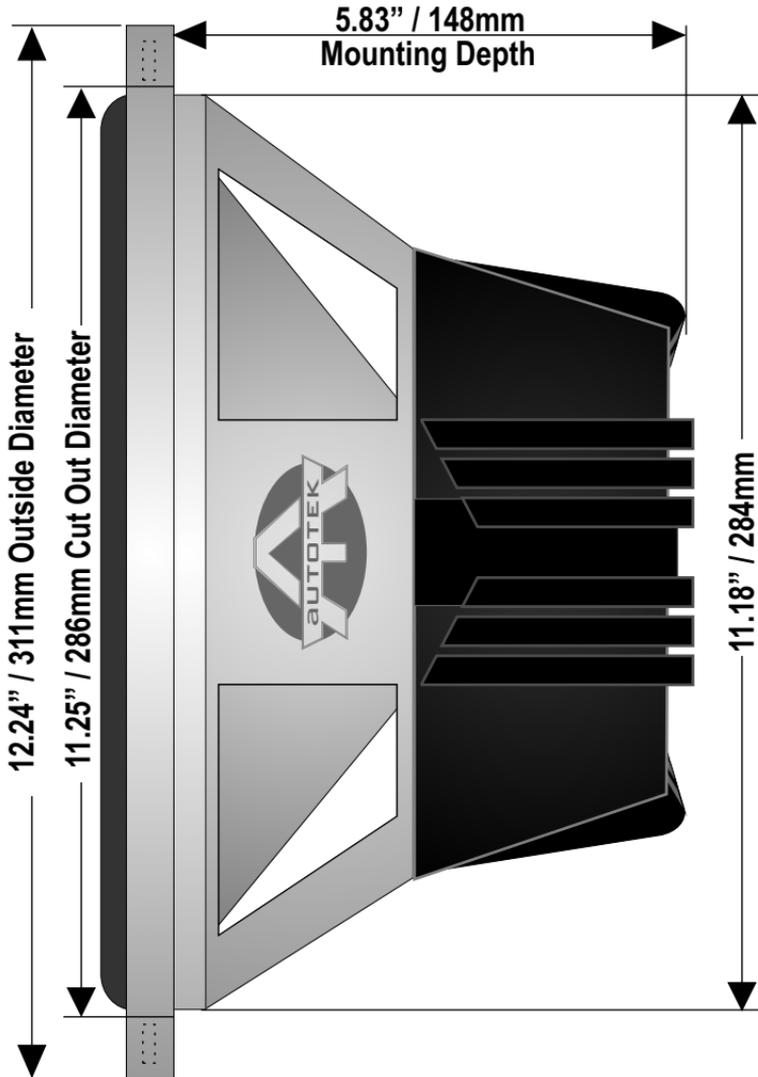

When designing an enclosure for this subwoofer, please ensure to leave atleast 2" of clearance from the back of the motor to the back of the encousre.

Maxxsonics Limited Warranty

As the manufacturer of Maxxsonics, MB Quart, Autotek, Crunch and Hifonics car audio products, Maxxsonics USA Inc. Warrants to the original consumer purchaser the amplifier to be free from defects in material and workmanship for one (1) Year from date of purchase.

All other parts and accessories of the system are warranted to be free from defects in material and workmanship for one (1) year from date of purchase. Maxxsonics will repair or replace at it's option and free of charge during the warranty period, any system component that proves defective in materials and workmanship under normal installation, use and service provided that the product is returned to the authorized Maxxsonics dealer from where it was purchased. A photo copy of the original receipt must accompany the product being returned.

Valid purchase receipts will contain the name and address of the authorized reseller.

Any damage to the product as a result of misuse, abuse, accident, incorrect wiring, improper installation, alteration of date code or bar code labels, revolution, natural disaster, or any sneaky stuff because someone messed up, repair or alteration out side of our factory or authorized service centers and any thing else you have done that you should not have done is not covered.

This warranty is limited to defective parts and specifically excludes any incidental or consequential damages connected therewith. This warranty is not to be construed as an insurance policy.

Warranty on installation labor, removal, re-installation and freight charges are not the responsibility of Maxxsonics USA Inc.

Warranty products damaged as a result of insufficient or improper packing materials are not covered by this limited warranty and such damaged product will be returned "as is" at the expense of the owner.



MAXXSONICS™

Designed and Engineered in the USA

www.maxxsonics.com



MAXXSONICS®

MBQUARTI®

autOTEK®

HIFONDICS®

CRUNCH®

WWW.MAXXSONICS.COM