




ImagePro 8039B Multi-MEDIA LCD Projector

- **Education**
- **Business**

- NEW 400 to 1 Contrast Ratio
- Zoom lens at 1.3x
- 1400 lumen brightness
- SVGA resolution
- Monitor loopthrough
- Extremely easy to use
- Picture-In-Picture

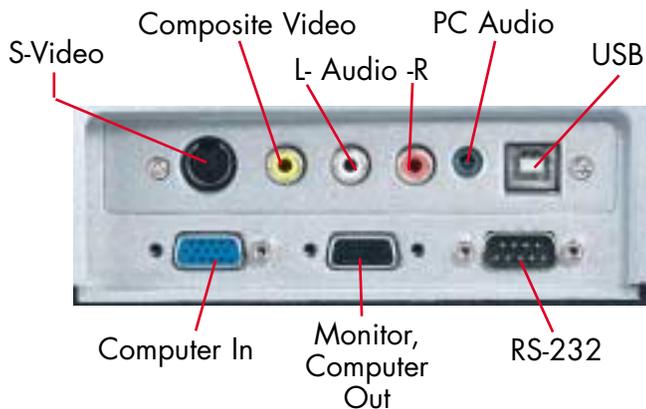

Two year warranty



8039B DUKANE


ImagePro 8039B Multi-Media LCD projector

Great Data and Super Video Images

The Dukane ImagePro 8039B is a multimedia projector that employs LCD elements to generate vibrant full color images. The 8039B accepts signals from sources like a VCR, DVD player, or PC/MAC computer.

Potential applications are placement on tables and carts, or the projector can be permanently installed in a ceiling mount.

This value packed projector has SVGA resolution with advance electronics that permit showing XGA. An IR remote control permits operation from convenient locations and can turn the projector completely "On" or "Off".



- Multi Media Projector
- SVGA 800 x 600 and Compressed XGA 1024 x 768
- 1400 Lumens for a bright image
- 400:1 Contrast Ratio
- HDTV Compatible
- Digital Keystone Correction
- Kensington Lock Slot for security
- Monitor Loop Thru and Picture -In- Picture
- Zoom Lens with a 1.3x range

Projection throw distances for 4:3 Aspect, in inches (feet)

Image Size in inches (feet)			MIN Throw	Max Throw
Diagonal	Width	Height		
60 (5.0)	48 (4.0)	32 (3.0)	71 (5.9)	92 (7.7)
72 (6.0)	57 (4.7)	43 (3.6)	85 (7.1)	111 (9.3)
84 (7.0)	67 (5.6)	50 (4.2)	99 (8.3)	129 (10.8)
100 (8.3)	80 (6.7)	60 (5.0)	118 (9.8)	154 (12.8)
120 (10.0)	96 (8.0)	72 (6.0)	142 (11.8)	184 (15.3)

Minimum distance to screen is 59 inches (4.9 feet)

Specifications

8039B	
Image Element	0.7" polysilicon active-matrix TFT x3
Brightness	1400 ANSI lumens
Resolution	800 x 600 pixels (H X V)
Contrast	400 to 1
Scanning Frequency	fh 30-70 kHz, fv 56-85 Hz
Lens	Manual zoom & focus lens, 1.3X
Lens Throw Ratio	1.48 to 1.91:1, throw distance to image width
Keystone Correction	Digital, vertical +/-15 degree
Aspect Ratio	4:3, 16:9, selectable
Computer Compatibility	SVGA, VGA, XGA, SXGA(Compressed) for PC, and Mac13" and Mac 16"
Video Compatibility	NTSC, NTSC 4.43, PAL, SECAM, S-video, HDTV (1080i, 720p, 575i)
Picture -In- Picture Image Control	Video image in computer Freeze function, electronic magnification and pan
Mouse Control	Using USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	150W UHP
Lamp Life	2000 hours (typical)
Audio	1 speaker x 1 watt
Throw Distance	3.5 to 20 ft.
Screen Size	35" to 200"
Inputs, Video	(1) Min DIN 4-pin, s-video (1) RCA, composite video (1) Audio, Stereo, RCA x 2
Inputs, Computer	(1) Signal: D-sub, 15 pin (1) Audio, PC mini plug
Inputs, Other	15 pin, D-sub RS-232 Service
Outputs Monitor	15 pin, D-sub
Outputs, other	USB for Mouse control
Operating Range	5 to 35 deg. C
Security	Kensington lock slot
Fan Level	36dB, very quiet
Power	AC 100-120V, AC220-240V 50/60 Hz, 220 watt
Size (WxHxD)	10.5" x 3.5" x 11.4"
Weight	5.9 lbs.
Shipping Weight	14 lbs.
Carton Size	19.5" x 10.3" x 17.5"
Accessories Included	Remote control, batteries, power cord, Video cable, Audio cable, RGB cable, operators manual and soft carry case.
Safety	UL/CUL, EC, FCC Class B
Optional Accessories	Lamp 456-242; rolling briefcase; 185-406

Two (2) year limited warranty

on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 12 month Peace-of-Mind Loaner Program.

2YR

DUKANE

Audio Visual Products
2900 Dukane Drive
St. Charles, Illinois 60174
www.dukcorp.com/av



Toll-free: 800-676-2485
Fax: 630-584-5156
E-mail: avsales@dukcorp.com

ImagePro is a registered trademark of Dukane Corporation

#11592-B-04