

# Giant PreRunner Jog Stroller Owner's Manual

## Assembly and Maintenance

### PLEASE READ THE FOLLOWING BEFORE BEGINNING ASSEMBLY:

Before assembling your GIANT PreRunner Jog Stroller all of us at GIANT strongly encourage you to read this manual. In return for the time spent reading this manual and learning about your new GIANT PreRunner Jog Stroller you will be rewarded with many hours of safe usage.



**WARNING! WE RECOMMEND THE USE OF A SAFETY HELMET APPROVED BY THE CONSUMER PRODUCT SAFETY COMMISSION (CPSC) FOR ANY CHILD USING THIS RIDE-ON TOY.**

### WARNINGS!

- Avoid serious injury from falling or sliding out. Always secure child in stroller using the safety harness as described.
- Always wear an approved bicycle helmet.
- Never leave a child unattended in this stroller.
- Always use parking brake when the stroller is stationary.
- A child may slip into the leg openings of the safety harness and strangle unless they are properly secured. Never leave child in this stroller unless they have been properly secured in the safety harness.
- Child must be old enough to sit upright unassisted.
- Do not overload your stroller. Maximum load is 75lbs, including passenger and cargo.
- Make sure your child remains seated in the stroller at all times.
- Use wrist safety straps all the times.
- Be sure the stroller frame is completely unfolded with latching mechanisms secure and wheels locked in the place, before allowing children near the stroller.
- Check that all buckles, snaps, straps and adjustments are secure before each use.
- Check and maintain tire air pressure as specified on the side of tire.

- Do not use your stroller with roller skates or in-line skates. An accident could occur resulting in serious injury or death.
- Insure the stability of the stroller by always carrying heavier items in the lower cargo basket and lighter objects in the seat back pocket.
- Do not hang objects from the stroller. This could destabilize the stroller.
- Avoid hitting obstacles with wheels.
- Read and understand entire owner's manual prior to use.
- Keep children away from plastic packaging.


### Assembly

Before assemble your Giant PreRunner Jog Stroller. Please check that you have all the following parts:

- Main Frame x 1
- Foot Rest x 1
- Front Wheel x 1
- Bolts set for Footrest installation
- Rear Wheels x 2
- 6mm hex key wrench
- Handlebar & Stem x 1

### MAINTENANCE:


Your GIANT PreRunner is a quality Jog Stroller. It has been constructed utilizing quality components and fasteners. Contact your local Authorized GIANT Retailer for replacement parts and service. With periodic maintenance, common sense usage, and care this Jog Stroller can provide many years of using enjoyment. Periodically check all of the fasteners to insure that everything is securely tightened. Check the handlebars to make sure that they secure. Replace any broken or worn parts as necessary.



### STEP #1 - Install Rear Wheels

- Firmly depress the gray button marked push.
- Insert the rear wheel into rear axle tube on the rear frame stay.
- Release button and test wheel is locked in place. If not, try again. The wheel must be firmly locked in place.
- Repeat the process for both rear wheels.


### STEP #2 - Install Front Wheel



#### a. PreRunner LX, 20" Wheels

- Firmly depress the gray button marked push.
- Insert the front wheel into axle tube on the front fork.
- Release button and test wheel is locked in place. If not, try again. The wheel must be firmly locked in place


#### b. PreRunner, 16" Wheels



- Move quick release lever so that the word "OPEN" stamped on the lever arm shows to the outside.
- Insert the front wheel between the fork blades so that the axle seats firmly at the top of slots, which are at the tips of fork blades - the fork dropout.
- Flip quick release lever so that the word "CLOSED" stamped on the lever arm shows to the outside.
- Closing quick release lever should get progressively firmer until it is solidly fixed in the closed position.
- If quick release lever cannot be fully closed, loosen thumbnut on the opposite end of the skewer and try to close it again.
- If the lever goes to the closed position too easily or feels loose in the closed position, open the lever and tighten thumbnut, then try closing again.
- Quick release lever should be parallel to the front fork blade when in final closed position.




**CAUTION: DO NOT operate stroller if wheels do not firmly lock in place.**



### STEP #3 - Install the Handlebar & Stem Assembly

Giant PreRunner Jog Stroller has bicycle style handlebar and stem that allows the handlebar height to be adjusted to accommodate a wide variety of users.

- Loosen the handlebar binder bolts then remove the stem clamp -(Fig. a), and keep the bolts on the stem.
- Fit the stem and clamp-(Fig. a) on the plastic shim at the top of the stroller frame then tighten the handlebar binder bolts so that the stem will stay in place by itself, but is still easy to adjust.
- Try to find the best position for the user and tighten the handlebar and stem binder bolts.
- Push down the handle bar to raise the front wheel to test that the Be bolts were sufficiently tightened.




### STEP #4 - Install the Footrest fender on the Frame

- Assemble footrest fender as shown in the diagram.
- Align the heads of the bolts to fit into the matching recesses in the footrest fender.



**CAUTION: Avoid crushing the frame tubing DO NOT OVER TIGHTEN BOLTS! Tighten only until hand snug.**

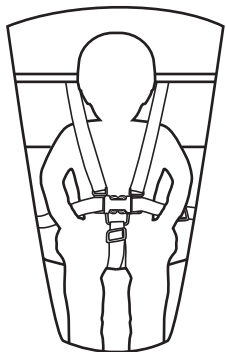

#### STEP #5 - Safety Harness Instructions

- Open the buckle by depressing the tabs on the top and bottom simultaneously. Be sure to release both sides of the buckle.
- Move the harness straps out of the way and place the child in the stroller.
- Put the child's arms through the loops formed by the shoulder/lap straps so that harness lays over the child's shoulders.
- Fasten the buckle by inserting the tabs from the shoulder/lap strap into the buckle until you hear an audible click confirming that the buckle is secured.
- The tops of the shoulder straps should be parallel to or higher than the shoulders of the child. If they are not, remove the shoulder from the anchor strap and refasten to the anchor strap that allows you to achieve the desired position of the shoulder strap.
- If the child is too large for the straps to be adjusted properly do not use this stroller.



**Caution: Make sure both shoulder straps are the same length.**

#### STEP #6 - How to fold the Giant PreRunner Jog Stroller

- Push the safety button and pull the folding triggers on both sides of frame then push down. The stroller can be folded simply.
- Use the fabric handle found between seat and footrest, which can be used to carry the stroller for a short distance.
- To unfold, lift the stroller by handlebar, and the stroller should unfold automatically. Be sure the post inside the folding hinge is locked into the frame tubing and the safety button on the folding trigger is extended.

#### STEP #7 - How to use the Giant PreRunner Jog Stroller braking system

- Your Giant PreRunner stroller uses a braking system similar to a bicycle. There is a brake lever at the handlebar that is connected to a brake mechanism at the front wheel.
- Squeeze the brake lever to make sure that it moves freely, but does not bottom out against the handlebar.
- Before using the stroller with a child test the brake and make sure that you can cause the front wheel to seize using the brake lever.
- If not, use the barrel adjusters at the brake lever and the brake mechanism on the front wheel to adjust the cable tension until the brake works to your satisfaction.
- The brake lever can also function as a parking brake. To engage the parking brake squeeze the brake lever and depress the button on the brake lever body until it engages. To deactivate, squeeze the brake lever until the parking brake button pops out.
- **WARNING! Do not attempt to use the parking brake on a hill! Do not leave a child unattended in the stroller even if the parking brake is engaged!**



You're should now be ready to use.  
Copyright 2004 GIANT Bicycle Inc. all rights reserved 1/2004