


LIGHTOLIER® Performance Recessed CFL Downlighting 1001FDL

Page 1 of 1

5" Aperture, 1 Light, Compact Fluorescent, Non-IC, Dimming, Frame-In Kit

UniFRAME

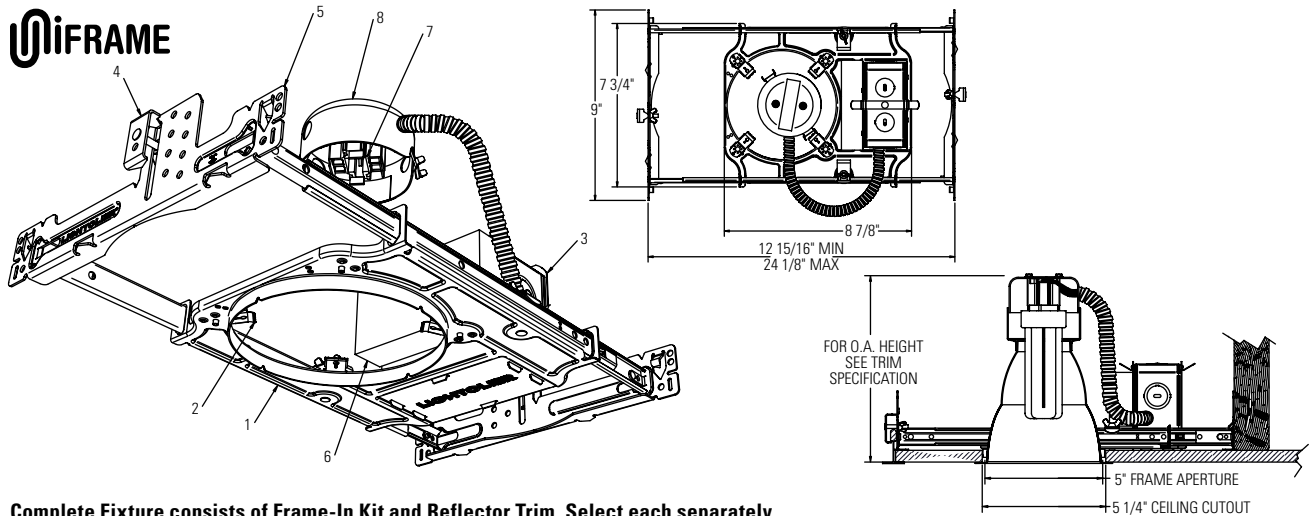

Complete Fixture consists of Frame-In Kit and Reflector Trim. Select each separately.

UniFrame™ Frame-In Kit	UniFrame™ Compact Fluorescent Performance Series Reflector Trims							
	Vertical Open	Vertical Wall Wash - Single	Vertical Wall Wash - Double	Horizontal Open	Horizontal Wall Wash - Single	Horizontal Wet Location Lensed / Diffused		Horizontal Cross Blade
1001FD26L1 (Lutron**26w – 120v) 26w Triple GX24q-3 Base 120v – 0.26amp max	1001CL 1001CD 1001WH	1001CLSW 1001CDSW 1001WHSW	1001CLDW 1001CDDW 1001WHDW	1001HCL 1001HCD 1001HWH	1001HCLSW 1001HCDSW 1001HWHSW	Clear Lens 1001HCLC 1001HCDC 1001HWHC Opal Lens 1001HCLO 1001HCDO 1001HWHO	Fresnel 1001HCLF 1001HCDF 1001HWHF	1001HACB 1001HWHCB
1001FD26L2 (Lutron**26w – 277v) 26w Triple GX24q-3 Base 277v – 0.12amp max	Universal Series Reflector Trims (Reference Trim Spec Sheet for Recommended Lamping)							
	Performance Cone	Cone	Satin Cone	Baffle	Wet Location			
	1013CFL 1013CDCFL	1012* 1013* 1013BK* 1013WH 1013CD* 1071 1045 1046 1046CD	1008* 1010*	1005* 1005BNM 1005WH 1076 1076WH	1024 1078			
**Lutron Compact SE 5%								
*Add NM suffix to catalog number for Natural Metal flange and finish.								

Features

- Mounting Frame:** .036" (#20ga.) Galvanized Steel. Accommodates all ceilings up to 1-1/2" thick; including existing or inaccessible areas.
- Trim Clips:** "Push In / Twist Out" Stainless Steel clips hold reflector flush to ceiling.
- Junction Box:** 2" x 4" x 3-1/2" (22cu.in.) .032" (#22ga.) galvanized steel. UL Listed for maximum of 8 (#12ga.) through branch circuit conductors.
- UniFrame™ Mounting System – Grid Ceiling:** Tool free mounting in grid ceilings. .036" (20ga.) Galvanized Steel interlocking slide bars adjust to 24-1/8" long accommodating 24" O.C. Ceiling Grid. Adjustable speed clamps for positive attachment to grid ceiling systems.
- UniFrame™ Mounting System – Wood Joist Ceiling:** Integral nailing tabs, alignment guides, fastener holes and bendable strapping guides for wood joist installation. Galvanized Steel interlocking slide bars adjust from 12-15/16" to 24-1/8" long to accommodate 16" and 24" O.C. joist spacing, with or without strapping.
- Ballast:** 120V – 277V UL Listed Electronic Ballast, end of lamp life protection, class "P" thermally protected, class "A" sound rating.
- Socket:** Four-pin base, molded thermoplastic socket, prewired with No. 18 AWM leads to ballast.
- Socket Housing:** .036" (#20ga.) Galvanized Steel housing attaches to reflector trim by spring clip for precise optic alignment.

Labels

cULus Listed. Suitable for Damp Locations.

Accessories

1967B Extra Thick Ceiling Adapter (1 1/2" to 2" thk)

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Notes:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • E0708