KONICA 7022. Turns your office into a multi-office.

Your customers expect utmost flexibility from you? Fine, because you print, copy, scan, fax, and e-mail with the KONICA 7022.




DOCUMENT PROCESSING*

- High paper capacity of up to 2,550 sheets
- Paper sizes A5 to A3
- Finishing & multi-position stapling
- Direct, unlimited duplexing (standard)
- Extensive variety of image & document editing features
- Excellent image quality with KONICA polymerized toner

MULTI-COMMUNICATION*

- Fast G3 fax
- Printing & scanning with 600 x 600 dpi
- Scan-to-Email /-HDD /-FTP
- PC-Fax & Internet Fax



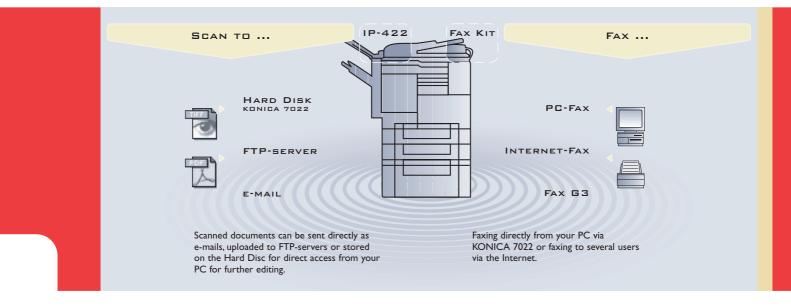

The new KONICA 7022 Document Communication System combines innovative document and information technologies in one ultra-compact system. Without time-consuming delays your team or office can now take care of all tasks around the distribution of documents.

Some multi-office examples: Charts, reports, brochures, letters and presentations.

Created on the computer, with illustrations or photos scanned via the KONICA 7022, printed and automatically stapled in the optional finisher.

You want to quickly fax or e-mail a few pages from your documentation? Also no problem, thanks to the various optional extensions available for KONICA 7022.



SPEED*

- 22 A4/14 A3 pages per minute
- Simple & straightforward operation
- Optimised productivity and flexible output management
- Fast original feeding with 30 opm
- Programmable output trays



SPECIALS*

- KRDS Remote Diagnostic System: remote hardware diagnosis and software updates via integrated fax kit, PSTN, or GSM modem
- KPPM cluster printing: connection of various KONICA Document Systems to one cluster
- KONICA paperport: efficient management of documents, images and web pages, including intelligent scan and image editing functions



NETWORK CONFIGURATION*

IP-011 and Easycom Xpress NIC
IP-422 with standard NIC: PCL5e compatible, PostScript 3 available

*Functionality depends on system configuration.

Туре	Power Supply	
Desktop model with fixed platen	230V, 50Hz	
Process Electrostatic laser copy	Dimensions (WxDxH) 590 x 595 x 730 mm (main body)	
User Operation	Weight	
Touch sensitive display with detailed user instructions, Check/Help Mode, Proof Copy	approx. 73 kg (main body)	
Copies/prints per minute	Optional Accessories	
22 pages (A4), 14 pages (A3)	Option	Description
FCOT	CV-109	Platen cover
5 seconds	DF-314	Document feeder, 50
Warm-up time 30 seconds or less	DK-109 or LT17	35–135 g/m², 30 OPN Pedestal
Original Processing/Feeding	DB-210	Drawer base unit wit
Electronic RDH, Face-up, 1-to-N		loading universal tray sheets each, 60–90 g/
Resolution Scanning/printing 600 × 600 dpi	DB-410	LCT with 1,500 shee 60–90g/m ²
Image Memory 32 MB standard, 288 MB max. (ie. 32MB + 256 MB)	IT-101	Inner Output Trays (u 100 sheets)
Exit Tray	FS-107	2-Tray finisher for ma
100 sheets		sheets, A5 - A3, 50 sh
Copy/Print Quantity Selection	FT-107	stapling
Up to 999	FI-107	Additional finisher tra be added to FS-107)
Exposure Automatic or Manual, 2 user sets	Memory Upgrades	64 MB, 128 MB, 256
Magnification		
Fixed Ratios: 1:1; Reduction: 0.71/0.82/0.86 Enlargement:	Printer Options	
1.15/1.22/1.41; 3 special ratios (user setting), Zoom	IP-011	
25%–400%, adjustable in 1% increments, bi-di zoom	Print Speed	22 ppm
Paper Sizes A5-A3	Resolution Paper Size	600 x 600 dpi A5–A3
Paper Supply	PDL	WinStyler (Hostbase
Two front-loading universal trays with 500 sheets each;	CPU	Power PC 401 GF
multi-sheet bypass for 50 sheets	Host Interface Printer Drivers	IEEE1284 Centronics Win95/98/NT4.0/200
Paper Weight	Network Protocols	Win95/98/NT4.0/200
60–90 g/m ² (from tray); Special paper 50–130g/m ² (from bypass)		(LPD/LPR, IPP, FTPser
Duplexing (standard)		SMTPclient, HTP, SNN Netware3.x/4.x: IPX/S
Direct unlimited duplexing, A5–A3		Pserver, Apple: Ether
Special Functions	Memory	16 MB (max. 80 MB)
Job Reservation (5), Memory Copy, Booklet Mode,	Special Functions	Print Quality Setting,
Image Rotation, Electronic Sorting (without finisher), Image Repeat, Image Insert, 2-in1/4-in1/8-in1, Density Shift,		Paper Tray Selection, Size Selection, Zoom,
Original Quality Non-Image Area Erase, Auto Layout,		Selection, Sort/Staple
Reverse Copying, Chapter/ Cover & Sheet Insertion,		Alternate Sort (with
OHP-Interleave, Image Shift, Reduce & Shift, Book Copy,		Duplex, Overlay, Boo
Frame & Fold Erasure, Mixed Originals (with DF), Stamp, Watermark, Job Memory, Copy Interrupt, APS, ATS, Auto	Network Card	Cover, N-up, Waterm EasyCom Xpress prir
Reset, Auto Shut Off, Power Saving, Self Diagnostic	Network Card	(Ethernet 10/100 Bas
System, Electronic Key Counter (128 codes), Weekly		
Timer, List Report, Fail Safe Function, KRDS, customisable		
Application Screen (key operator), etc.		
The availability of the special functions listed above	All indications regard	ling paper, original and
depends on the optional accessories installed on	capacities refer to th	e max. capacity based o
KONICA 7022.	80g/m² paper.	

IP-422 Print Speed 22 ppm 600 x 600 dpi Resolution A5–A3 Paper Size PDL PCL5e compatible, PS3 (optional) CPU 133 Mhz IEEE1284 Centronics Host Interface Win95/98/Me/NT4.0/2000,XP, Printer Drivers Mac OS (PS3 only) TCP/IP, LPD/LPR, IPX/SPX, IPP, Network Protocols FTPserver, FTPclient, SNMPclient, HTTP, SNMP, EtherTalk 0 sheets A5–A3, Standard Memory 64 MB (max. 128 MB) Print Quantity Setting, Orientation, Paper Tray Selection, Output Paper Special Functions ith two front-Size Selection, Zoom, Sort/Staple ys with 500 g/m² (with finisher), Duplex, Password Printing, Overlay, Booklet, Front/ ets, A4, Back Cover, N-up, Watermark, Smoothing, OHP, Toner Save, upper 50, lower PC-Fax/Internet-Fax with optional FK-102 (from autumn 2002), etc. ax. 1.100 Network Card heet/3 position (standard) Ethernet 10base-T/100base-TX Hard Disk PCMCIA, 1 or 2 GB ray (max. 2 can PS-343 Optional PostScript up-grade (PS3) MB MU-411 64 MB expansion module TWAIN driver; scan to e-mail/ Network Scanner ftp/HDD Cluster Printing KPPM (optional software) Fax Option FK-102 Compatibility G3 e printer) 33.6 Kbps Modem Speed 2 seconds (A4) Scanning Speed Transmission Speed 3 seconds (A4R) 000 00:TCP/IP Scanning Resolution max. 16pels/mmx15.4lines/mm erver/client/ Transmission Res. max. 400 x 400 dpi 256 grey scales MH, MR, MMR, IBIG IMP) Novell Half Tones Coding /SPX, NDS, Memory Original Size 2 MB standard (16 MB max.) ·Talk max.A3 Recording Size max.A3 . Orientation. One-Touch Dials 40 Output Paper 200 n, Exit Tray Abrreviated Dials Program/Group Dials 40 Special Functions Bro e (with finisher), Broadcasting Transmission, Quick Memory Transmission (fax while out finisher), oklet. Front/Back scan), Rotational Transmission/ nark, etc. Receiving, Book Copy Transmission, int server 2-in-1 Transmission/Recording, se-T) Duplex Recording, Remote Multi-Printing, PC-Fax with IP-422, etc.

Technical Specifications subject to change without notice!

acity based on standard Status: 2/2002. Latest valid technical specifications can be obtained from your KONICA partner.

output

Your KONICA partner



KONICA 7022

DOCUMENT COMMUNICATION SYSTEM



