

## RANGE COMPOSITION

N 900: a range of over 150 models for the professional caterer designed to guarantee the highest level of performance, reliability, energy saving, safety standards and ergonomic operation. These concepts are reflected in the total modularity of the range that ensures innumerable configurations, either free-standing, bridged or cantilever. N900 demonstrates how advanced technology can satisfy the needs of the professional caterer. The models detailed on this sheet are 4/6 burner gas boiling tops with cast iron grids.



Model 200101

# N 900

## 4/6 BURNER GAS BOIL. TOPS - cast iron grids **ZANUSSI** PROFESSIONAL


### FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Burners with optimized combustion interchangeable on site, flame failure device and protected pilot light:
  - 60 mm burners with continuous power regulation from 1,5 to 6 kW
  - 100 mm burners with continuous power regulation from 2,2 to 10 kW
- ◆ Manual ignition of the top burners.

- ◆ Worktop in 20/10 stainless steel. Front and side panels in stainless steel with Scotch Brite finish.
- ◆ All models have right-angled side edges to allow flush-fitting joins between units, eliminating gaps and possible dirt traps.
- ◆ Cast iron grids.
- ◆ All gas appliances are supplied for use with natural gas, with LPG conversion jets supplied as standard.

- ◆ The special design of the control knob system guarantees against water infiltration.
- ◆ All models can be easily mounted on open base cupboards, bridging supports or cantilever system.
- ◆ IPX5 water protection.
- ◆ Main connections can be via the base or the rear of the unit.

TECHNICAL DATA				
CHARACTERISTICS	MODELS			
	NCG800C 200151	NCG801C 200159	NCG1200C 200153	NCG1201C 200160
Power supply	Gas	Gas	Gas	Gas
External dimensions - mm				
width	800	800	1200	1200
depth	900	900	900	900
height	250	250	250	250
Back burner dimensions - mm	Ø 100, Ø 60	Ø 100, Ø 100	Ø 100, Ø 60, Ø 100	Ø 100, Ø 100, Ø 100
Back burners power - kW	10, 6	10, 10	10, 6, 10	10, 10, 10
Front burners dimension - mm	Ø 60, Ø 60	Ø 100, Ø 100	Ø 60, Ø 60, Ø 60	Ø 100, Ø 100, Ø 100
Front burners power - kW	6, 6	10, 10	6, 6, 6	10, 10, 10
Total Power - kW	28	40	44	60
Net weight - kg.	79	79	110	110

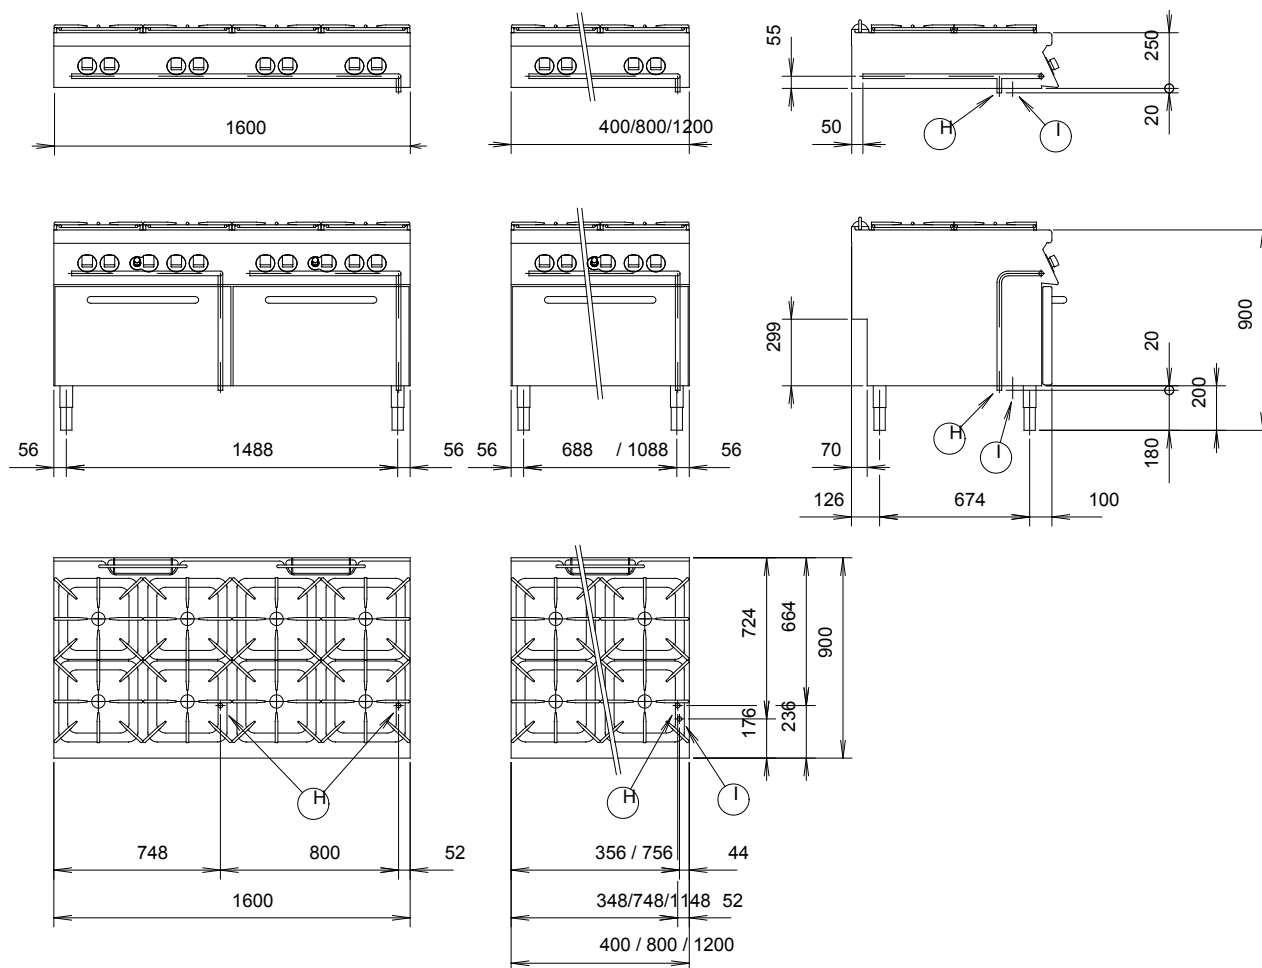

LEGEND				
	NCG800C 200151	NCG801C 200159	NCG1200C 200153	NCG1201C 200160
H - Gas connection	1/2"	1/2"	1/2"	1/2"

OPTIONAL ACCESSORIES	MODELS			
	NCG800C 200151	NCG801C 200159	NCG1200C 200153	NCG1201C 200160
2 SIDE COVERING PANELS FOR TOP-D=900MM	206278	206278	206278	206278
CHIMNEY UPSTAND 1200MM			206306	206306
CHIMNEY UPSTAND 800MM	206304	206304		
FRONTAL HANDRAIL 1200 MM	206191	206191	206191	206191
FRONTAL HANDRAIL 1600 MM	206192	206192	206192	206192
FRONTAL HANDRAIL 400 MM	206166	206166	206166	206166
FRONTAL HANDRAIL 800 MM	206167	206167	206167	206167
JUNCTION SEALING KIT	206086	206086	206086	206086
LARGE HANDRAIL(PORIONING SHELF)400 MM	206185	206185	206185	206185
LARGE HANDRAIL(PORIONING SHELF)800 MM	206186	206186	206186	206186
PAIR OF COVERING STRIPS FOR END ELEMENTS	206234	206234	206234	206234
PRESSURE REGULATOR FOR GAS UNITS	927225	927225	927225	927225
S/S GRID FOR DOUBLE BURNER-900 LINE	206298	206298	206298	206298
SIDE HANDRAIL-RIGHT/LEFT HAND	206165	206165	206165	206165
SINGLE BURNER RIBBED PLATE	206172	206172	206172	206172
SINGLE BURNER SMOOTH PLATE	206171	206171	206171	206171
SINGLE BURNER(6KW)RADIANT PLATE-900 LINE	206170	206170	206170	206170
WATER COLUMN EXTENSION FOR 900 LINE	206290	206290	206290	206290
WATER COLUMN WITH SWIVEL ARM	206288	206288	206288	206288



www.zanussiprofessional.com