


Product highlights

- *50Hz Contrast Plus*
- *Active Control*
- *Dolby Pro Logic surround*
- *NEXTVIEW (type 2)*
- *440 pages EasyText teletext (level 2.5)*
- *Improved Graphical User Interface*



Product highlights

- *50Hz Contrast Plus*
- *Active Control*
- *Dolby Pro Logic surround*
- *NEXTVIEW (type 2)*
- *440 pages EasyText teletext (level 2.5)*
- *Improved Graphical User Interface*




Product highlights

- *50Hz Contrast Plus*
- *Active Control*
- *Dolby Pro Logic surround*
- *NEXTVIEW (type 2)*
- *440 pages EasyText teletext (level 2.5)*
- *Improved Graphical User Interface*



Product highlights

- *50Hz Contrast Plus*
- *Active Control*
- *Dolby Pro Logic surround*
- *NEXTVIEW (type 2)*
- *440 pages EasyText teletext (level 2.5)*
- *Improved Graphical User Interface*




Product highlights

- *50Hz Contrast Plus*
- *Active Control*
- *Dolby Pro Logic surround*
- *NEXTVIEW (type 2)*
- *440 pages EasyText teletext (level 2.5)*
- *Improved Graphical User Interface*




Product highlights

- *50Hz Contrast Plus*
- *Active Control*
- *Dolby Pro Logic surround*
- *NEXTVIEW (type 2)*
- *440 pages EasyText teletext (level 2.5)*
- *Improved Graphical User Interface*



Product highlights

- *50Hz Contrast Plus*
- *Active Control*
- *Dolby Pro Logic surround*
- *NEXTVIEW (type 2)*
- *440 pages EasyText teletext (level 2.5)*
- *Improved Graphical User Interface*



Product highlights

- *50Hz Contrast Plus*
- *Active Control*
- *Dolby Pro Logic surround*
- *NEXTVIEW (type 2)*
- *440 pages EasyText teletext (level 2.5)*
- *Improved Graphical User Interface*



Product highlights

- *50Hz Contrast Plus*
- *Active Control*
- *Dolby Pro Logic surround*
- *NEXTVIEW (type 2)*
- *440 pages EasyText teletext (level 2.5)*
- *Improved Graphical User Interface*




Product highlights

- *50Hz Contrast Plus*
- *Active Control*
- *Dolby Pro Logic surround*
- *NEXTVIEW (type 2)*
- *440 pages EasyText teletext (level 2.5)*
- *Improved Graphical User Interface*




Product highlights

- *50Hz Contrast Plus*
- *Active Control*
- *Dolby Pro Logic surround*
- *NEXTVIEW (type 2)*
- *440 pages EasyText teletext (level 2.5)*
- *Improved Graphical User Interface*



Product highlights

- *50Hz Contrast Plus*
- *Active Control*
- *Dolby Pro Logic surround*
- *NEXTVIEW (type 2)*
- *440 pages EasyText teletext (level 2.5)*
- *Improved Graphical User Interface*




Product highlights

- **50Hz Contrast Plus**
- **CrystalClear III with Dynamic Contrast and Scavem**, offers a crisp and natural picture
- **Dolby Pro logic surround**
For lifelike sound experience, including 3D surround
- **NEXTVIEW Program Guide (type 2)**
Direct access of program info of selected channel and direct program category selection
- **440 Pages EasyText teletext (level 2.5)**
- **Active Control**
Auto Digital Noise Reduction, Auto Sharpness, Auto Color, Auto contrast and Smart Controls. Automatically offers the best picture setting.
- **Improved Graphical User interface**
Easy menu control of all functions
- **Full digital sound processing**

Supporting Features

- Blackline-S Ultra Flat picture tube
- Colour Transient Improvement (CTI)
- EasyTune (auto store, ACI and ATS)
- EasyLink + Nextviewlink
- Low power standby
- 110W music output incl surround
- Integrated centre speaker
- Dynamic Bass Enhancement
- 3 Loudspeakers + 2 surround
- Independent headphone volume control

Surround sound modes

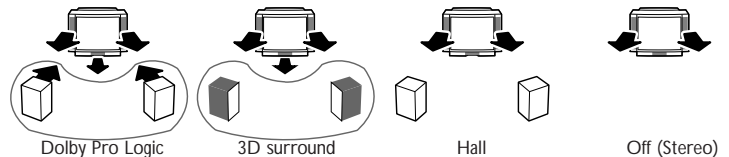

Technical specifications

Chassis

- Type: FL8a MG

Picture

- Screen diameter: 29"/72cm
- Visible screen size: 68cm
- Picture tube: Blackline-S Ultra Flat 4:3
- Image stability: 50Hz
- S-Video display
- Smart Picture control (5 modes)
 - Soft, Natural, Rich, Multi media, Personal
- Brightness, contrast, tint, sharpness, colour control

Sound

- Sound system: 4 speaker HiFi stereo
- Output (total): 110W music output
- NICAM stereo
- Frequency response:
 - 20Hz-15kHz, +1/-3dB (ampl.)
- Loudspeakers:
 - 2 x Main 2x6"
 - 1x centre speaker 2x6"
- Smart Sound control
 - Movie, Speech, Music, Multimedia, Personal
- 5 band graphic equaliser
- Surround sound speakers packed by

Operation

- Easy Easymenu driven installation and operation. Direct acces menu's and cursor control
- Selection of 18 menu languages
- 100 preselections
- Multi-function RC handset controlling
 - TV, VCR, Sat, DVD

- On screen status display on programmes and functions (OSD)
- Sleptimer up to 180 minutes
- Electronic lock for parental control
- Favourite programme selection
- Programme title display (transmitted by TXT)
- On screen menu display:
 - Picture menu, Sound menu, Features menu, Dolby menu, Program list, Set-up menu, Installation menu, Program name giving, Language and country selection
- Dealer message and demo modes
- Dealer Link: wireless communication for installation and service

Reception

- Tuning system: 100 fold PLL
- Colour transmission systems
 - Off-air: /05, /19, /12, /58
 - PAL B/G/I + SECAM B/G/L/L'
 - SECAM D/K
- A/V connections:
 - PAL B/G
 - PAL I (UK only)
 - SECAM B/G
 - NTSC video play back
- Channel selections: 120 channels
 - VHF, UHF, S-Channels, Hyperband
- Frequency range: (47.25-855.25MHz)
- Aerial input: 75 Ohm (Coax)
- VCR preselections: 0: 50-99
- Frequency / Channel selection (Germany, Austria and Benelux only)

Teletext

- EasyText teletext (level 2.5): fast access to preferred pages and subcode page scroll
- Recept. standards: WST / TOP / FLOF
- Page memory: 440 pages A.I. used for
 - Habit watch, preferred page and subcode page lists
 - favorite pages
- Program independent subtitles

Remote Control


- RC type: RC 25xx
- Cursorcontrol

Connections

- Front
 - S-Video in
 - video CVBS-in (cinch)
 - audio L/R-in (cinch) with automatic mono switching
 - headphone jack 3.5mm
- Rear
 - Euro A/V connector (RGB-in; CVBS-in/out) with auto image format detection
 - Euro A/V connector (RGB-in; Y/C-in/out; CVBS-in/out) with WYSIWYR select and image format detection
 - Euro A/V connector (CVBS-in)
 - 2 audio-out (cinch)
 - Constant/Variable level
 - surround sound out (cinch)
 - surround sound out (clickfits 4x)

Miscellaneous

- Ambient temperature : +5/+45°C
- Mains : AC 220-240V ± 10%
- Power consumption:
 - <115W; Stand by: 0,3W
- Weight: 39.5 kg (excl. packaging)
- Dimensions (wxhxd cm): (excl. connections) 76.8 x 58.2 x 50.5

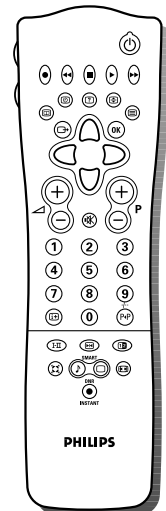

RC 25xx

(drawing not correct at date of printing)

Release date : August 1999
Predecessor(s) : 29PT9413
Date of issue : December 1998

Subject to modification without notice

Let's make things better.



PHILIPS


Product highlights

- **50Hz Contrast Plus**
- **CrystalClear III with Dynamic Contrast and Scavem**, offers a crisp and natural picture
- **Dolby Pro logic surround**
For lifelike sound experience, including 3D surround
- **NEXTVIEW Program Guide (type 2)**
Direct access of program info of selected channel and direct program category selection
- **440 Pages EasyText teletext (level 2.5)**
- **Active Control**
Auto Digital Noise Reduction, Auto Sharpness, Auto Color, Auto contrast and Smart Controls. Automatically offers the best picture setting.
- **Improved Graphical User interface**
Easy menu control of all functions
- **Full digital sound processing**

Supporting Features

- Blackline-S Ultra Flat picture tube
- Colour Transient Improvement (CTI)
- EasyTune (auto store, ACI and ATS)
- EasyLink + Nextviewlink
- Low power standby
- 110W music output incl surround
- Integrated centre speaker
- Dynamic Bass Enhancement
- 3 Loudspeakers + 2 surround
- Independent headphone volume control

Surround sound modes

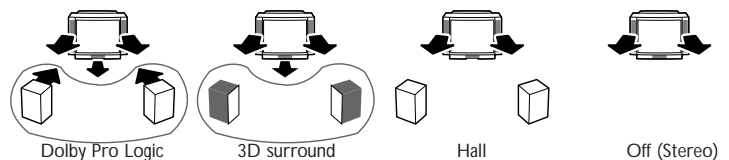

Technical specifications

Chassis

- Type: FL8a MG

Picture

- Screen diameter: 29"/72cm
- Visible screen size: 68cm
- Picture tube: Blackline-S Ultra Flat 4:3
- Image stability: 50Hz
- S-Video display
- Smart Picture control (5 modes)
 - Soft, Natural, Rich, Multi media, Personal
- Brightness, contrast, tint, sharpness, colour control

Sound

- Sound system: 4 speaker HiFi stereo
- Output (total): 110W music output
- NICAM stereo
- Frequency response:
 - 20Hz-15kHz, +1/-3dB (ampl.)
- Loudspeakers:
 - 2 x Main 2x6"
 - 1x centre speaker 2x6"
- Smart Sound control
 - Movie, Speech, Music, Multimedia, Personal
- 5 band graphic equaliser
- Surround sound speakers packed by

Operation

- Easy Easymenu driven installation and operation. Direct acces menu's and cursor control
- Selection of 18 menu languages
- 100 preselections
- Multi-function RC handset controlling
 - TV, VCR, Sat, DVD

- On screen status display on programmes and functions (OSD)
- Sleep timer up to 180 minutes
- Electronic lock for parental control
- Favourite programme selection
- Programme title display (transmitted by TXT)
- On screen menu display:
 - Picture menu, Sound menu, Features menu, Dolby menu, Program list, Set-up menu, Installation menu, Program name giving, Language and country selection
- Dealer message and demo modes
- Dealer Link: wireless communication for installation and service

Reception

- Tuning system: 100 fold PLL
- Colour transmission systems
 - Off-air: /05, /19, /12, /58
 - PAL B/G/I + SECAM B/G/L/L'
 - SECAM D/K
- A/V connections:
 - PAL B/G
 - PAL I (UK only)
 - SECAM B/G
 - NTSC video play back
- Channel selections: 120 channels
 - VHF, UHF, S-Channels, Hyperband
- Frequency range: (47.25-855.25MHz)
- Aerial input: 75 Ohm (Coax)
- VCR preselections: 0: 50-99
- Frequency / Channel selection (Germany, Austria and Benelux only)

Teletext

- EasyText teletext (level 2.5): fast access to preferred pages and subcode page scroll
- Recept. standards: WST / TOP / FLOF
- Page memory: 440 pages A.I. used for
 - Habit watch, preferred page and subcode page lists
 - favorite pages
- Program independent subtitles

Remote Control


- RC type: RC 25xx
- Cursorcontrol

Connections

- Front
 - S-Video in
 - video CVBS-in (cinch)
 - audio L/R-in (cinch) with automatic mono switching
 - headphone jack 3.5mm
- Rear
 - Euro A/V connector (RGB-in; CVBS-in/out) with auto image format detection
 - Euro A/V connector (RGB-in; Y/C-in/out; CVBS-in/out) with WYSIWYR select and image format detection
 - Euro A/V connector (CVBS-in)
 - 2 audio-out (cinch)
 - Constant/Variable level
 - surround sound out (cinch)
 - surround sound out (clickfits 4x)

Miscellaneous

- Ambient temperature : +5/+45°C
- Mains : AC 220-240V ± 10%
- Power consumption:
 - <115W; Stand by: 0,3W
- Weight: 39.5 kg (excl. packaging)
- Dimensions (wxhxd cm): (excl. connections) 76.8 x 58.2 x 50.5

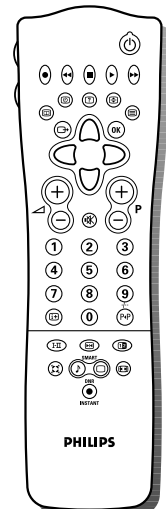

RC 25xx

(drawing not correct at date of printing)

Release date : August 1999
Predecessor(s) : 29PT9413
Date of issue : December 1998

Subject to modification without notice


Product highlights

- **50Hz Contrast Plus**
- **CrystalClear III with Dynamic Contrast and Scavem**, offers a crisp and natural picture
- **Dolby Pro logic surround**
For lifelike sound experience, including 3D surround
- **NEXTVIEW Program Guide** (type 2)
Direct access of program info of selected channel and direct program category selection
- **440 Pages EasyText teletext** (level 2.5)
- **Active Control**
Auto Digital Noise Reduction, Auto Sharpness, Auto Color, Auto contrast and Smart Controls.
Automatically offers the best picture setting.
- **Improved Graphical User interface**
Easy menu control of all functions
- **Full digital sound processing**

Supporting Features

- Blackline-S Ultra Flat picture tube
- Colour Transient Improvement (CTI)
- EasyTune (auto store, ACI and ATS)
- EasyLink + Nextviewlink
- Low power standby
- 110W music output incl surround
- Integrated centre speaker
- Dynamic Bass Enhancement
- 3 Loudspeakers + 2 surround
- Independent headphone volume control

Surround sound modes

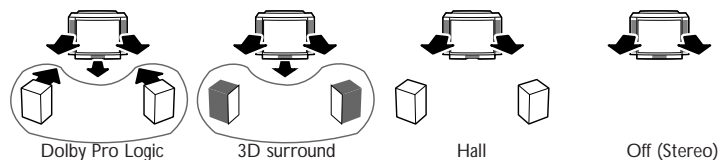

Technical specifications

Chassis

- Type: FL8a MG

Picture

- Screen diameter: 29"/72cm
- Visible screen size: 68cm
- Picture tube: Blackline-S Ultra Flat 4:3
- Image stability: 50Hz
- S-Video display
- Smart Picture control (5 modes)
 - Soft, Natural, Rich, Multi media, Personal
- Brightness, contrast, tint, sharpness, colour control

Sound

- Sound system: 4 speaker HiFi stereo
- Output (total): 110W music output
- NICAM stereo
- Frequency response:
 - 20Hz-15kHz, +1/-3dB (ampl.)
- Loudspeakers:
 - 2 x Main 2x6"
 - 1x centre speaker 2x6"
- Smart Sound control
 - Movie, Speech, Music, Multimedia, Personal
- 5 band graphic equaliser
- Surround sound speakers packed by

Operation

- Easy Easymenu driven installation and operation. Direct acces menu's and cursor control
- Selection of 18 menu languages
- 100 preselections
- Multi-function RC handset controlling
 - TV, VCR, Sat, DVD

- On screen status display on programmes and functions (OSD)
- Sleep timer up to 180 minutes
- Electronic lock for parental control
- Favourite programme selection
- Programme title display (transmitted by TXT)
- On screen menu display:
 - Picture menu, Sound menu, Features menu, Dolby menu, Program list, Set-up menu, Installation menu, Program name giving, Language and country selection
- Dealer message and demo modes
- Dealer Link: wireless communication for installation and service

Reception

- Tuning system: 100 fold PLL
- Colour transmission systems
Off-air:
 - /05, /19, /12, /58
 - PAL B/G/I +
 - SECAM B/G/L/L'
 - SECAM D/K
- A/V connections:
 - PAL B/G
 - PAL I (UK only)
 - SECAM B/G
 - NTSC video play back
- Channel selections: 120 channels
VHF, UHF, S-Channels, Hyperband
- Frequency range: (47.25-855.25MHz)
- Aerial input: 75 Ohm (Coax)
- VCR preselections: 0: 50-99
- Frequency / Channel selection
(Germany, Austria and Benelux only)

Teletext

- EasyText teletext (level 2.5): fast access to preferred pages and subcode page scroll
- Recept. standards: WST / TOP / FLOF
- Page memory: 440 pages A.I. used for
 - Habit watch, preferred page and subcode page lists
 - favorite pages
- Program independent subtitles

Remote Control


- RC type: RC 25xx
- Cursorcontrol

Connections

- Front
 - S-Video in
 - video CVBS-in (cinch)
 - audio L/R-in (cinch) with automatic mono switching
 - headphone jack 3.5mm
- Rear
 - Euro A/V connector (RGB-in; CVBS-in/out) with auto image format detection
 - Euro A/V connector (RGB-in; Y/C-in/out; CVBS-in/out) with WYSIWYR select and image format detection
 - Euro A/V connector (CVBS-in)
 - 2 audio-out (cinch)
 - Constant/Variable level
 - surround sound out (cinch)
 - surround sound out (clickfits 4x)

Miscellaneous

- Ambient temperature : +5/+45°C
- Mains : AC 220-240V ± 10%
- Power consumption:
 - <115W; Stand by: 0,3W
- Weight: 39.5 kg (excl. packaging)
- Dimensions (wxhxd cm):
(excl. connections) 76.8 x 58.2 x 50.5

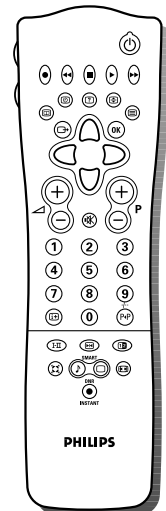

RC 25xx

(drawing not correct at date of printing)

Release date : August 1999
Predecessor(s) : 29PT9413
Date of issue : December 1998

Subject to modification without notice


Product highlights

- **50Hz Contrast Plus**
- **CrystalClear III with Dynamic Contrast and Scavem**, offers a crisp and natural picture
- **Dolby Pro logic surround**
For lifelike sound experience, including 3D surround
- **NEXTVIEW Program Guide** (type 2)
Direct access of program info of selected channel and direct program category selection
- **440 Pages EasyText teletext** (level 2.5)
- **Active Control**
Auto Digital Noise Reduction, Auto Sharpness, Auto Color, Auto contrast and Smart Controls.
Automatically offers the best picture setting.
- **Improved Graphical User interface**
Easy menu control of all functions
- **Full digital sound processing**

Supporting Features

- Blackline-S Ultra Flat picture tube
- Colour Transient Improvement (CTI)
- EasyTune (auto store, ACI and ATS)
- EasyLink + Nextviewlink
- Low power standby
- 110W music output incl surround
- Integrated centre speaker
- Dynamic Bass Enhancement
- 3 Loudspeakers + 2 surround
- Independent headphone volume control

Surround sound modes

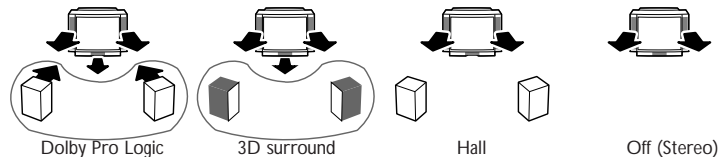

Technical specifications

Chassis

- Type: FL8a MG

Picture

- Screen diameter: 29"/72cm
- Visible screen size: 68cm
- Picture tube: Blackline-S Ultra Flat 4:3
- Image stability: 50Hz
- S-Video display
- Smart Picture control (5 modes)
 - Soft, Natural, Rich, Multi media, Personal
- Brightness, contrast, tint, sharpness, colour control

Sound

- Sound system: 4 speaker HiFi stereo
- Output (total): 110W music output
- NICAM stereo
- Frequency response:
 - 20Hz-15kHz, +1/-3dB (ampl.)
- Loudspeakers:
 - 2 x Main 2x6"
 - 1x centre speaker 2x6"
- Smart Sound control
 - Movie, Speech, Music, Multimedia, Personal
- 5 band graphic equaliser
- Surround sound speakers packed by

Operation

- Easy Easymenu driven installation and operation. Direct acces menu's and cursor control
- Selection of 18 menu languages
- 100 preselections
- Multi-function RC handset controlling
 - TV, VCR, Sat, DVD

- On screen status display on programmes and functions (OSD)
- Sleep timer up to 180 minutes
- Electronic lock for parental control
- Favourite programme selection
- Programme title display (transmitted by TXT)
- On screen menu display:
 - Picture menu, Sound menu, Features menu, Dolby menu, Program list, Set-up menu, Installation menu, Program name giving, Language and country selection
- Dealer message and demo modes
- Dealer Link: wireless communication for installation and service

Reception

- Tuning system: 100 fold PLL
- Colour transmission systems
Off-air:
 - /05, /19, /12, /58
 - PAL B/G/I +
 - SECAM B/G/L/L'
 - SECAM D/K
- A/V connections:
 - PAL B/G
 - PAL I (UK only)
 - SECAM B/G
 - NTSC video play back
- Channel selections: 120 channels
VHF, UHF, S-Channels, Hyperband
- Frequency range: (47.25-855.25MHz)
- Aerial input: 75 Ohm (Coax)
- VCR preselections: 0: 50-99
- Frequency / Channel selection
(Germany, Austria and Benelux only)

Teletext

- EasyText teletext (level 2.5): fast access to preferred pages and subcode page scroll
- Recept. standards: WST / TOP / FLOF
- Page memory: 440 pages A.I. used for
 - Habit watch, preferred page and subcode page lists
 - favorite pages
- Program independent subtitles

Remote Control


- RC type: RC 25xx
- Cursorcontrol

Connections

- Front
 - S-Video in
 - video CVBS-in (cinch)
 - audio L/R-in (cinch) with automatic mono switching
 - headphone jack 3.5mm
- Rear
 - Euro A/V connector (RGB-in; CVBS-in/out) with auto image format detection
 - Euro A/V connector (RGB-in; Y/C-in/out; CVBS-in/out) with WYSIWYR select and image format detection
 - Euro A/V connector (CVBS-in)
 - 2 audio-out (cinch)
 - Constant/Variable level
 - surround sound out (cinch)
 - surround sound out (clickfits 4x)

Miscellaneous

- Ambient temperature : +5/+45°C
- Mains : AC 220-240V ± 10%
- Power consumption:
 - <115W; Stand by: 0,3W
- Weight: 39.5 kg (excl. packaging)
- Dimensions (wxhxd cm):
(excl. connections) 76.8 x 58.2 x 50.5

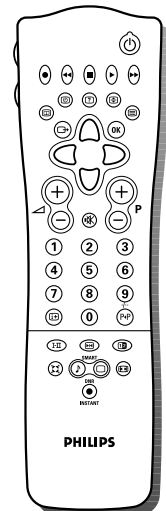

RC 25xx

(drawing not correct at date of printing)

Release date : August 1999
Predecessor(s) : 29PT9413
Date of issue : December 1998

Subject to modification without notice


Product highlights

- **50Hz Contrast Plus**
- **CrystalClear III with Dynamic Contrast and Scavem**, offers a crisp and natural picture
- **Dolby Pro logic surround**
For lifelike sound experience, including 3D surround
- **NEXTVIEW Program Guide (type 2)**
Direct access of program info of selected channel and direct program category selection
- **440 Pages EasyText teletext (level 2.5)**
- **Active Control**
Auto Digital Noise Reduction, Auto Sharpness, Auto Color, Auto contrast and Smart Controls. Automatically offers the best picture setting.
- **Improved Graphical User interface**
Easy menu control of all functions
- **Full digital sound processing**

Supporting Features

- Blackline-S Ultra Flat picture tube
- Colour Transient Improvement (CTI)
- EasyTune (auto store, ACI and ATS)
- EasyLink + Nextviewlink
- Low power standby
- 110W music output incl surround
- Integrated centre speaker
- Dynamic Bass Enhancement
- 3 Loudspeakers + 2 surround
- Independent headphone volume control

Surround sound modes

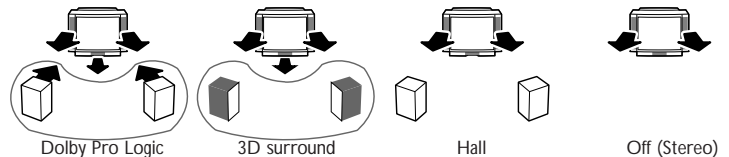

Technical specifications

Chassis

- Type: FL8a MG

Picture

- Screen diameter: 29"/72cm
- Visible screen size: 68cm
- Picture tube: Blackline-S Ultra Flat 4:3
- Image stability: 50Hz
- S-Video display
- Smart Picture control (5 modes)
 - Soft, Natural, Rich, Multi media, Personal
- Brightness, contrast, tint, sharpness, colour control

Sound

- Sound system: 4 speaker HiFi stereo
- Output (total): 110W music output
- NICAM stereo
- Frequency response:
 - 20Hz-15kHz, +1/-3dB (ampl.)
- Loudspeakers:
 - 2 x Main 2x6"
 - 1x centre speaker 2x6"
- Smart Sound control
 - Movie, Speech, Music, Multimedia, Personal
- 5 band graphic equaliser
- Surround sound speakers packed by

Operation

- Easy Easymenu driven installation and operation. Direct acces menu's and cursor control
- Selection of 18 menu languages
- 100 preselections
- Multi-function RC handset controlling
 - TV, VCR, Sat, DVD

- On screen status display on programmes and functions (OSD)
- Sleptimer up to 180 minutes
- Electronic lock for parental control
- Favourite programme selection
- Programme title display (transmitted by TXT)
- On screen menu display:
 - Picture menu, Sound menu, Features menu, Dolby menu, Program list, Set-up menu, Installation menu, Program name giving, Language and country selection
- Dealer message and demo modes
- Dealer Link: wireless communication for installation and service

Reception

- Tuning system: 100 fold PLL
- Colour transmission systems
 - Off-air: /05, /19, /12, /58
 - PAL B/G/I + SECAM B/G/L/L'
 - SECAM D/K
- A/V connections:
 - PAL B/G
 - PAL I (UK only)
 - SECAM B/G
 - NTSC video play back
- Channel selections: 120 channels
 - VHF, UHF, S-Channels, Hyperband
- Frequency range: (47.25-855.25MHz)
- Aerial input: 75 Ohm (Coax)
- VCR preselections: 0: 50-99
- Frequency / Channel selection (Germany, Austria and Benelux only)

Teletext

- EasyText teletext (level 2.5): fast access to preferred pages and subcode page scroll
- Recept. standards: WST / TOP / FLOF
- Page memory: 440 pages A.I. used for
 - Habit watch, preferred page and subcode page lists
 - favorite pages
- Program independent subtitles

Remote Control


- RC type: RC 25xx
- Cursorcontrol

Connections

- Front
 - S-Video in
 - video CVBS-in (cinch)
 - audio L/R-in (cinch) with automatic mono switching
 - headphone jack 3.5mm
- Rear
 - Euro A/V connector (RGB-in; CVBS-in/out) with auto image format detection
 - Euro A/V connector (RGB-in; Y/C-in/out; CVBS-in/out) with WYSIWYR select and image format detection
 - Euro A/V connector (CVBS-in)
 - 2 audio-out (cinch)
 - Constant/Variable level
 - surround sound out (cinch)
 - surround sound out (clickfits 4x)

Miscellaneous

- Ambient temperature : +5/+45°C
- Mains : AC 220-240V ± 10%
- Power consumption:
 - <115W; Stand by: 0,3W
- Weight: 39.5 kg (excl. packaging)
- Dimensions (wxhxd cm): (excl. connections) 76.8 x 58.2 x 50.5

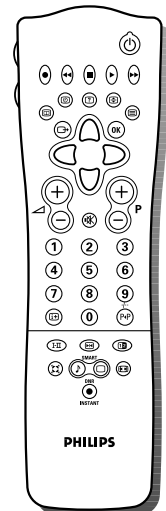

RC 25xx

(drawing not correct at date of printing)

Release date : August 1999
Predecessor(s) : 29PT9413
Date of issue : December 1998

Subject to modification without notice


Product highlights

- **50Hz Contrast Plus**
- **CrystalClear III with Dynamic Contrast and Scavem**, offers a crisp and natural picture
- **Dolby Pro logic surround**
For lifelike sound experience, including 3D surround
- **NEXTVIEW Program Guide** (type 2)
Direct access of program info of selected channel and direct program category selection
- **440 Pages EasyText teletext** (level 2.5)
- **Active Control**
Auto Digital Noise Reduction, Auto Sharpness, Auto Color, Auto contrast and Smart Controls.
Automatically offers the best picture setting.
- **Improved Graphical User interface**
Easy menu control of all functions
- **Full digital sound processing**

Supporting Features

- Blackline-S Ultra Flat picture tube
- Colour Transient Improvement (CTI)
- EasyTune (auto store, ACI and ATS)
- EasyLink + Nextviewlink
- Low power standby
- 110W music output incl surround
- Integrated centre speaker
- Dynamic Bass Enhancement
- 3 Loudspeakers + 2 surround
- Independent headphone volume control

Surround sound modes

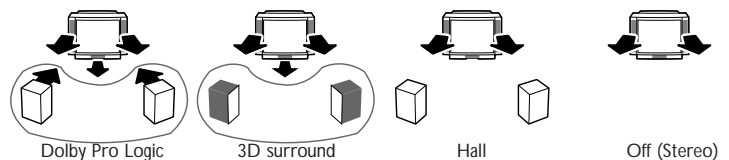

Technical specifications

Chassis

- Type: FL8a MG

Picture

- Screen diameter: 29"/72cm
- Visible screen size: 68cm
- Picture tube: Blackline-S Ultra Flat 4:3
- Image stability: 50Hz
- S-Video display
- Smart Picture control (5 modes)
 - Soft, Natural, Rich, Multi media, Personal
- Brightness, contrast, tint, sharpness, colour control

Sound

- Sound system: 4 speaker HiFi stereo
- Output (total): 110W music output
- NICAM stereo
- Frequency response:
 - 20Hz-15kHz, +1/-3dB (ampl.)
- Loudspeakers:
 - 2 x Main 2x6"
 - 1x centre speaker 2x6"
- Smart Sound control
 - Movie, Speech, Music, Multimedia, Personal
- 5 band graphic equaliser
- Surround sound speakers packed by

Operation

- Easy Easymenu driven installation and operation. Direct acces menu's and cursor control
- Selection of 18 menu languages
- 100 preselections
- Multi-function RC handset controlling
 - TV, VCR, Sat, DVD

- On screen status display on programmes and functions (OSD)
- Sleep timer up to 180 minutes
- Electronic lock for parental control
- Favourite programme selection
- Programme title display (transmitted by TXT)
- On screen menu display:
 - Picture menu, Sound menu, Features menu, Dolby menu, Program list, Set-up menu, Installation menu, Program name giving, Language and country selection
- Dealer message and demo modes
- Dealer Link: wireless communication for installation and service

Reception

- Tuning system: 100 fold PLL
- Colour transmission systems
Off-air:
 - /05, /19, /12, /58
 - PAL B/G/I +
 - SECAM B/G/L/L'
 - SECAM D/K
- A/V connections:
 - PAL B/G
 - PAL I (UK only)
 - SECAM B/G
 - NTSC video play back
- Channel selections: 120 channels
VHF, UHF, S-Channels, Hyperband
- Frequency range: (47.25-855.25MHz)
- Aerial input: 75 Ohm (Coax)
- VCR preselections: 0: 50-99
- Frequency / Channel selection
(Germany, Austria and Benelux only)

Teletext

- EasyText teletext (level 2.5): fast access to preferred pages and subcode page scroll
- Recept. standards: WST / TOP / FLOF
- Page memory: 440 pages A.I. used for
 - Habit watch, preferred page and subcode page lists
 - favorite pages
- Program independent subtitles

Remote Control


- RC type: RC 25xx
- Cursorcontrol

Connections

- Front
 - S-Video in
 - video CVBS-in (cinch)
 - audio L/R-in (cinch) with automatic mono switching
 - headphone jack 3.5mm
- Rear
 - Euro A/V connector (RGB-in; CVBS-in/out) with auto image format detection
 - Euro A/V connector (RGB-in; Y/C-in/out; CVBS-in/out) with WYSIWYR select and image format detection
 - Euro A/V connector (CVBS-in)
 - 2 audio-out (cinch)
 - Constant/Variable level
 - surround sound out (cinch)
 - surround sound out (clickfits 4x)

Miscellaneous

- Ambient temperature : +5/+45°C
- Mains : AC 220-240V ± 10%
- Power consumption:
 - <115W; Stand by: 0,3W
- Weight: 39.5 kg (excl. packaging)
- Dimensions (wxhxd cm):
(excl. connections) 76.8 x 58.2 x 50.5

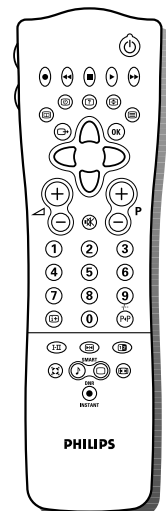

RC 25xx

(drawing not correct at date of printing)

Release date : August 1999
Predecessor(s) : 29PT9413
Date of issue : December 1998

Subject to modification without notice