



Washer extractor W5105S

Features and benefits

- **Compass Pro® microprocessor offers:**
 - Large display and one control knob for easy program selection
 - Language selection
 - Quick selection and option buttons for the most frequently used wash programs and options
 - Wash program packages optimized on *Economy, Performance and Time*. (Available on general programs)
- **AS – Automatic Savings:**
 - The machine weighs the linen and adjusts the amount of water and energy according to the load. This leads to considerable savings in case the machine is not fully loaded. (Available on general programs)
- Extremely low water and energy consumption – see table below
- Four compartment detergent box for manual dosing of powder or liquid detergent
- High extraction force for efficient dewatering
- Door with gasket and strong hinges built for heavy duty operation
- Stainless and galvanized steel in all vital parts for high degree of rust protection
- SuperBalance guarantees the correct extraction force



Images shown are a representation of the product only and variations may occur.

Main options

- Automatic liquid detergent supply (optional I/O board)
- Stainless steel front panel
- Connection to booking- /payment- system or coin meter
- Drain pump

Main specifications				W5105S			
Max. capacity	filling factor 1:9	kg/lb		11/25			
Drum,	volume	litre		105			
	diameter	ø mm		595			
Extraction		rpm		776			
G-factor				200			
Standard heating alternatives		electricity	kW	7.5 / 10.0			
Low energy heating alternatives		electricity	kW	3.0			
		steam		x			
		non-heated		x			
Consumption data "Normal 60°C"				EI		Steam***	
Economy*				Full load, 11 kg	Half load**, 5.5 kg	Full load, 11 kg	Half load**, 5.5 kg
Total time		min		48	45	48	45
Water consumption (cold+hot)		litre		67+19	38+10	86+0	48+0
Energy consumption (motor/heating/hot water)		kWh		0.15/0.55/1.2	0.15/0.3/0.65	0.15/-	0.15/-
Steam consumption		kg		-	-	2.6	1.4
Residual moisture		%		58	66	58	66

* Water temperature 15°C cold water and 65°C hot water.


** Programs with AS.

*** Depending on steam pressure.




Electrical connections*					
Heating alternative	Main voltage		Heating power kW	Total power kW	Recommended fuse A
	Hz				
Electric heated	220-240V 1 ~	50/60	3.0/7.5/10.0	3.3/7.8/10.3	20/35/50
	220-240V 3 ~	50/60	7.5/10.0	7.8/10.3	25/35
	380-415V 3N ~	50/60	7.5/10.0	7.8/10.3	16/20
	440V 3 ~	60	7.5/10.0	7.8/10.3	16
	480V 3 ~	60	7.5/10.0	7.8/10.3	16
Steam or Non heated	220-480V 1/3 ~	50/60	-	0.8	10


Water and steam connection		W5105S	
Water valves	DN	20	
Water pressure	kPa	200-600	
Capacity at 300 kPa	l/min	20	
Drain valve	ø mm	75	
Draining capacity	l/min	170	
Steam valve	DN	15	
Steam pressure	kPa	300-600	
Liquid detergent supplies		5	
Floor requirements			
Frequency of the dynamic force	Hz	12.9	
Floor load at max extraction	kN	1.9 ± 3.0	
Sound levels			
Sound power level (IEC 60704-2-4)			
wash	dB(A)	63	
extraction	dB(A)	71	
Heat emission			
% of installed power, max		5	
Shipping data			
Weight	net, kg	145	
	crated, kg	167	
Shipping volume	m ³	0.9	
Accessories			
Steel base		x	
Hose kits for water or steam		x	
Fluff collector		x	
Dimensions in mm			
A	Width	720	
B	Depth	1187	
C	Height	1217	
D		424	
E		697	
F		920	
G		80	
H		1119	
I		224	
J		124	
K		1099	
L		999	
M		278	
N		105	
O		212	
1	Operating panel	7	Drain
2	Door opening ø 365 mm	8	Liquid detergent supply
3	Detergent box	9	Electrical connection
4	Cold water	10	Steam connection
5	Hot water	11	Third water valve
6	Re-used water		

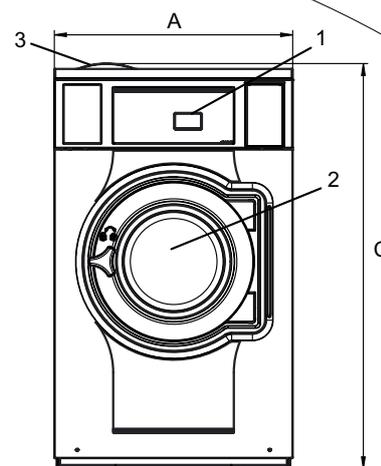

Front

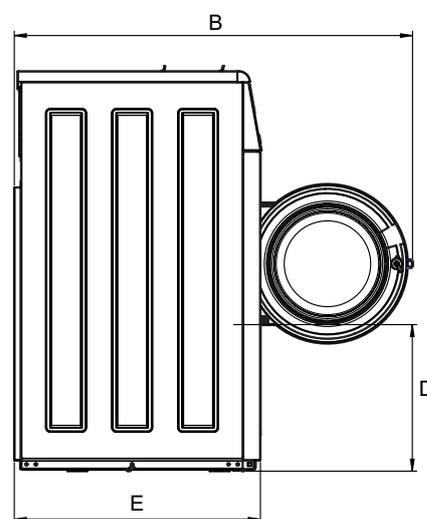

Side view

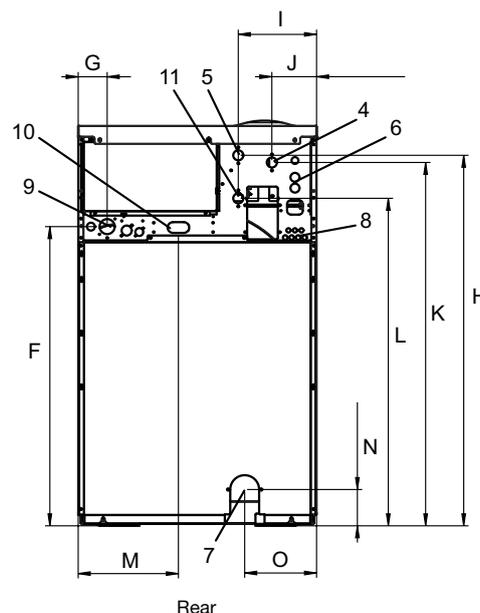

Rear

Front and side panels in light grey and blue (RAL 260 70 05, 250 60 30)

* Other voltages available, see installation manual