

LASER MFC

FLATBED

MULTI-FUNCTION CENTER®

FAX • LASER PRINTER • DIGITAL COPIER • COLOR SCANNER • PC FAX

MFC-9800



UP TO
FAST 15
PPM
PRINTING
& COPYING

SUPER G3
33.6K bps High-Speed
FAX

WORKS WITH
WINDOWS®
iMac™/G3
iBook™/G4


At your side.™

brother®

LASER MFC

FLATBED MULTI-FUNCTION CENTER

MFC-9800

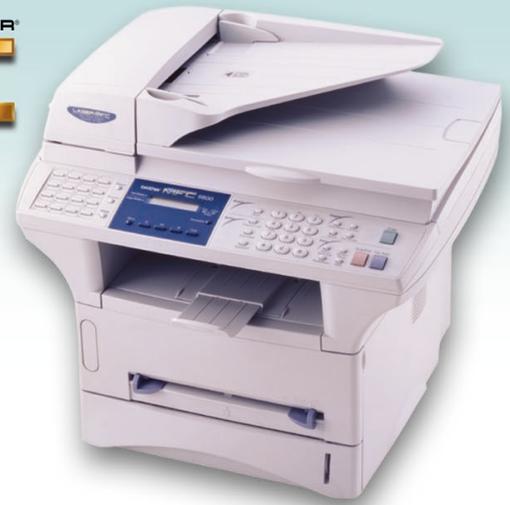


FAX FEATURES

- 50 Page Auto Document Feeder
- Super Quick Scan – up to 2 seconds per page*
- 33.6K bps High-Speed Fax Modem
- 132 Station Auto Dialing
- 8MB Total Memory (up to 600 pages*)
- Broadcasting (up to 182 locations)
- Dual Access lets you scan a fax into memory while another is being received
- Simultaneous Operations let you perform two functions at once

LASER PRINTER FEATURES

- Up to 15 pages per minute Printing
- True 600 x 600 dpi Laser Output
- Parallel and USB Interfaces Standard (Parallel Cable Included)
- 250 Sheet Paper Cassette Capacity (Optional 2nd 250 Sheet Cassette available†)
- Works with Windows®, DOS, (PCL5e) and iMac™/iBook™/G3/G4 applications (see minimum system requirements below)



DIGITAL COPIER FEATURES

- Versatile Flatbed Design for copying from bound documents
- Up to 15 cpm Copy Speed
- 600 dpi Copy Output
- No PC required
- Multi-Copying, up to 99, with Sorting
- Reduce or enlarge from 25% to 400% in one percent increments

COLOR SCANNER FEATURES

- Flatbed Design for scanning from bound documents
- Color or Black & White Scanning
- Up to 9600 x 9600 dpi (Interpolated) Resolution and up to 600 x 2400 dpi (Optical) Resolution
- Easy to use Desktop interface with “Drag and Drop” Filing and Linking
- Includes award-winning ScanSoft™ PaperPort® and TextBridge® OCR software

PC FAX FEATURES

- Includes Brother PC Fax software for sending or receiving faxes from your PC
- Broadcast faxes via your PC
- Works with Windows® and iMac™/iBook™/G3/G4

MFC-9800 Optional Supplies & Accessories†

TN-430:	Standard Toner Cartridge 3,000 pages per cartridge*
TN-460:	High Yield Toner Cartridge 6,000 pages per cartridge*
DR-400:	Drum Unit
LT-400:	Second Paper Cassette (Holds an additional 250 Pages)
NC-8100h	Network (LAN) Board

† Requires additional purchase

* Based on 5% page coverage

* Based on Brother #1 Chart with MMR coding and standard resolution

Minimum System Requirements

Computer Platform & Operating System Version		Processor Minimum Speed	Minimum RAM	Recommended RAM	Available Hard Disk Space	CD-ROM Drive Minimum Speed
Windows® Operating Systems	95, 98, 98SE	Pentium 75MHz	24MB	32MB	50MB	2X
	Me	Pentium 150MHz	32MB	64MB	50MB	2X
	NT® Workstation 4.0	Pentium 75MHz	32MB	64MB	50MB	2X
	2000 Professional	Pentium 133MHz	64MB	128MB	50MB	2X
	XP	Pentium 233MHz	64MB	128MB	50MB	2X
Apple iMac™/iBook™/G3/G4 Operating Systems	OS 8.5, 8.5.1 (Printer Only)	All base models meet minimum requirements			50MB	2X
	OS 8.6 – 9.1 (Printer & Scanner)				50MB	2X
					50MB	2X

NOTE: USB is not supported under Windows® 95 or Windows NT® 4.0

All registered trademarks referenced herein are the property of their respective companies.

PRODUCT SPECIFICATIONS

Approved:	FCC & UL
Unit Dimensions:	19.4" x 18.0" x 16.9"
Carton Dimensions:	23.5" x 22.3" x 22.8"
Unit/Carton Weight:	33.0 lbs/46.3 lbs
UPC Code:	0 12502 60061 9
Printing Method/Speed:	Electrophotography/15PPM
Compatibility:	ITU Group 3
Coding Method:	MH/MR/MMR/JBIG
Modulation:	33600/31200/28800/26400/24000/ 21600/19200/16800/14400/ 12000/9600/7200/4800/2400 bps
Transmission Time:	Approx. 2 seconds per page (ITU #1 chart, JBIG)
Total Machine Memory:	8MB
Document Input Width:	5.8" to 8.5"
Recording Paper Size:	8.5" x 11"/8.5" x 14"
Paper Type for Manual Pass:	Letter, Legal, A4, B5, Executive, Envelopes, Transparencies, Laser label sheets, Custom Size 2.75" x 5" to 8.5" x 14"
Scanning & Recording Width:	8.2"
Printer Resolution:	True 600 x 600 dpi
Fax Resolution: Standard:	203 x 98 lines/inch
Fine:	203 x 196 lines/inch
Superfine:	203 x 392 lines/inch
Gray Scale:	64 shades
Speaker Type:	Monitor
Interfaces (standard):	High-Speed Bi-Directional Centronics Parallel (IEEE 1284 cable included) & USB interfaces (USB cable not included)
Emulations:	Brother Printing Solution for Windows® or iMac™/iBook™/G3/G4, PCL5e
Utility Software:	Windows® 95/98/98SE, Me, NT® Workstation 4.0, 2000 Professional, XP, or iMac™/iBook™/G3/G4, OS 8.5-9/1*
Power Supply:	120V, 50/60Hz
Power Consumption: Operating (Copying):	850W or less
Standby:	60W or less
Sleep Mode:	9W or less
Noise Level:	53 dbA (printing) 30 dbA (standby)
Operating Environment:	50° to 90.5° (F)

* OS 8.5.5.1 support printing only.

At your side.™
brother®
www.brother.com

© 2001 BROTHER INTERNATIONAL CORPORATION

100 Somerset Corporate Blvd., Bridgewater, NJ 08807-0911

For more information please call the Brother Fax-Back System at 1-800-521-2846 (USA),

1-800-681-9838 (Canada), or visit our web site at www.brother.com

All specifications are subject to change without notice. Printed in USA. CATMFC9800