

# ELKAY® SPECIFICATIONS

## No Lead SwirlFlo® Countertop Drinking Fountain Model DRKR14C

### GENERAL

Countertop mounted drinking fountain constructed of #18 gauge, type 304 stainless steel polished to a lustrous satin finish.

Contoured basin minimizes splashing and is furnished with chrome plated brass push button bubbler complete with in-line flow regulator providing a constant stream height at 20 to 105 P.S.I.

Fountain securely mounts to countertop with bracket provided. Meets all known sanitary codes.

### NO LEAD DESIGN

**THIS DRINKING FOUNTAIN COMPLIES WITH THE LEAD-FREE DEFINITION IN THE SAFE DRINKING WATER ACT OF 1986 AND LEAD CONTAMINATION CONTROL ACT OF 1988.**


LK142 Bubbler is constructed of completely lead-free material.




This drinking fountain is classified by Underwriters Laboratories Inc. in accordance with **ANSI/NSF61, Section 9-1997b.**

### CONSTRUCTION

Model DRKR14C countertop type drinking fountain furnished complete with LK142 bubbler.

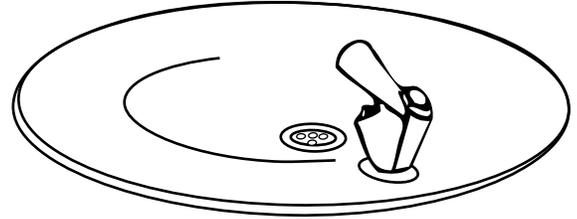

Model DRKR14C

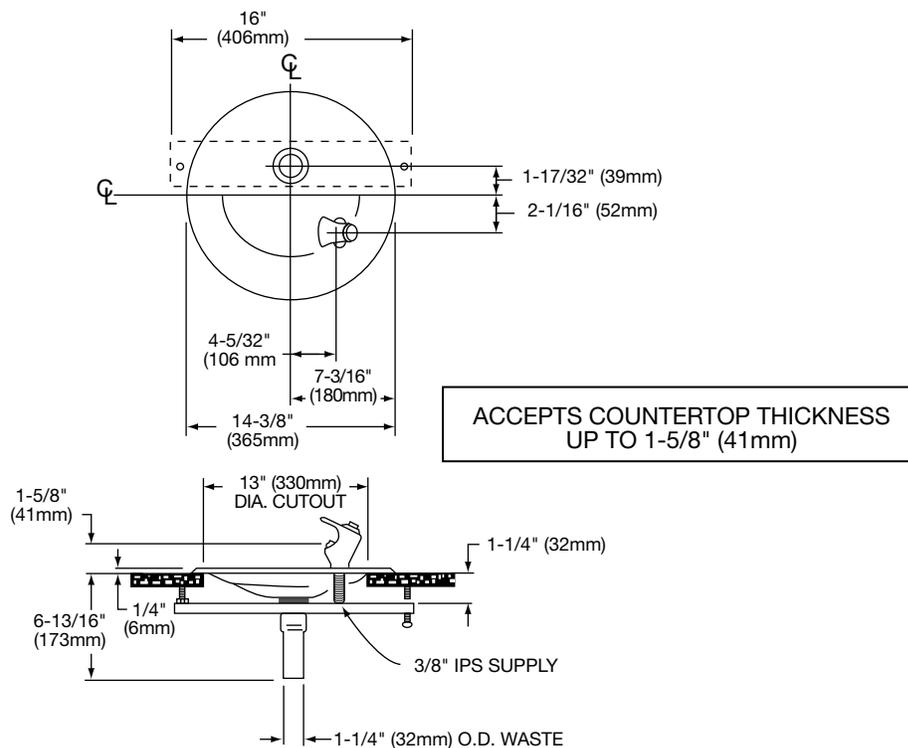


**No Lead SwirlFlo® Countertop  
Drinking Fountain  
Model DRKR14C**

**ELKAY®  
PARTS LIST**


**INSTALLER NOTE**

THIS DRINKING FOUNTAIN IS FURNISHED WITH A BUBBLER AND VALVE INCLUDING ALL CONNECTING FITTINGS WHICH ARE MANUFACTURED OF COMPLETELY LEAD FREE MATERIAL IT IS RECOMMENDED THAT SHUT OFF VALVE AND SUPPLY TUBING SUPPLIED BY OTHERS BE NON-METALLIC.

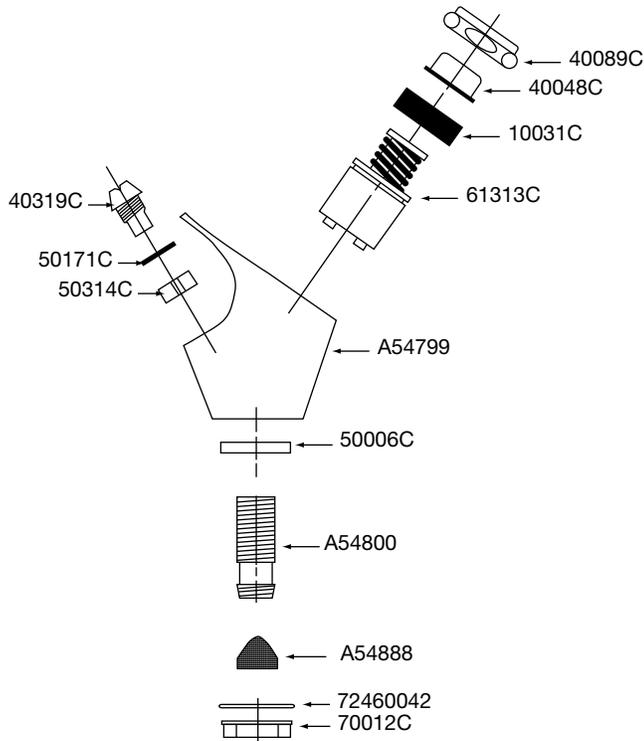


**PARTS FOR LK142 BUBBLERS**

| PART NUMBER  | PART DESCRIPTION    |
|--------------|---------------------|
| 10031C       | Retaining Nut       |
| 40048C       | Button              |
| 40089C       | Retaining Nut       |
| 40319C       | Orifice             |
| 100322740560 | Washer              |
| 50171C       | "O" Ring            |
| 50314C       | Flow Straightener   |
| A54799       | Body                |
| A54800       | Nipple              |
| A54888       | Screen              |
| 61313C       | Regulator Cartridge |
| 70012C       | Locknut             |
| 72460042     | Washer              |





MAKE 13" (330mm) DIAMETER CUTOUT IN DESIRED LOCATION ON COUNTERTOP.

INSTALL BUBBLER ASSEMBLY TO FOUNTAIN. ALIGN RECESS IN UNDERSIDE OF BUBBLER WITH DIMPLE IN FOUNTAIN.




APPLY CAULK (NOT FURNISHED) AROUND CUTOUT AND WASTE OPENING. PLACE FOUNTAIN OVER OPENING AND DROP IN STRAINER.

FROM UNDERSIDE . . . POSITION AND SECURE TIEDOWN BRACKET USING WASTE FITTING.



USE SCREWS WITH NUTS TO TIGHTEN UNIT TO COUNTERTOP. WIPE OFF EXCESS CAULKING.



**PARTS FOR DRKR14C  
DRINKING FOUNTAIN**

| ITEM NO. | NO. REQD. | PART NUMBER | PART DESCRIPTION     |
|----------|-----------|-------------|----------------------|
| 14       | 1         | 72001511    | Grid Strainer        |
| 15       | 1         | 72001514    | Strainer Body        |
| 16       | 2         | 72001513    | Rubber Washer        |
| 17       | 1         | 72001655    | Tailpiece            |
| 18       | 1         | 55000962    | Countertop Basin     |
| 19       | 1         | 55000963    | Tie Down Bracket     |
| 20       | 2         | 74080022    | 1/4-20 x 2-1/2 Screw |
| 21       | 4         | 74080005    | 1/4-20 Hex Nut       |