PDWT400/480R GE Profile™ Dishwasher with SmartDispense™ Technology

Dimensions and Installation Information (in inches)


Electrical Rating

Voltage AC	120
Hertz	60
Total connected load amperage	9.1
Calrod® heater watts max	875

For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

†† Add 1/2" for deepest part of contour door. Allow an additional 2" for the handle on PDWT500/PDWT400/PDWT200 Series models.

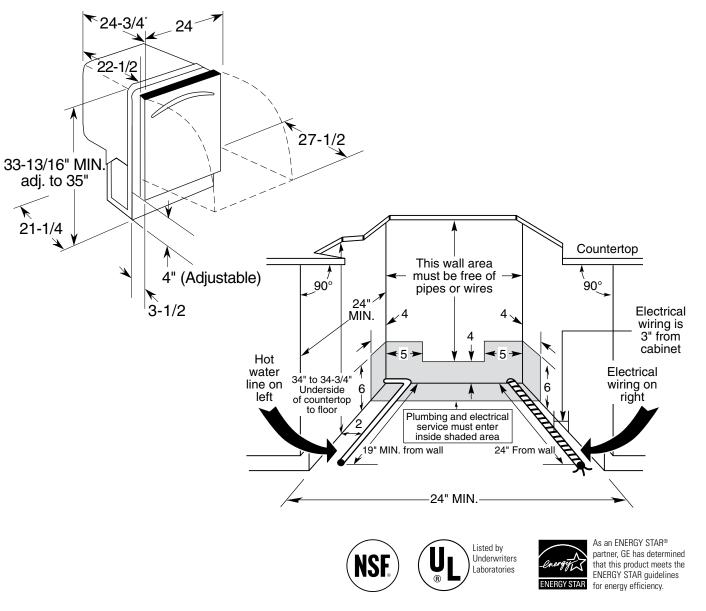

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.



PDWT400/480R GE Profile™ Dishwasher with SmartDispense™ Technology

Features and Benefits

- PureClean wash system with 5-stage filtration Multiple filtration levels ensure clean dishes
- ENERGY STAR[®] Qualified Meets or exceeds federal guidelines for energy efficiency for year-round energy and money savings
- SmartDispense[™] technology Holds up to 47 oz of detergent and dispenses it at just the right time
- DeepClean[™] cycle with Steam Prewash Steam helps to loosen tough soils, like eggs, oatmeal and rice
- Eclipse black nylon deep-tiered rack Durable racks are designed to resist rust and secure dishes
- Two utility shelves in tiered upper rack with StemSafe[™] Long-lasting shelves help organize racks and protect delicate stemware
- Electronic controls with 5 cycles/5 options Modern controls make it easy to program the dishwasher
- QuietPower™48 sound package with ActiveVent 48 dBA ActiveVent™ panel closes to keep wash sounds inside
- Model PDWT480RSS Stainless steel (shown)
- Model PDWT400RWW White on white
- Model PDWT400RBB Black on black



