


C-LINE WAREWASHING

TO OPERATE:

To Start:

- 1 Place strainer pans and scrap basket into position in dishwasher tank.
- 2 Ensure curtains are on the corresponding hooks.
- 3 Close all access doors (automatically closes drains).
- 4 Push "Power On" button (machine will begin to fill).
- 5 Once filled, push "Motor On" button.
- 6 If auto shutdown activates, restart machine by pushing a rack into dishwasher, or push "Motor On" button.

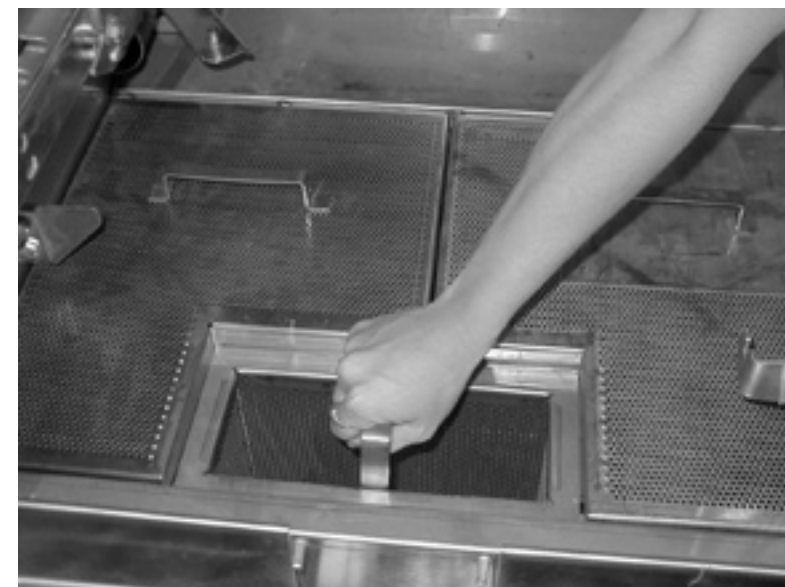

To Stop:

- 7 Push "Power Off" button.



OPERATIONAL TIPS:

- 1 DO NOT overload dishracks.
- 2 Ware should face the direction of dishrack travel. Observe recommended wash and rinse temperatures: WASH: 160°F, RINSE: 180°F minimum.

NOTE:


- For complete instructions and maintenance information, read the Instruction Manual.
- Refer to "Troubleshooting" section of your C-Line Dishwasher Instruction Manual or call your local Hobart Sales/Service office if you experience any difficulties.



701 S. Ridge Avenue, Troy, OH 45374-0001
Phone: (937) 332-3000 www.hobartcorp.com

TO CLEAN:

- 1 Push "Power Off" button.
- 2 Raise all access doors.
- 3 Lift drain lever inside door opening.
- 4 Remove curtains and clean with a warm water – mild detergent solution and a soft bristled scrub brush.
- 5 Remove wash arms, check for plugged wash arm nozzles, remove any obstructions.
- 6 Remove and clean strainer pans and scrap basket(s).
- 7 Clean the pump intake screen.
- 8 Spray down machine interior with water.
- 9 Inspect tank interiors, remove any remaining soil.
- 10 Wipe down exterior with a wet wash cloth – DO NOT SPRAY THE EXTERIOR WITH A HOSE.
- 11 Reassemble the machine:
 - Install strainer pans and scrap basket(s).
 - Install wash arms.
 - Install curtains.

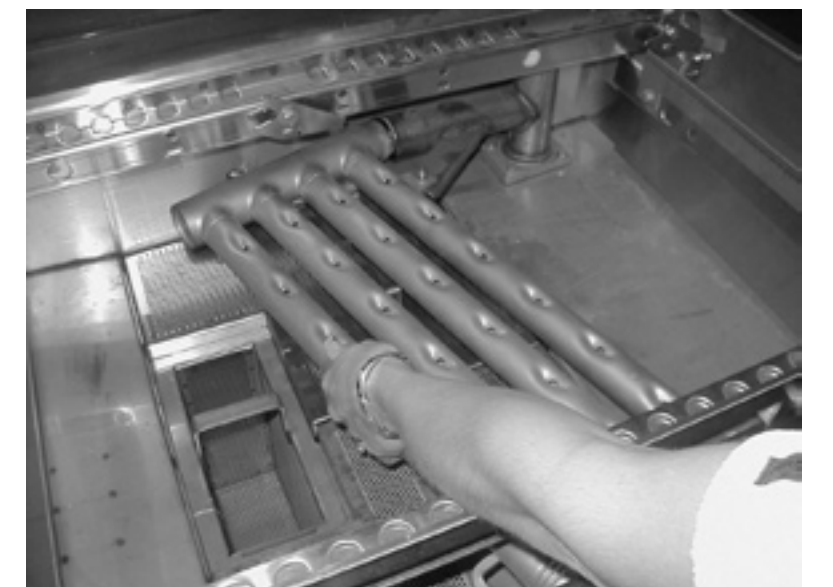

End of the Day Clean-Up:

- 1 Complete steps 1 through 10 of "To Clean."
- 2 Clean debris and water from dishtables into dishwasher.
- 3 Reassemble the machine:
 - Install strainer pans and scrap basket(s).
 - Install wash arms.
- 4 Hang curtains on corresponding hooks.
- 5 Leave doors open to air out machine interior.

