

## RANGE COMPOSITION

The range consists of a base model LB2 available in 2 versions:  
402070 - standard model  
402071 - standard model with drain pump and detergent dispenser



402070

# NGW

## GLASSWASHERS ZANUSSI PROFESSIONAL

## FUNCTIONAL AND CONSTRUCTION FEATURES




- ◆ A high standard of washing, rinsing and hygiene is achieved.
- ◆ One cycle of 120 seconds.
- ◆ Glasses, cups and crockery up to a height of 290 mm can be washed due to the ample loading height.
- ◆ 5 litre capacity boiler, washing temperature 55° to 65°C and rinse temperature 80° to 90°.
- ◆ Double-walled washing chamber and tank. Separate washing and rinsing circuits. Upper and lower rotary washing arms and rinsing arms.
- ◆ Load bearing frame, front panels, tank, washing and rinsing arms and jets in 304 AISI stainless steel.
- ◆ Frontal access to the main components: boiler elements, thermostats, timer, rinse aid dispenser and electrical components.
- ◆ One basket, 100 mm in height; electric cable and hose for water connection supplied as standard.
- ◆ All models comply with the standards of the main international approval bodies and are CE marked.

TECHNICAL DATA CHARACTERISTICS	MODELS	
	NGW 402070	NGWDPDD 402071
Water supply		
temperature - °C	10	10
hardness - °f	7-14	7-14
Drain pump		●
Detergent dispenser		●
N° of cycles	1	1
Duration cycles - sec.	120	120
Basket capacity/h	30	30
External dimensions - mm		
width	460	460
depth	565	565
height	715	715
Cell dimensions - mm		
width	400	400
depth	400	400
height	290	290
Washing cycle		
temperature - °C	55-65	55-65
tank capacity - lt.	6	6
power pump - kW	0.3	0.3
electrical elements - kW	0.8	0.8
Hot rinse cycle		
duration - sec.	16	16
temperature during rinse - °C	80-90	80-90
water consumption - lt./cycle	2.3	2.3
Boiler capacity - lt.	5	5
Boiler elements - kW	3	2
Power - kW		
total power	3.3	2.3
Noise level - dBA	<61	<61
Net weight - kg.	37	37
Supply voltage	230 V, 1N, 50	230 V, 1N, 50
<b>INCLUDED ACCESSORIES</b>		
BASKET FOR GLASSES-395X395X100 MM	1	1

OPTIONAL ACCESSORIES		
ACCESSORIES	MODELS	
	NGW 402070	NGWDPDD 402071
BASKET F. GLASSES-ANGLED BASE-395X395X200	867056	867056
BASKET FOR 16/8 PLATES DIAM.190/240 MM	867052	867052
BASKET FOR GLASSES+SAUCERS/CUTLERY INS.	867055	867055
BASKET FOR GLASSES-395X395X100 MM	867053	867053
BASKET FOR GLASSES-395X395X200 MM	867054	867054
COVER GRID FOR SMALL/LIGHT ITEMS IN RACK	867016	867016
FILTER FOR PARTIAL DEMINERALIZATION	864017	864017
FILTER FOR TOTAL DEMINERALIZATION	864015	864015
INCLINED INSERT FOR CUPS	867061	867061
INSERT FOR 14 SAUCERS	867060	867060
INSERT FOR 7 PLATES DIAM. 240 MM	867062	867062
INSERT FOR"FLUTE"GLASSES	867058	867058
KIT 4 PLASTIC BOXES FOR CUTLERY-YELLOW	865574	865574
KIT TO MEASURE TOTAL/PART.WATER HARDNESS	864050	864050
ROUND BASKET KIT WITH SQUARE FRAME	867057	867057
YELLOW CUTLERY CONTAINER	864242	864242



[www.zanussiprofessional.com](http://www.zanussiprofessional.com)

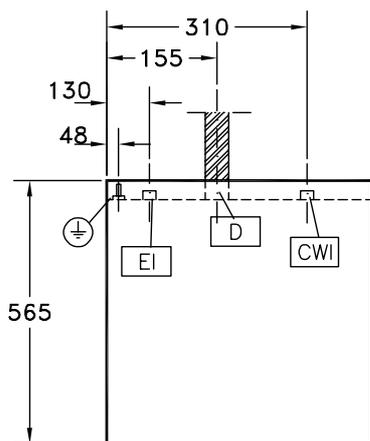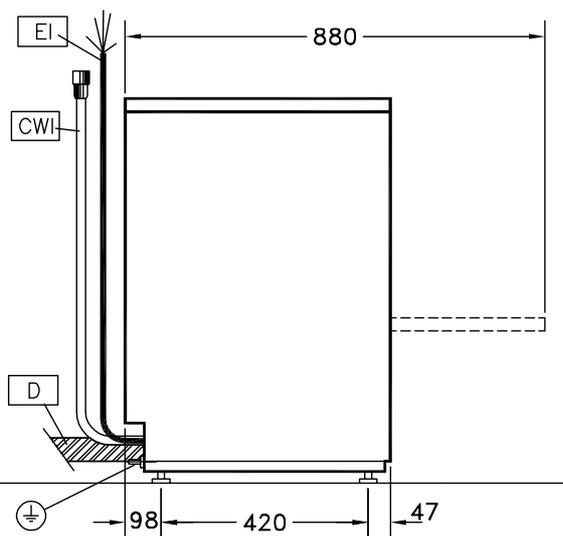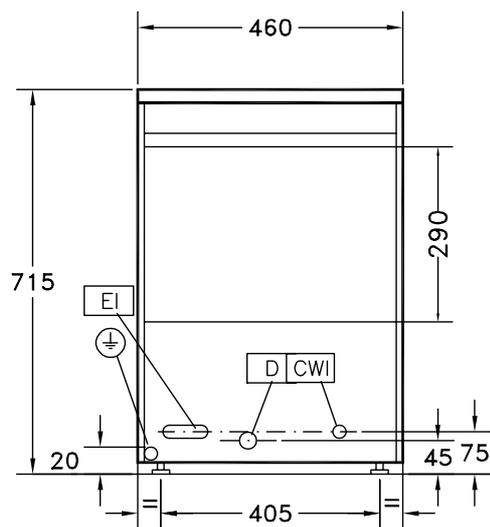


ITC-S06002

LEGEND

	NGW 402070
CWI - Cold water inlet	G 3/4"
D - Water drain	22mm
EI - Electrical connection	230 V, 1N, 50



www.zanussiprofessional.com

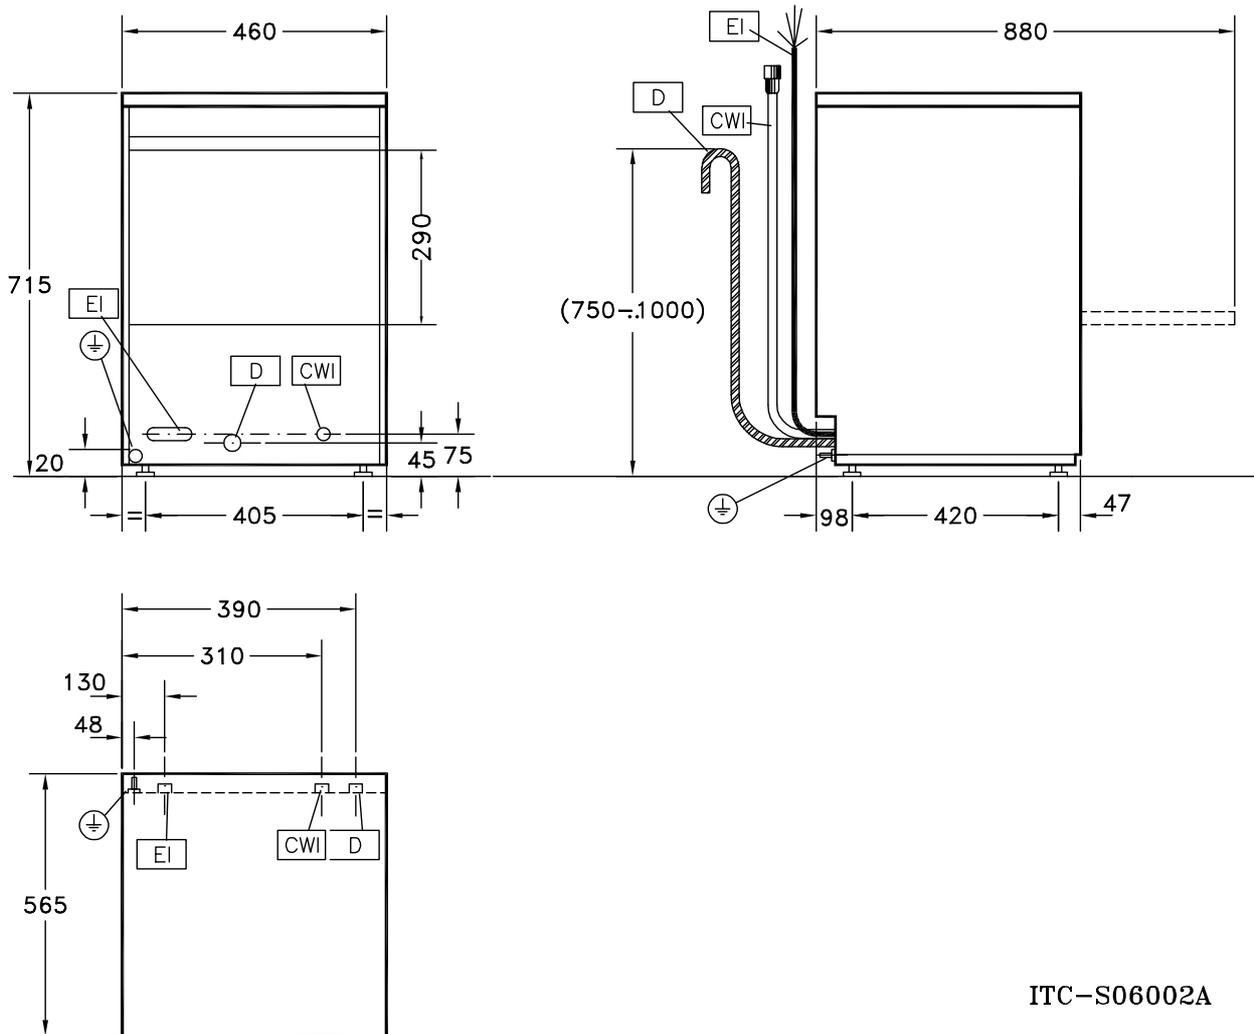

ITC-S06002A

LEGEND

	NGWDPDD 402071
CWI - Cold water inlet	G 3/4"
D - Water drain	27mm
EI - Electrical connection	230 V, 1N, 50



www.zanussiprofessional.com