

## green&clean Undercounter

The Electrolux green&clean Dishwashing range is produced for customers with the highest conceivable demands for good efficiency, economy and ergonomics for dishwashing operations. The product range is comprised of glasswashers, undercounter dishwashers, hood type dishwashers, rack type dishwashers, flight type dishwashers and pot and pan washers. The undercounter dishwashers have a capacity of 40 baskets per hour.



502025

### SANITIZATION AND PERFORMANCE

- The atmospheric boiler in the Wash Safe Control models, combined with the rinse booster pump offers perfect rinsing performances in terms of quality, high water temperature and pressure, always constant at 84°C during rinsing cycles and is independent from the water pressure of the network (with a minimum of 0.5 bar).
- Code 502043 with pressure boiler guarantees rinse quality by providing rinsing water at a temperature of more than 82.5°C (water supply at 2 bar and 50°C).
- The green light of the "Wash Safe Control" available for all models excluding 502043, confirms that items have been

properly rinsed.

- 4 second (variable) pause after washing and before rinsing ensures that no drops of unclean water will fall on the clean items at the end of the rinsing cycle.
- Three dishwashing programs: 1st cycle of 90 seconds for lightly soiled items, 2nd cycle of 120 seconds for normally soiled items and 3rd cycle of 240 seconds for heavily soiled items.
- Fault auto-diagnosis system.

### LOW RUNNING COSTS

- An effective rinse system that uses only 3 litres of clean hot water per rack to ensure lower running costs (in energy, water and chemical consumption).

- Double skinned insulated wall ensures a low noise level and a reduction in heat loss from the machine.

### HYGIENE AND RELIABILITY

- All the machines have smooth surfaces to facilitate cleaning.
- Large deep drawn wash tank and internal wash area with round corners and no pipes to avoid dirt built-up.
- The fully automatic self-cleaning cycle avoids the risk of bacteria proliferation.
- The boiler drain facilitates the evacuation of stagnant water after long periods of inactivity to ensure a higher level of hygiene.



**Electrolux**

**Electrolux Dishwashing  
green&clean Undercounter**

- High efficiency air gap (class A) in water inlet circuit to avoid water being siphoned back into the network as a result of a sudden drop in main pressures.
- Front and side panels, door, wash tank, tank filter and wash/rinse arms made in heavy duty anti-corrosive AISI 304 stainless steel to guarantee appliance durability.
- 304L stainless steel boiler with higher welding protection improves the resistance against corrosion from chlorinated water.
- PVC water supply hose with metal connections resistant to high water pressure.
- Completely closed on the reverse by a cover plate while IPX4 water protection prevents external infiltrations.

**FLEXIBILITY AND ERGONOMICS**

- The incorporated Soft Start feature offers additional protection to delicate items such as glassware and crockery and increases wash pump reliability.
- Simple control panel with digital display allows on-site personalization of washing and rinsing cycle times and temperatures as well as precise rinse aid and detergent quantities depending on the customers needs.
- Three phase or single phase electrical connection, convertible on-site.
- All machines are pre-arranged to accept external dispensers.
- Counterbalanced door with springs to lighten the load when opening and closing.

- The wash tank filters can be removed without extracting the washing and rinsing arms.
- Pre-arrangement for HACCP system implementation and Energy Management device.

**EASY ON THE ENVIRONMENT**

- 98% recyclable by weight.
- CFC free packaging.
- In compliance with CE requirements.
- Low noise level.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Code 502033 in compliance with WRC requirements.

\* Duration cycles: declared actual cycle duration times can extend when water supply temperature is lower than indicated.


	<b>EUCI 502043</b>	<b>EUCAI 502025</b>	<b>EUCAIDP 502026</b>	<b>EUCAI60 502027</b>	<b>EUCAIDD 502058</b>	<b>EUCAIG 502033</b>
<b>TECHNICAL DATA</b>						
Wash Safe Control		●	●	●	●	●
Boiler type	Pressure	Atmospheric	Atmospheric	Atmospheric	Atmospheric	Atmospheric
Open air gap (WRC)						●
Water supply						
temperature - °C	50	50	50	50	50	50
hardness - °f	7-14	7-14	7-14	7-14	7-14	7-14
Thermometer	●	●	●	●	●	●
Drain pump			●	●	●	●
Rinse Booster Pump		●	●	●	●	●
Detergent dispenser					●	●
Rinse aid dispenser	●	●	●	●	●	●
N° of cycles	3	3	3	3	3	3
Duration cycles - sec.	90/120/240	90/120/240	90/120/240	90/120/240	90/120/240	90/120/240
Dishes capacity/h	720	720	720	720	720	720
Basket capacity/h	40	40	40	40	40	40
External dimensions - mm						
width	600	600	600	600	600	600
depth	612	612	612	612	612	612
height	850	850	850	850	850	850
Cell dimensions - mm						
width	500	500	500	500	500	500
depth	500	500	500	500	500	500
height	335	335	335	335	335	335
Washing cycle						
temperature - °C	55-65	55-65	55-65	55-65	55-65	55-65
tank capacity - lt.	23	23	23	23	23	23
power pump - kW	0.736	0.736	0.736	0.736	0.736	0.736
electrical elements - kW	2	2	2	2	2	2
Hot rinse cycle						
duration - sec.	16	12	12	12	12	12
temperature during rinse - °C	80-90	84	84	84	84	84
water consumption - lt./cycle	3	3	3	3	3	3
Boiler capacity - lt.	12	12	12	12	12	12
Boiler elements - kW	4.5	4.5	4.5	4.5	4.5	4.5
Power - kW						
drain pump			0.034	0.034	0.034	0.034
Rinse pump		0.26	0.26	0.26	0.26	0.26
total power	5.35	5.35	5.35	5.35	5.35	5.35
Noise level - dBA	<65	<65	<65	<65	<65	<65
Net weight - kg.	68	68	68	68	68	68
Supply voltage	400 V, 3N, 50	400 V, 3N, 50	400 V, 3N, 50	400 V, 3N, 60	400 V, 3N, 50	230 V, 1N, 50
Convertible to	230 V / 1+N / 50 Hz; 230 V / 3 / 50 Hz;	230 V / 3 / 50 Hz; 230 V / 1+N / 50 Hz	230 V / 3 / 50 Hz; 230 V / 1+N / 50 Hz	230 V / 3 / 60 Hz; 230 V / 1+N / 60 Hz	230 V / 3 / 50 Hz; 230 V / 1+N / 50 Hz	400 V / 3+N / 50 Hz; 230 V / 3 / 50 Hz

**Electrolux Dishwashing  
green&clean Undercounter**

	<b>EUCI 502043</b>	<b>EUCAI 502025</b>	<b>EUCAIDP 502026</b>	<b>EUCAI60 502027</b>	<b>EUCAIDD 502058</b>	<b>EUCAIG 502033</b>
<b>INCLUDED ACCESSORIES</b>						
BASKET FOR 18 DINNER PLATES 240MM-YELLOW	1	1	1	1	1	1
BASKET FOR 48 SMALL CUPS/24 CUPS-BLUE	1	1	1	1	1	1
YELLOW CUTLERY CONTAINER	2	2	2	2	2	2
<b>ACCESSORIES</b>						
12 L EXTERNAL MANUAL WATER SOFTENER	860412	860412	860412	860412	860412	860412
304 AISI BACK PANEL FOR UC TOP LEVEL	864298	864298	864298	864298	864298	
304 AISI BACK PANEL-OPEN-UC TOP LEVEL-UK						864269
8 L EXTERNAL AUTOMATIC WATER SOFTENER	860413	860413	860413	860413	860413	860413
BASKET FOR 18 DINNER PLATES 240MM-YELLOW	867002	867002	867002	867002	867002	867002
BASKET FOR 48 SMALL CUPS/24 CUPS-BLUE	867007	867007	867007	867007	867007	867007
BASKET FOR 5 TRAYS 530X325MM-RED	867006	867006	867006	867006	867006	867006
BASKET FOR WINE GLASSES 500X500X246	867019	867019	867019	867019	867019	867019
BASKET SEMI-PROFESSIONAL 500X500X190MM	867024	867024	867024	867024	867024	867024
BRASS INLET VALVE KIT FOR UC AND HT	864000	864000	864000	864000	864000	864000
COVER GRID FOR SMALL/LIGHT ITEMS IN RACK	867016	867016	867016	867016	867016	867016
DETERGENT LEVEL PROBE KIT FOR UC+HT DW	864004	864004	864004	864004	864004	864004
DETERGENT PUMP KIT	864218	864218	864218	864218		
DRAIN PUMP KIT FOR 50HZ DISHWASHERS	864012	864012				
EXT.REVERSE OSMOSIS FILT-ATMOSPH. BOILER		864026	864026	864026	864026	864026
EXT.REVERSE OSMOSIS FILT-PRESSURE BOILER	864027					
FILTER FOR PARTIAL DEMINERALIZATION	864017	864017	864017	864017	864017	864017
FILTER FOR TOTAL DEMINERALIZATION	864015	864015	864015	864015	864015	864015
HACCP PRINTER KIT FOR UC, HT AND POTW	864002	864002	864002	864002	864002	864002
INTEGRATED HACCP KIT FOR UC, HT AND POTW	864001	864001	864001	864001	864001	864001
KIT 4 CASTORS F.DOUBLE SKINNED UNDERC.DW	864008	864008	864008	864008	864008	864008
KIT 4 PLASTIC BOXES FOR CUTLERY-YELLOW	865574	865574	865574	865574	865574	865574
KIT HACCP EKIS	922166	922166	922166	922166	922166	922166
KIT PRESSURE BOOSTER FOR RINSING WATER	860415					
KIT TO MEASURE TOTAL/PART WATER HARDNESS	864050	864050	864050	864050	864050	864050
RINSE AID LEVEL PROBE KIT FOR UC+HT DW	864005	864005	864005	864005	864005	864005
STAINLESS STEEL INLET HOSE KIT	864016	864016	864016	864016	864016	864016
STAND FOR UNDERCOUNTER DISHWASHER	860418	860418	860418	860418	860418	860418
WIRE BASKET FOR 12 PLATES UP TO 320 MM	867014	867014	867014	867014	867014	867014
YELLOW CUTLERY CONTAINER	864242	864242	864242	864242	864242	864242

**Electrolux Dishwashing  
green&clean Undercounter**

502043, 502033, 502058, 502027, 502026, 502025

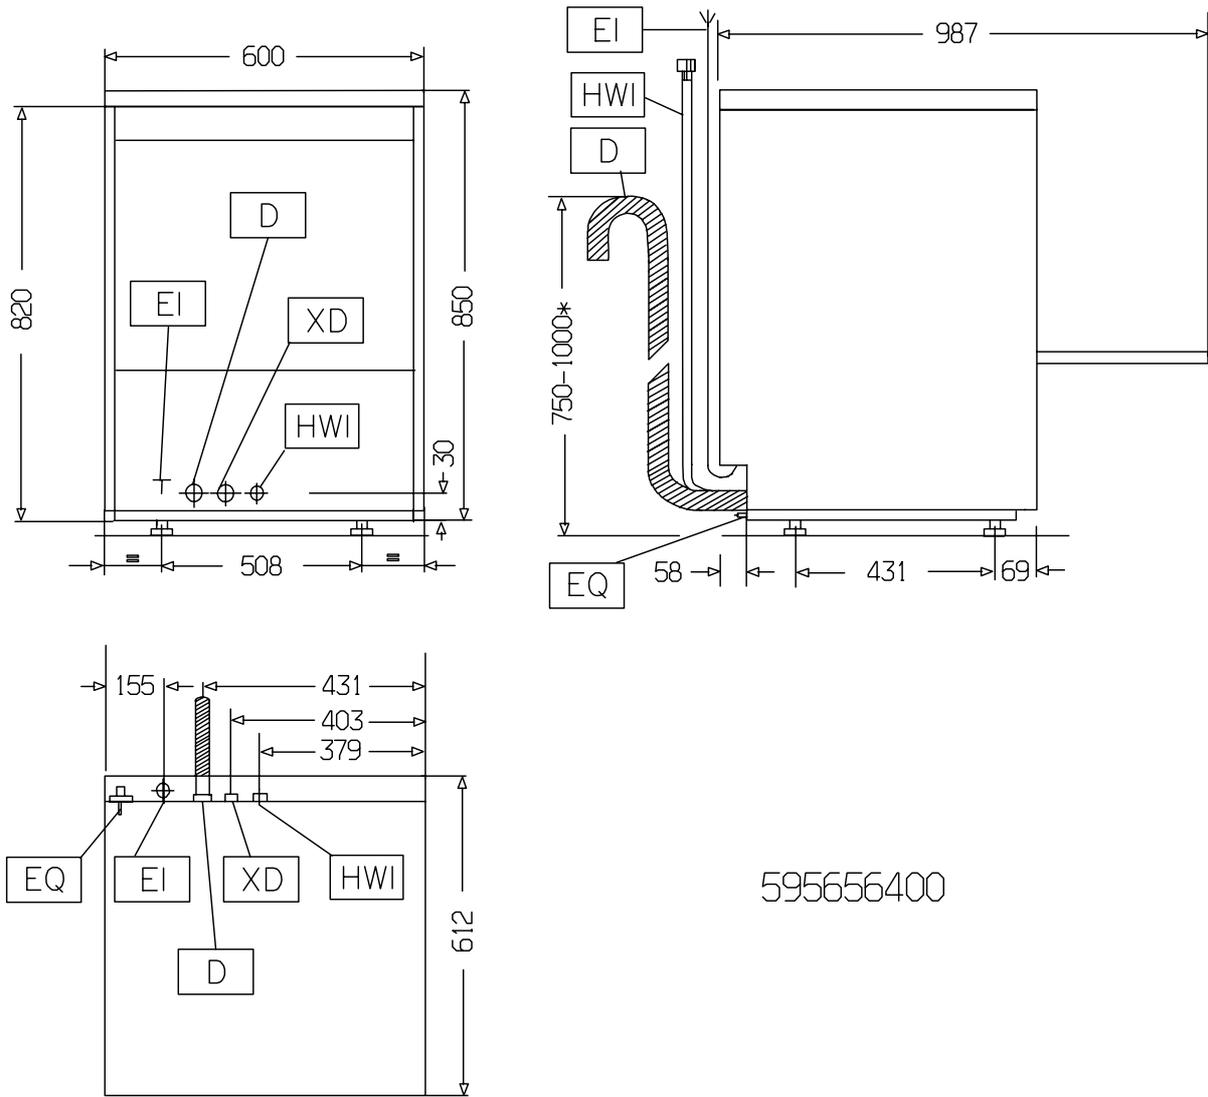

595656400

IBC010

2009-06-18

LEGEND	EUCI 502043	EUCAI 502025	EUCAIDP 502026	EUCAI60 502027	EUCAIDD 502058	EUCAIG 502033
D - Water drain	40 mm	40 mm	20.5mm	20.5mm	20.5mm	20.5mm
EI - Electrical connection	400 V, 3N, 50	400 V, 3N, 50	400 V, 3N, 50	400 V, 3N, 60	400 V, 3N, 50	230 V, 1N, 50
EQ - Equipotential Screw	●	●	●	●	●	●
HWI - Hot water inlet	G 3/4"	G 3/4"	G 3/4"	G 3/4"	G 3/4"	G 3/4"
XR - Connection for detergent dispenser	●	●	●	●	●	●

Subject to change without notice