

CENTRAL PNEUMATIC®

TRUCK CAB AIR BLOW-GUN KIT, Model 65041

SET UP AND OPERATING INSTRUCTIONS



Distributed exclusively by Harbor Freight Tools®.
3491 Mission Oaks Blvd., Camarillo, CA 93011
Visit our website at: <http://www.harborfreight.com>



**Read this material before using this product.
Failure to do so can result in serious injury.
SAVE THIS MANUAL.**

Copyright© 2008 by Harbor Freight Tools®. All rights reserved. No portion of this manual or any artwork contained herein may be reproduced in any shape or form without the express written consent of Harbor Freight Tools. Diagrams within this manual may not be drawn proportionally. Due to continuing improvements, actual product may differ slightly from the product described herein. Tools required for assembly and service may not be included.

For technical questions or replacement parts, please call 1-800-444-3353.

SAVE THIS MANUAL

Keep this manual and the receipt in a safe and dry place for future reference.

Specific Safety Instructions

1. **WARNING:**
To prevent injury:
 - a. The brass components of this product contain lead, a chemical known to the State of California to cause birth defects (or other reproductive harm). (California Health & Safety Code § 25249.5 et seq.)

- b. Use compressed air only.
- c. Wear ANSI-approved safety goggles during installation and use.
- d. Do not exceed 90 PSI air pressure.

NOTE: The warnings and precautions discussed in this manual cannot cover all possible conditions and situations that may occur. It must be understood by the operator that common sense and caution are factors which cannot be built into this product, but must be supplied by the operator.


2. Keep the work area clean and well lighted. .

3. **Keep bystanders, children, and visitors away while operating the tool.**
4. Obey the manual for the truck cab air compressor used to power this tool.
5. **Stay alert. Use common sense. Do not use the tool while tired or under the influence of drugs, alcohol, or medication.**

Tool use and care

1. Do not use the Air Blow Gun if the Trigger Lever does not turn the tool on or off. Repair before further use.
2. Disconnect the Air Blow Gun from the air source before adjusting, or storing the tool.

Air source

1.  Never connect to an air source that is capable of exceeding 200 psi. Over pressurizing the tool may cause bursting, abnormal operation, breakage of the tool or serious injury to persons. Use only clean, dry, regulated compressed air at the rated pressure or within the rated pressure range as marked on the tool. Always verify prior to using the tool that the air source has been adjusted to the rated air pressure or within the rated air-pressure range.
2. **Never use oxygen, carbon dioxide, combustible gases or any bottled gas as an air source for the tool.**

Service

1. **Tool service must be performed only by qualified repair personnel** using only identical replacement parts.

Assembly

1. NOTE: If you do not feel qualified to safely install this Air Blow Gun, have it installed by a qualified technician.
2. NOTE: Tools Needed: Two small adjustable wrenches, small metal saw.

3. Make sure both the truck engine and auxiliary generator is shut down.
4. Follow manufacturer's directions for locating the truck cab air line. Usually it is located behind the drivers seat.
5. Cut the truck cab air line and install the T-Fitting (2) as follows:
 - a. Remove the nuts on the two ends of the T-Fitting body.
 - b. Slide the Compression Sleeves out of the T-Fitting body. Slide an end of the truck cab air line through a nut and Compression Sleeve and into openings on the T-Fitting body.
 - c. Thread the nuts onto the T-Fitting body and tighten snugly. This will compress the Compression Sleeves and seal the air line.
 - d. The procedure is the same as laid out in steps (a) through (d) for attaching the Truck Cab Air Blow Gun line.

CAUTION: Make sure all air line fittings are not leaking when the generator(s) are operating. They may be connected to other needed accessories.

General Operating Instructions

1. **CAUTION! Do Not exceed maximum air pressure rating of 90 PSI.**
2. **WARNING: Never direct the Air Blow Gun at your skin, or any person or animal.**
3. Attach Air Gun (4) by threading onto air line.
4. Thread on the Precision Tip for blowing out small areas or cracks, or the Booster Tip for wide areas.
5. Point the Air Gun and squeeze the Trigger Lever.
6. When finished, Release the Trigger Lever to stop the air flow.
7. Leave the Air Blow Gun hooked up and coiled under the drivers seat of the truck cab when not in use.


Cleaning, Maintenance

Periodically wipe down entire length of Air Line and inspect for leaks. If any are found, replace Air Line; DO NOT repair.

PARTS LIST

Part	Discription	Q'ty
1	Trigger Lever	1
2	T-Fitting	1
3	Air Line	1
4	Air Gun	1
5	Precision Tip	1
6	Booster Tip	1

ASSEMBLY PHOTO

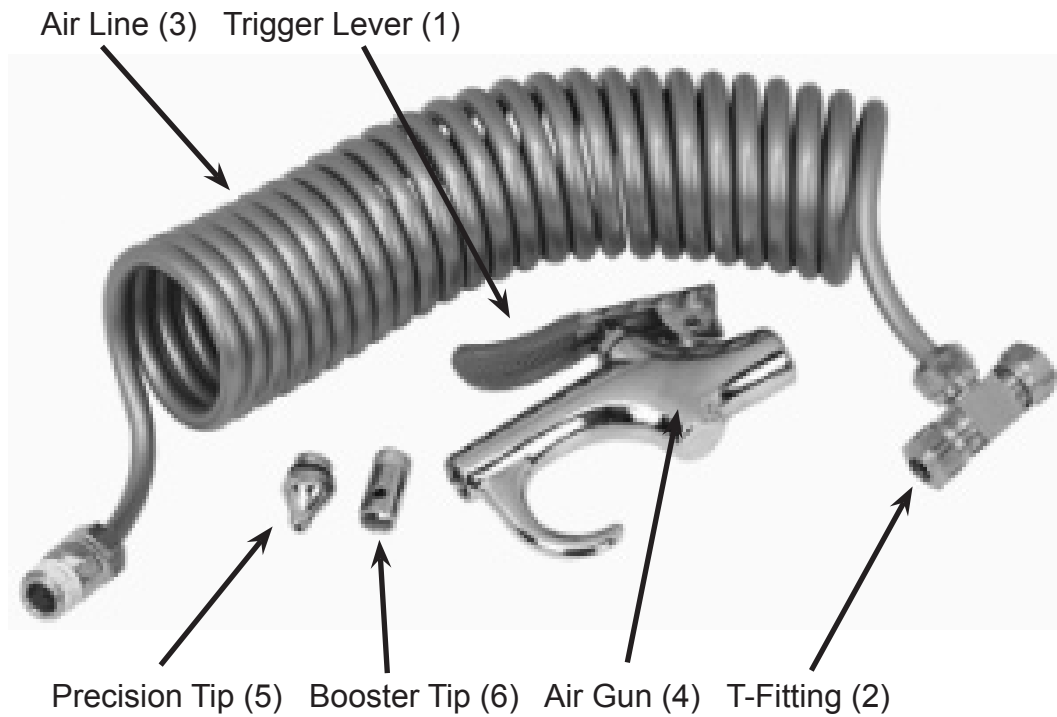

LIMITED 90 DAY WARRANTY

Harbor Freight Tools Co. makes every effort to assure that its products meet high quality and durability standards, and warrants to the original purchaser that this product is free from defects in materials and workmanship for the period of 90 days from the date of purchase. This warranty does not apply to damage due directly or indirectly, to misuse, abuse, negligence or accidents, repairs or alterations outside our facilities, criminal activity, improper installation, normal wear and tear, or to lack of maintenance. We shall in no event be liable for death, injuries to persons or property, or for incidental, contingent, special or consequential damages arising from the use of our product. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation of exclusion may not apply to you. THIS WARRANTY IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS.

To take advantage of this warranty, the product or part must be returned to us with transportation charges prepaid. Proof of purchase date and an explanation of the complaint must accompany the merchandise. If our inspection verifies the defect, we will either repair or replace the product at our election or we may elect to refund the purchase price if we cannot readily and quickly provide you with a replacement. We will return repaired products at our expense, but if we determine there is no defect, or that the defect resulted from causes not within the scope of our warranty, then you must bear the cost of returning the product.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

3491 Mission Oaks Blvd. • PO Box 6009 • Camarillo, CA 93011 • (800) 444-3353

Record Product's Serial Number Here: _____

Note: If product has no serial number, record month and year of purchase instead.

Note: Some parts are listed and shown for illustration purposes only, and are not available individually as replacement parts.