




Tow Hitch Assembly

Item Number: 8241

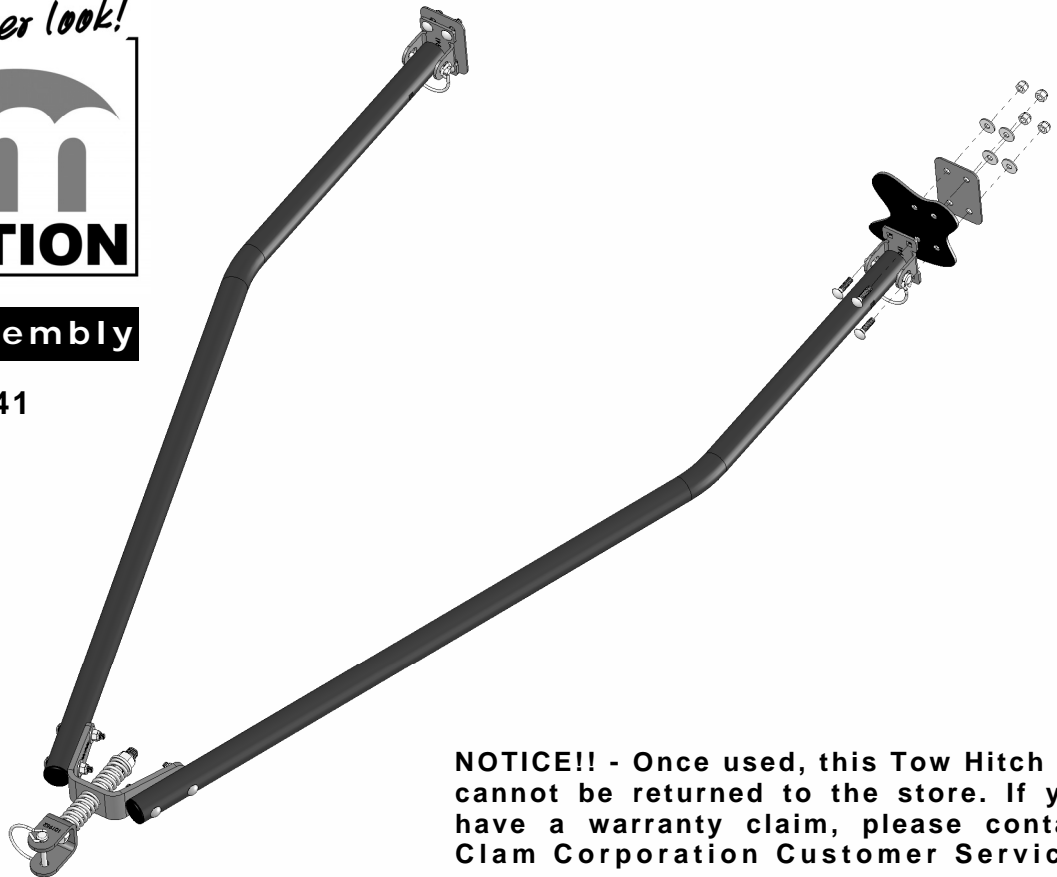

NOTICE!! - Once used, this Tow Hitch Kit cannot be returned to the store. If you have a warranty claim, please contact Clam Corporation Customer Service.

Warranty Information

CLAM Corporation, Inc. warrants to the original retail purchaser its product be free from manufacturer's defects for one (1) year from the date of the original purchase. Clam Corporation will replace or repair any part found defective within the one (1) year time limit. All parts must be returned to Clam Corporation. Before returning any parts, you must first call or write and acquire a return authorization. All returns must be returned postage-prepaid and include the original cash register receipt (date and purchase price).

To obtain a return authorization, please use one of the following methods:

Call: **763-231-4120**

Write: **Clam Corporation, Inc.**
Attn: Customer Service – Returns
600 Cyldesdale Trail
Medina, MN 55340

Email: **CustomerService@ClamCorp.com**

The warranty does not apply to any Tow Hitch Kit which has been subjected to an accident, improper installation, modification, adjustment, repair, misuse, misapplication, neglect, including but not limited to improper maintenance, or use of unauthorized parts or attachments.

Limitation of Liability

It is expressly understood that Clam Corporation's liability for its products, whether due to breach of warranty, negligence, strict liability, or otherwise, is limited to the repair of the product as stated above. Clam Corporation is not liable for any injury, loss, damage, or expense, whether direct or consequential, including but not limited to loss of use, income, profit, or damage to material arising in connection with the sale, installation, use of, inability to use, or the repair or replacement of Clam Corporation products. Clam Corporation reserves the right to make alterations or modifications in its products at any time, which in its opinion, may improve the performance and efficiency of the product. It shall not be obligated to make such alterations or modifications to products already in service.

ASSEMBLY DIAGRAM


TENSION:
TIGHTEN THE 1/2" LOCKNUT
(ITEM #4) UNTIL THE SPRINGS
ARE SLIGHTLY COMPRESSED

ASSEMBLY OF THESE
ITEMS TO BE COMPLETED
ON NEXT PAGE

ASSEMBLE THE FRONT
PART OF THE HITCH FIRST
(SEE WIDTH NOTE BELOW)

WIDTH:
MOUNTING WIDTHS OF EITHER 14" OR 24"
ARE DEPENDENT UPON WHICH END OF
THE BENT HITCH TUBE IS ASSEMBLED
TO THE SPRING CONNECTION BRACKET

IF THE 24" MOUNTING WIDTH IS DESIRED,
ASSEMBLE WITH THE LONG LENGTH
OF THE HITCH TUBE AS SHOWN

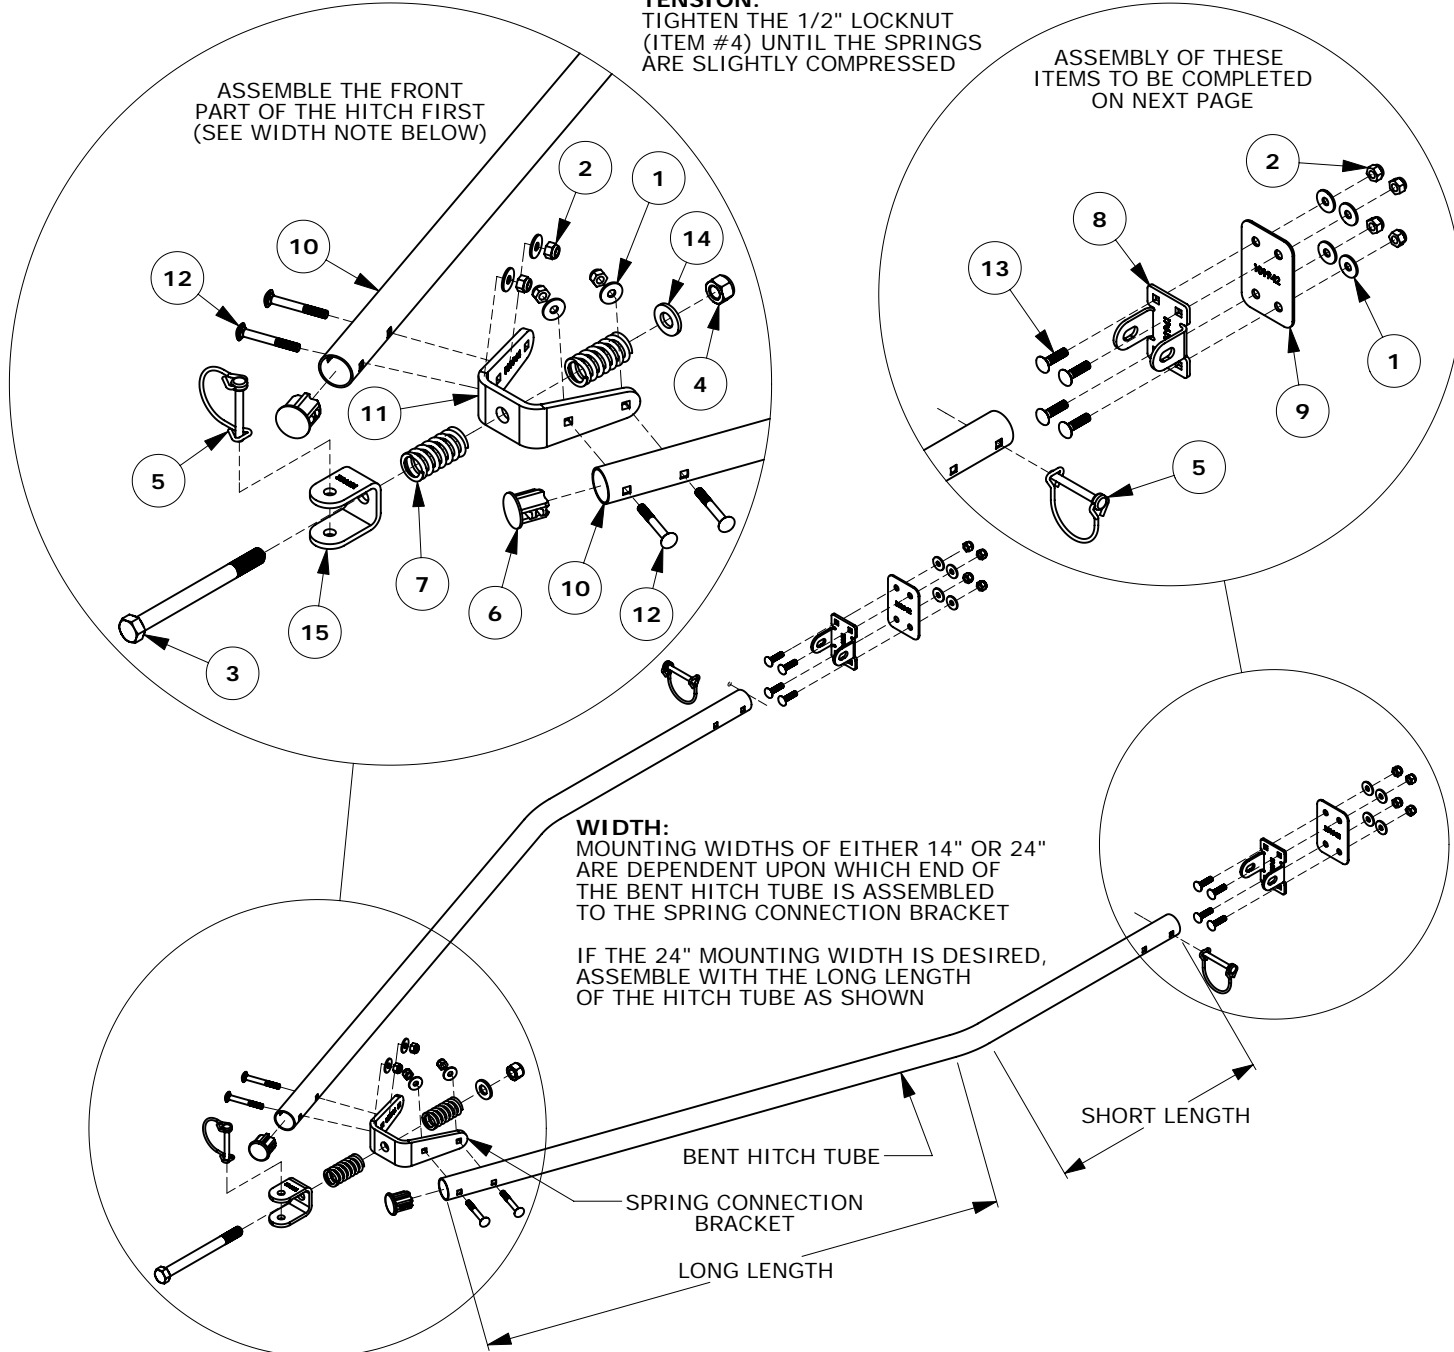

ITEM	PART NO.	DESCRIPTION	QTY.	ITEM	PART NO.	DESCRIPTION	QTY.
1	101081	1/4" FLAT WASHER	12				
2	101163	1/4" LOCKNUT	12	9	101942	HITCH BACK PLATE	2
3	101310	1/2" DIA. X 5-1/2" LONG HEX BOLT	1	10	101943	BENT HITCH TUBE	2
4	101313	1/2" LOCKNUT	1	11	101944	SPRING CONNECTION BRACKET	1
5	101314	1/4" DIA. LYNCH PIN	3	12	101949	1/4" DIA. X 2" LONG CARRIAGE BOLT	4
6	101429	1-3/16" DIA. TUBE PLUG	2	13	101950	1/4" DIA X 1" LONG CARRIAGE BOLT	8
7	101940	1" DIA. X 2" LONG SPRING	2	14	101951	1/2" FLAT WASHER	1
8	101941	HITCH PIVOT BRACKET	2	15	101952	HITCH YOKE BRACKET	1

MOUNTING TO SLED

- 1.) INSERT OR ATTACH THE LYNCH PINS TO THE PIVOT BRACKETS AND HITCH ASSEMBLY.
- 2.) PLACE OR POSITION THE HITCH ASSEMBLY AT THE DESIRED MOUNTING LOCATION.

NOTE: Mounting height depends on the design of the sled base and therefore is subjective. We recommend mounting as low as feasibly possible. However, before mounting, verify that there are no pivot obstructions (such as the outside lip of the base) when mounted to the towing vehicle.

- 3.) MARK THE DRILL LOCATIONS USING THE MOUNTING HOLES OF THE PIVOT BRACKET AS A TEMPLATE.
- 4.) DRILL THE MARKED POSITIONS USING A 1/4" OR SLIGHTLY LARGER DRILL BIT.
- 5.) INSTALL THE HARDWARE AS SHOWN BEFORE SECURING FASTENERS.

TOWING LOADS SAFELY

- TRAVEL SLOWLY WHEN TOWING AND ALLOW EXTRA TIME AND DISTANCE TO STOP.
- TOTAL TOWED WEIGHT MUST NOT EXCEED LIMITS SPECIFIED IN TOWING VEHICLE'S OWNER'S MANUAL.
- REDUCE TOWED WEIGHT WHEN OPERATING ON SLOPES.
- NEVER ALLOW CHILDREN OR OTHERS IN OR ON TOWED EQUIPMENT WHILE TOWING.
- USE ONLY APPROVED HITCHES. TOW ONLY WITH A MACHINE THAT HAS A HITCH DESIGNED FOR TOWING.
- DO NOT ATTACH HITCH ASSEMBLY AT AN UNAPPROVED HITCH POINT.
- DO NOT TURN SHARPLY. USE CAUTION WHEN TURNING OR OPERATING UNDER ADVERSE CONDITIONS.

