EQR400

Four Channel Simplex Digital Video Recorder





Affordable, Easy to Operate Four Channel Digital Video Recorder



The EQR400 is an economical digital video recorder designed specifically for entry-level digital security applications. EQR400's VCR-like

operations allows the unit to be used as a simple, hassle-free DVR. This means that a PC, a mouse and complicated software are not required to operate it. A USB2.0 port is provided to give the user the option to control the unit from a PC. EQR400, incorporating all the benefits of digital video recording, is easy to install and operates just like a VCR. Whether for retail shops, banks or other small business applications, the EQR400 provides the entry level digital CCTV solution at a price that makes sense.

Features

- 1010-4-CH cost-effective DVR
 - · Camera inputs (NTSC/PAL)
 - · TV monitor out / Call (spot) monitor out
 - Modified Motion JPEG compression with resolution up to 640x224 (NTSC) / 640x272 (PAL)
- Video is stored in up to 2 built-in IDE HDDs. Non-editable video data
 - 3 kinds of recording schedule modes: Auto/ Manual/ Alarm
 - · 2 kinds of video recording modes: Multiplex/Quad

- Real time live display with total 120(NTSC)/100(PAL) fps
- Recording up to 6.25/7.5 fps per channel for multiplex mode
- · Recording up to 25/30 fps for quad mode
- · Quick start-up
- · Quad or full-screen display
- Video is stored in up to 2 built-in IDE HDDs. Non-editable video data
- · On screen display menu operated by front buttons
- · Quick data search by date/time for playback
- · PC-Link for retrieving the data in the HDD
- · RS232 port for remote controller keypad

Advantages

LONG RECORDING TIME WITH LOW MAINTENANCE

Digital recording on two internal hard disks eliminates many service issues related to the traditional VCR. No longer will you have to stock spare units or clean recording heads and tape transport mechanism. Fewer moving parts mean less maintenance and repair, and less down time which adds adds up to big savings in time and money.

AFFORDABLE AND POWERFUL

The EQR400 range has a price and feature set that now makes digital technology accessible to smaller applications where a dedicated CCTV system is required.

► Wide Variety of Applications for Security Surveillance



Drugstore /
Convenience store



Parking lots / Gas station



 Day care center / Home security



· Warehouse / Office building



▶ Time Lapse Mode Recording Time


The total HDDs' capacity are 240 GB (The data is for reference based on mid-resolution cameras.)

AND ALL PARTY OF THE PARTY OF T		NTSC (Multiplex)									NTSC (Quad)								
Total Capture Rate (FPS)	High			2:1	Middle		Low			High			Middle			Low			
(FPS)	day	hour	min	day	hour	min	day	hour	min	day	hour	min	day	hour	min	day	hour	mir	
30	5	21	13	7	18	24	9	17	1	3	11	13	4	9	55	5	9	27	
15	11	18	26	15	12	49	19	10	2	6	22	26	8	19	50	10	18	54	
10	17	15	40	23	7	14	29	3	3	10	9	39	13	5	45	16	4	21	
7	25	5	14	33	6	54	41	14	38	14	20	39	18	21	55	23	2	48	
4	44	3	10	58	6	6	72	19	37	26	0	9	33	2	22	40	10	54	
3	58	20	13	77	16	8	97	2	10	34	16	12	44	3	10	53	22	32	
2	88	6	20	116	12	12	145	15	15	52	0	18	66	4	45	80	21	48	
1	176	12	40	233	0	24	291	6	30	104	0	36	132	9	30	161	19	36	

neuropietosa a trada como tra	PAL (Multiplex)										PAL (Quad)								
Total Capture Rate (FPS)	High				Middle		Low			High			Middle			Low			
	day	hour	min	day	hour	min	day	hour	min	day	hour	min	day	hour	min	day	hour	min	
25	7	12	24	8	15	7	11	2	18	3	14	2	4	7	33	5	7	6	
12	15	15	50	17	23	30	23	2	48	7	11	14	8	23	45	11	0	47	
8	23	11	45	26	23	16	34	16	12	11	4	51	13	11	38	16	13	11	
6	31	7	40	35	23	1	46	5	36	14	22	29	17	23	30	22	1	35	
4	46	23	30	53	22	32	69	8	24	22	9	43	26	23	16	33	2	22	
3	62	15	20	71	22	3	92	11	12	29	20	58	35	23	1	44	3	10	
2	93	23	0	107	21	4	138	16	48	44	19	27	53	22	32	66	4	45	
1	187	22	0	215	18	9	277	9	37	89	14	55	107	21	4	132	9	30	

▶ Major Operating Controls


Front Panel Keypads

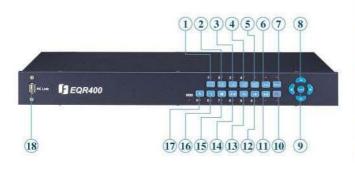

- 1 Camera 1 full screen display
- 2 Camera 2 full screen display
- (3) Camera 3 full screen display
- (4) Camera 4 full screen display
- (5) Quad display
- 6 Full screen sequence display
- (7) Setup menu
- 8 Arrow buttons
- (9) Enter button
- 10 Rec. button
- 11) Time search and fast forward playback

- (12) Time search and step forward playback
- (3) Time search and step reverse playback
- (4) Time search and fast reverse playback
- 15 Stop playback
- 16 Pause
- 17) Time search and playback
- (18) USB port for PC link

Back Panel keypads

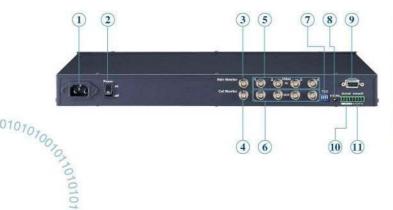

- 1 Power socket
- 2 Power switch
- 3 Main monitor connector
- (4) Call monitor connector
- © ----
- 5 Video Input connectors 1-4
- (6) Video Output connectors 1-4
- (7) 75ohm termination 1-4
- (8) NTSC/PAL switcher

- 9 RS 232 connector
- (10) Alarm Inputs: Connect to alarm inputs 1-4 and 1 common ground
- (1) Alarm Outputs: Connect to 1 Normally Closed alarm output, 1 Normally Open alarm output and 1 common ground

Specifications

Model No:	EQR400 (Four Channel Simplex Digital Video Recorder)							
	Har Strongs							
	FEQR400 - 00 00 00 00 00 00 00 00 00 00 00 00							
Video Format	NTSC/EIA or PAL/CCIR, DIP switch selectable							
Video Input	4 camera inputs, 1Vp-p/75ohm							
Video Loop-through	4 camera loop-through outputs, 1Vp-p/75ohm							
Video Output	Main Monitor: 1 BNC composite video output, 1Vp-p/75ohm							
	Call Monitor: 1 BNC composite video output, 1Vp-p/75ohm							
Video Compression	Modified Motion JPEG with 3 levels recording quality							
Video Resolution	Up to 640x224 (NTSC) or 640x272 (PAL)							
Video Display	Quad or full screen display							
Display Resolution	720x480 for NTSC, 720x576 for PAL							
Sequential Switch	Yes, with adjustable dwell time (2-90 seconds)							
Live Display Rate	Total 120 fps (NTSC) or 100 fps (PAL)							
Recording Rate	Multiplex: Up to 7.5 fps (NTSC) or 6.25 fps (PAL) per camera							
	Quad: Up to 30 fps (NTSC) or 25 fps (PAL)							
Playback Rate	Multiplex: Total 30 fps for NTSC, 25 fps for PAL							
	Quad: Total 120 fps (NTSC) or 100 fps (PAL)							
Hard Disk Storage	IDE HDD storage, expendable up to 2 HDDs. "Auto Overwrite" or "Stop" for selectable while HDDs are full							
Alarm Input	4 inputs, Contact or TTL/CMOS signal, polarity selectable							
Alarm Output	1 Normally Open, 1 Normally Closed relay outputs							
RS-232	DB-9 male connectors for remote keypad control							
USB	USB2.0 connectors for PC Link							
Buzzer	Yes							
Video Loss Detection	Yes							
User Interface	On screen display setup							
User Input Device	Keypad							
Playback Function	Play / Pause / Stop / Fast Forward / Step Forward / Fast Reverse / Step Reverse							
Security	Password protection							
Timer	Built-in real time clock							
Power Source	110V/220V AC, selectable							
Power Consumption	30W (Two HDD typical)							
Dimension	438(Width)x262(Depth)x44(Height)mm							
Weight	4.4kg(HDD not included)							
Operating Temperature	0°C ~ +40°C							

- Design and specifications are subject to change without prior notice
 Based on United States Federal Regulation: It's required to post warning sign if an audio device is used in conjunction with this machine.

Ordering Information

EQR400-N: Four Channel Digital Video Recorder, NTSC,

AC100/240V

EQR400-P: Four Channel Digital Video Recorder, PAL,

AC100/240V

Distributed by



® EverFocus Electronics Corp.

Head Office:

12F, No.79 Sec. 1, Shin-Tai Wu Road, Hsi-Chi, Taipei Hsien, Taiwan Tel: 886-2-2698-2334 Fax: 886-2-2698-2380 http://www.everfocus.com.tw E-mail: marketing@everfocus.com.tw

USA Office:

2445 Huntington Drive, San Marino, CA 91108, U.S.A. Tel: 1-626-844-8888 Fax: 1-626-844-8838 http://www.everfocus.com E-mail: sales@everfocus.com

Japan Office:

1809 WBG Maribu East 18F, 2-6 Nakase, Mihama-ku, Chiba city 261-7118, Japan Tel: 81-43-212-8188 Fax: 81-43-297-0081

http://www.everfocus.com

E-mail: salesjapan@everfocus.com

Beijing Office:

Room 609, Technology Trade Building, Shangdi, Haidian, Beijing, China Tel: 86-10-62973336/37/38/39 Fax: 86-10-62971423 http://www.everfocus.com.tw E-mail: marketing@everfocus.com.tw

European Office:

Albert-Einstein-Strasse 1, D-46446 Emmerich, Germany Tel: 49-2822-9394-0 Fax: 49-2822-939495 http://www.everfocus.de E-mail: info@everfocus.de