



User Manual for Android App



Shenzhen Foscam Intelligent Technology Co.,Ltd.

Table of Contents

Table of Contents.....	1
1 Overview.....	2
2 Access the IP Camera.....	2
3 Install App.....	2
4 Introduction to IPCam Management Page.....	2
5 Add Cameras to App.....	3
5.1 Add Cameras in LAN.....	3
5.2 Add Cameras by QR Code.....	5
5.3 Add Cameras Manually.....	7
5.4 Edit Device.....	11
5.5 Foscam Demo.....	12
6 Video.....	12
6.1 View Camera Video.....	12
6.2 Set the Video Operation.....	13
6.3 Configure the camera.....	17
6.3.1 IR LED Lights Mode.....	18
6.3.2 Status.....	18
6.3.3 Basic Settings.....	19
6.3.4 Modify the Username/Password.....	19
6.3.5 Wireless Settings.....	19
6.3.6 PTZ.....	20
6.3.7 Motion Detection.....	23
6.3.8 System.....	24
7 Message.....	25
8 Media.....	25
9 Others.....	26
10 Technical support.....	26

1 Overview

FOSCAM provides Android App for Android users, which helps to view and listen to your world anywhere anytime. The following steps will show you how to setup App and enjoy it.

2 Access the IP Camera

Before adding cameras to the App, Please setup the camera and ensure you can connect camera in LAN or WAN according to Quick Installation Guide.


3 Install App


Search and install **Foscam Viewer** on Google Play. Note that the publisher is Foscam. Then you will see the shortcut icon on the device screen.



4 Introduction to IPCam Management Page


Run the App, at the first time, you will see this guidance page. You can slide left to glance these guidance, and you can see these info in More - Help page later.

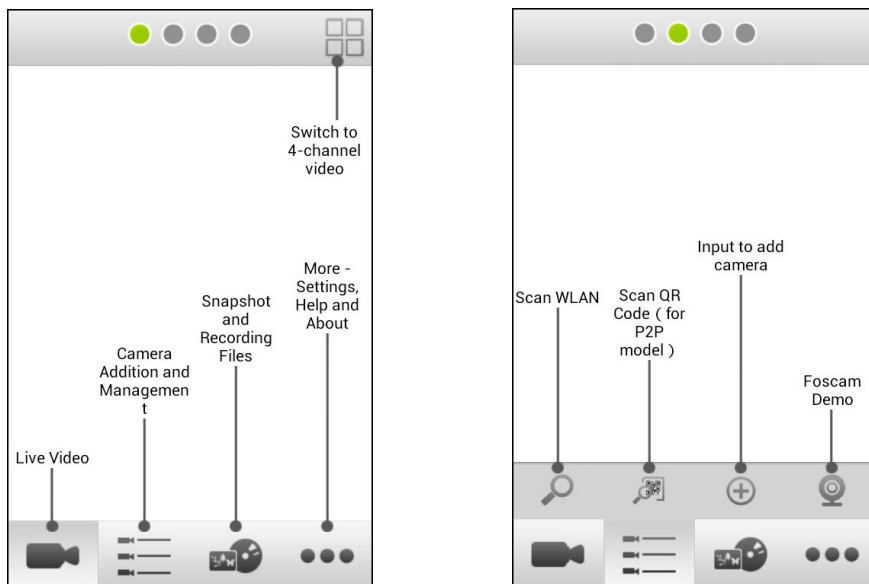

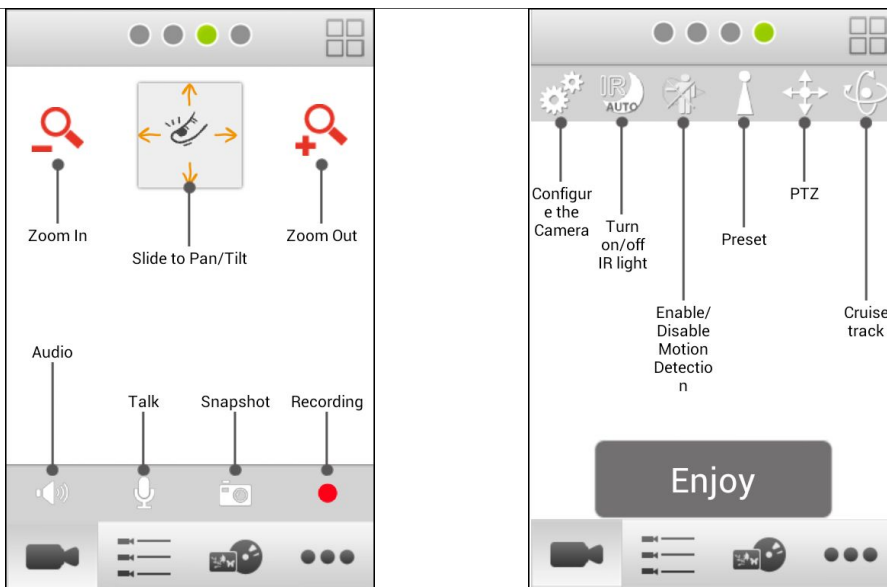


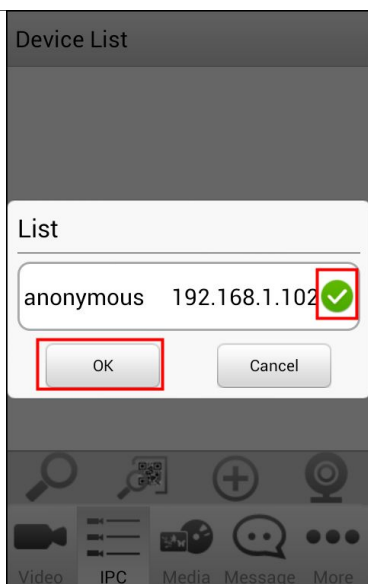
5 Add Cameras to App

Click **Enjoy** to enter App, there are four ways to add camera in **IPC** tab.

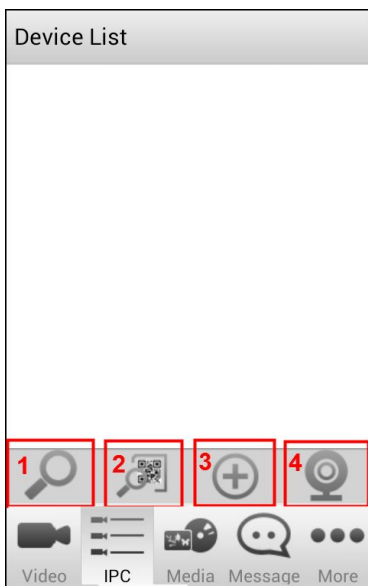


5.1 Add Cameras in LAN

Step1: Tap Search Button  to scan all cameras in LAN. Choose the camera you want to add and click **OK** , the camera can be added to the IPC list.




Step2: Choose the camera you want to connect. The App will pop-up **Input Username and Password** page automatically.

Input the **Username** and **Password** of your camera, click **OK**.

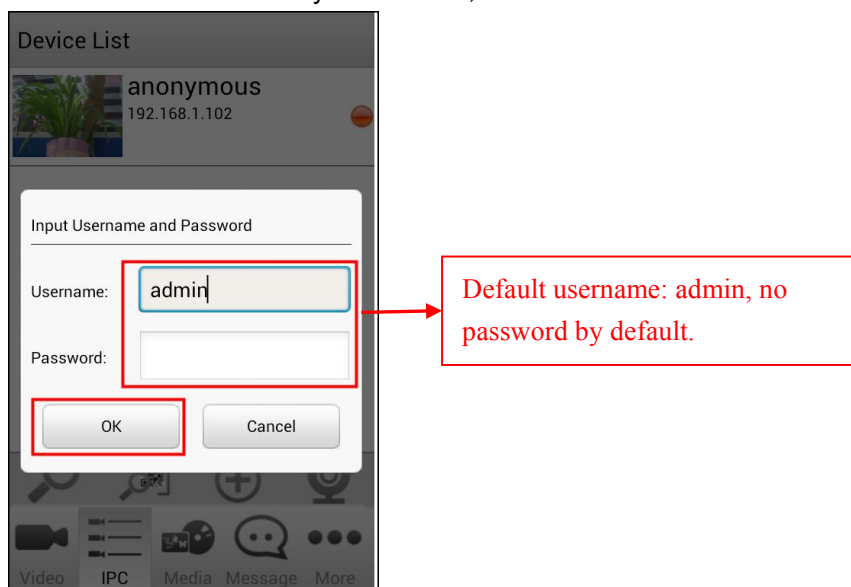


Step3: Modify the Username and Password (If you have modified the Username and Password, you can do not perform this step.)

Input the new username and password, and click **OK**.

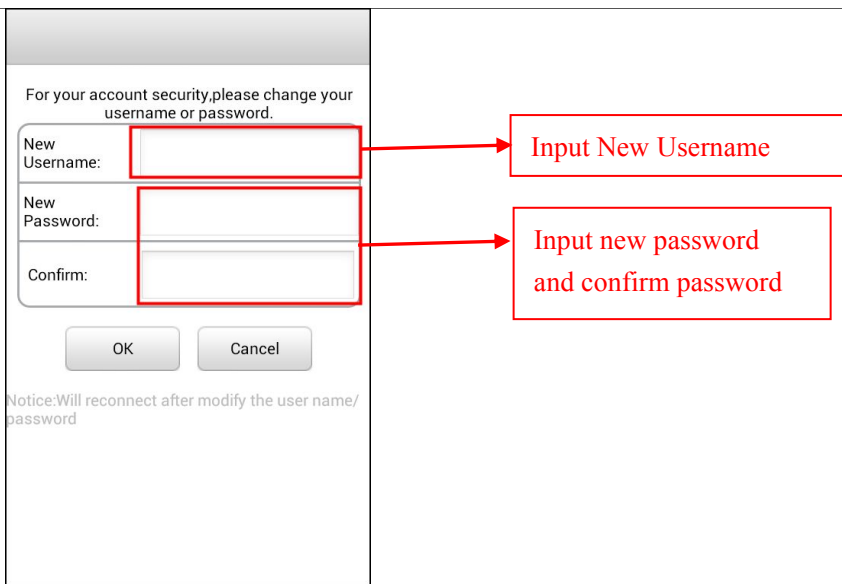


Step4: Successfully Connected to the network camera.

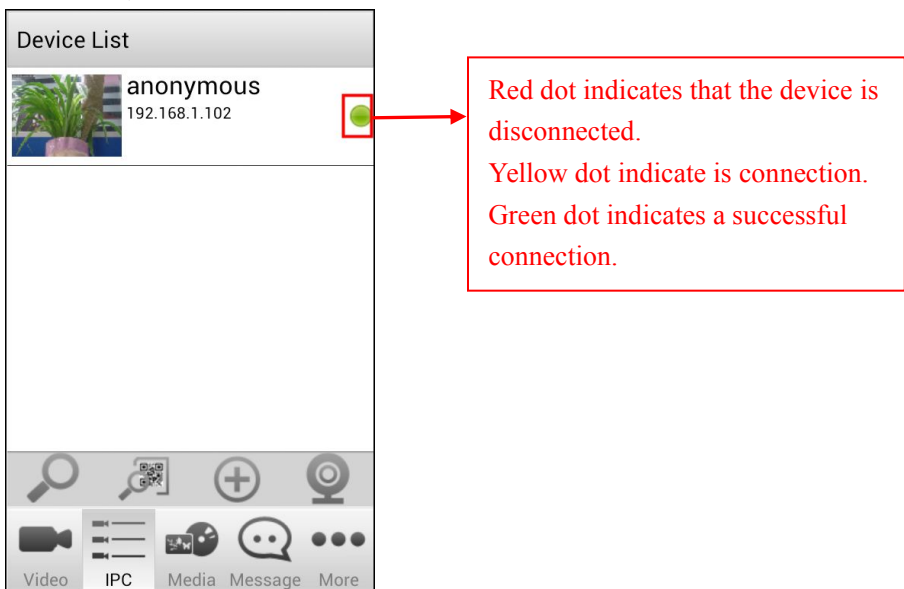

5.2 Add Cameras by QR Code


Only P2P cameras support this way.

Step1: Tap the scan , your phone will go into QR code scanning mode. Scan the QR code on the bottom of the camera.



Model:XXXXXXX
HD Wireless IP Camera


MAC ID:000000000000
 DDNS:XXXX.
 myipcam.org
 Username(default):admin
 Password(default):(blank)



UID:DFJTA1RY8WUF8G6PSZYS

CE FC RoHS

Step2: When you finish the QR code scanning, the App will pop-up device information page automatically, you can input the **Device Name** (used to distinguish the camera on your phone), the **Username** and **Password** (the default username: admin, no password by default) . Click **OK**.

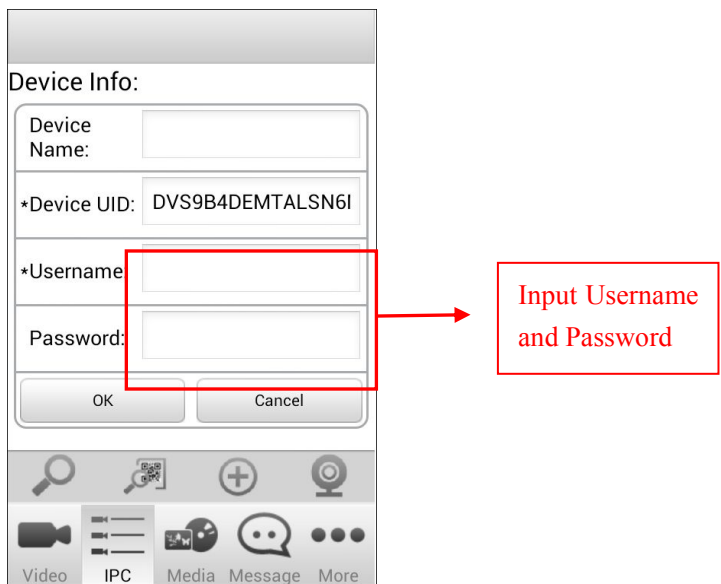


Note:


If the QR code scanning is failed, please input the UID on the bottom label of the camera manually.

Step3: Modify the Username and Password (If you have modified the Username and Password, you can do not perform this step.)

Input the new username and password, and click **OK**.

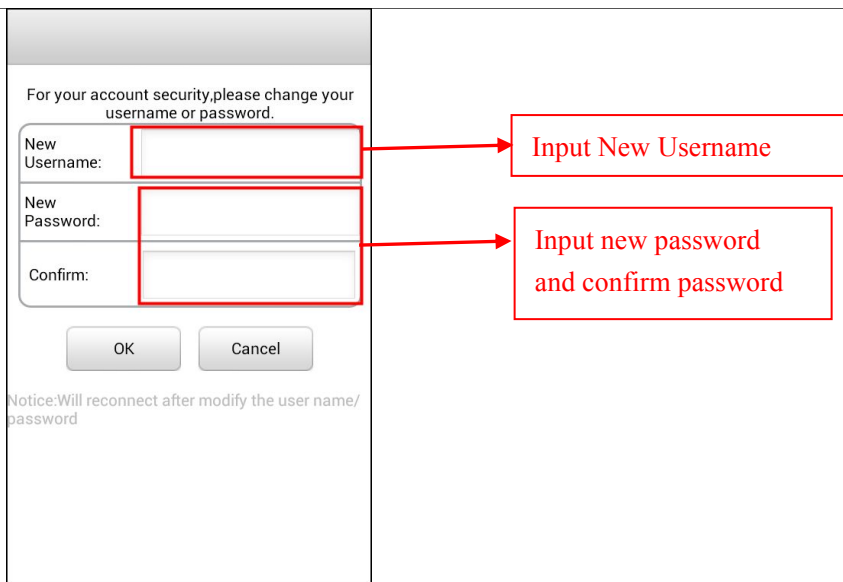

Step4: Successfully Connected to the network camera.

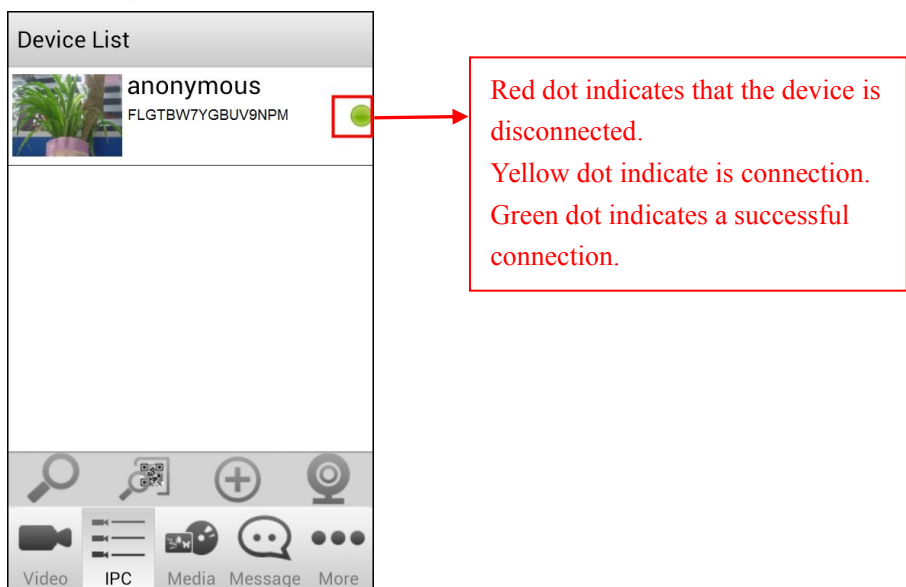


5.3 Add Cameras Manually

Step1: Tap the button  on the IPC page.

Step2: Add the camera manually, the camera can be added by IP Address, DDNS URL and P2P UID.

① **IP Address**

Select Device Type, input the Device Name, IP Address, choose the main stream or sub stream, input Http Port, Media Port, Username and Password (the default username: admin, no password by default).

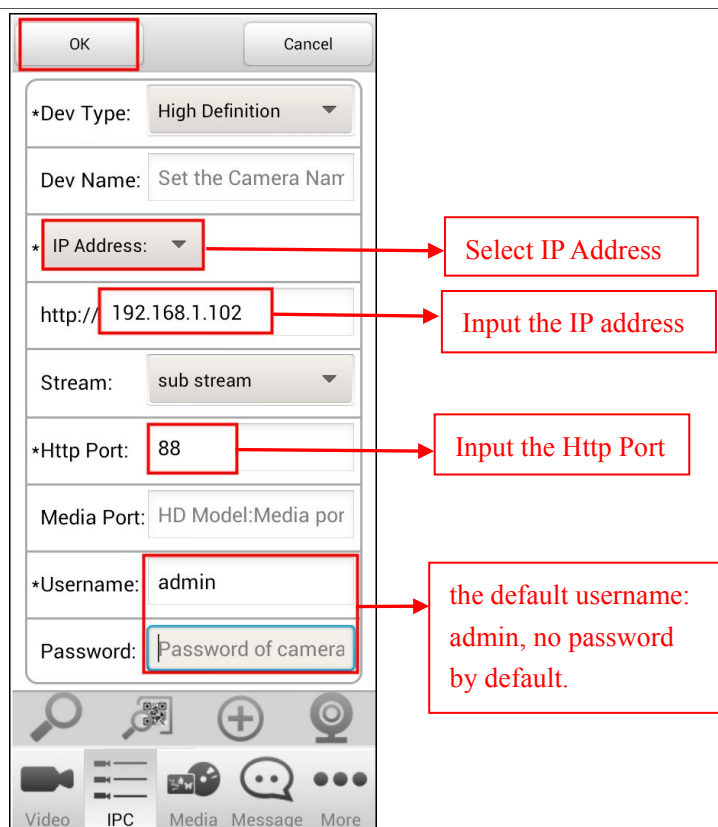

Note: You can get the IP address and Http Port of the camera as follow way.


Insert the CD into the CD drive of your computer. Go to the folder “IP Camera Search Tool” and find the folder “For Windows OS” or “For Mac OS”. Copy and paste the IP Camera Tool file to your computer, or drag it onto your desktop.



Open the IP Camera Tool, it should display the camera's IP address and http port in your local area network.


② DDNS URL

Make sure you can access your camera through Internet by DDNS, then you can follow the QIG to setup DDNS and port forwarding. Select Device Type, input the Device Name, DDNS URL, choose the main stream or sub stream, input Http Port (88 by default), Media Port, Username and Password (the default username: admin, no password by default).

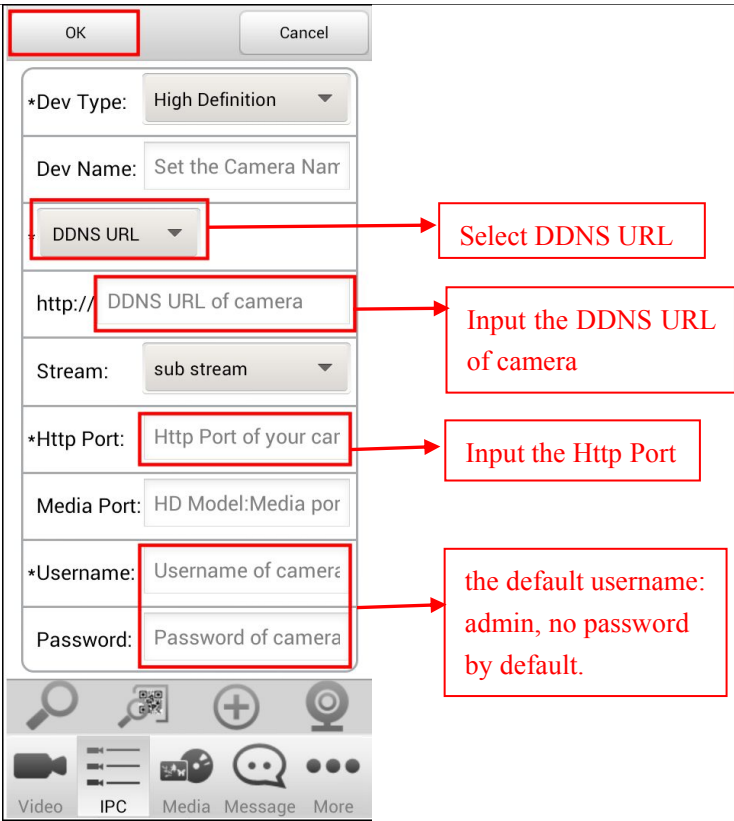

③ P2P UID

Select Device Type, input the Device Name, P2P UID on the bottom label of your camera, choose the main stream or sub stream, input the UID NO., **Username** and **Password** (the default username: admin, no password by default).

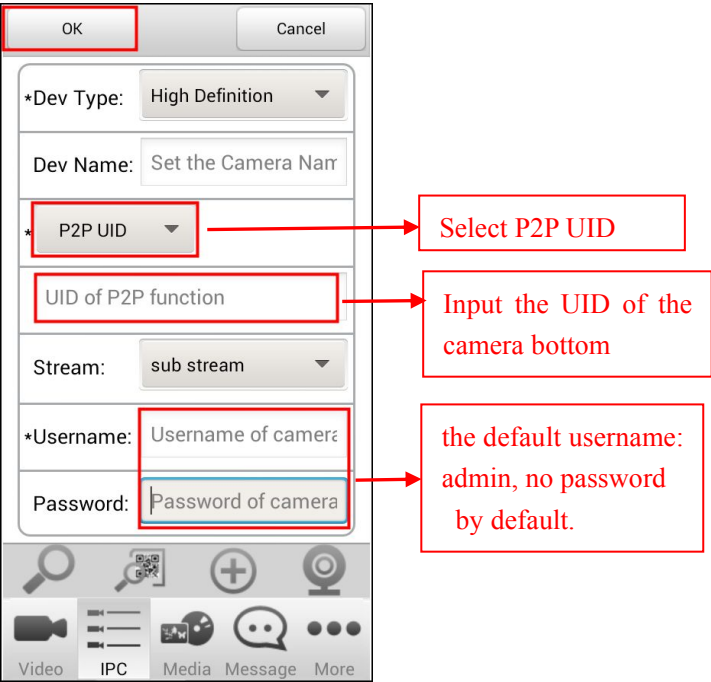

Notes:

- The High Definition and Standard Definition models use different coding, you should select one first.
- If your bandwidth is sufficient, you can choose main stream to view clearer video, if your bandwidth is limited, such as on 3G or LTE, you can choose sub stream to view more smooth video.
- The Device Name here is just used to distinguish the camera on your phone, won't modify the camera name of your IPC.
- Foscam SD cameras and new HD cameras just have HTTP port, only FI9801W, FI9802W, FI9818W and FI9821W have Media Port.

Step3: Modify the Username and Password (If you have modified the Username and Password, you can do not perform this step.)

Input the new username and password, and click **OK**.

For your account security, please change your username or password.

New Username:

New Password:

Confirm:


OK Cancel

Notice: Will reconnect after modify the user name/ password

Input new username

Input new password and confirm password



Step4: Successfully connected network camera.

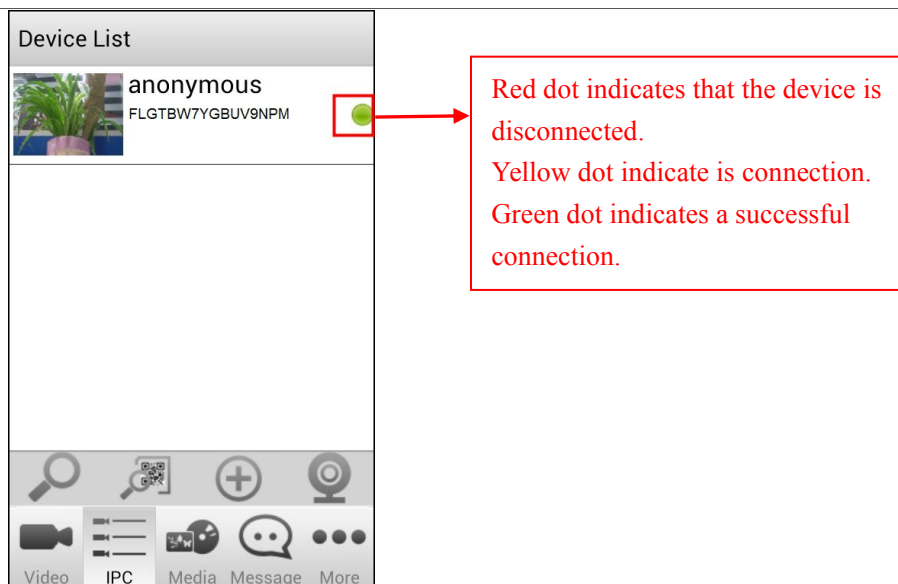


5.4 Edit Device



Press the camera in the **Device List** for more than one second, it will pop-up several options as **Connect/Disconnect, Settings, Edit and Delete**.

- Connect/Disconnect: You can connect the device have been added, or disconnect the device.
- Edit: If you need to modify the device, tap "Edit", renew setup info, then save.
- Settings: "Settings" will allow you to change the user name and password of the camera, and set the IR led lights mode, wireless settings, PTZ, motion detection.
- Delete: You can also tap "Delete" to remove the device.

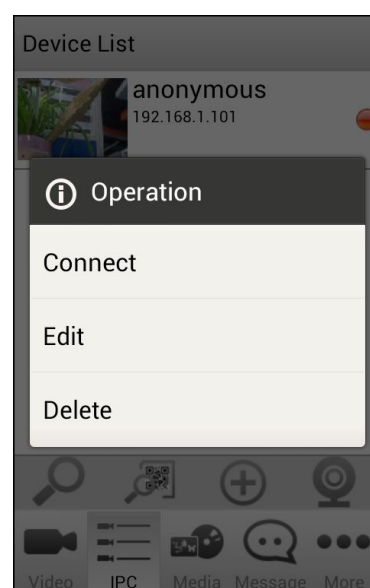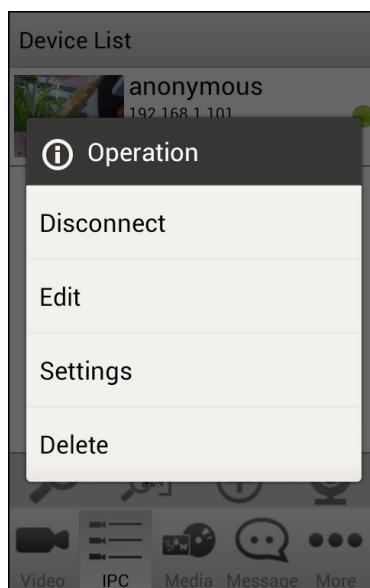

5.5 Foscam Demo



Click icon  , You can add the Foscam Demo to IPC list directly, and check the live video on your phone, you don't need to input username or password.

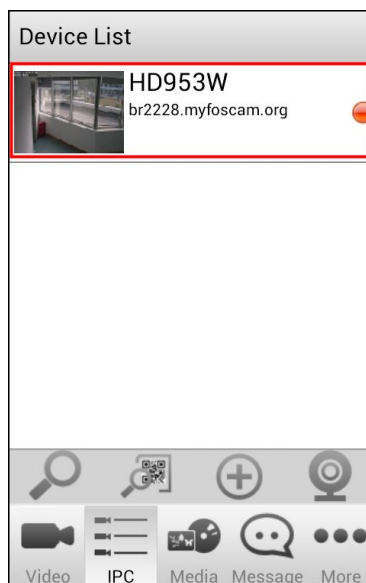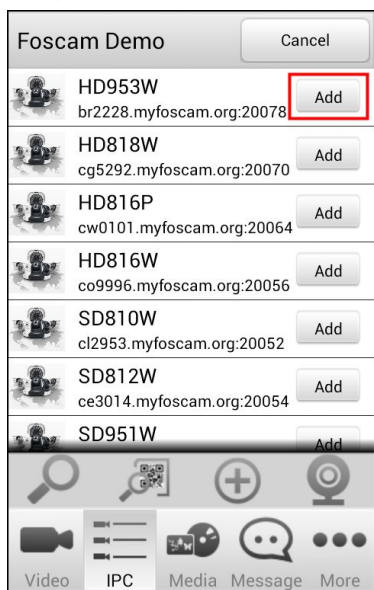


6 Video

6.1 View Camera Video


Tap the **Video** icon on the bottom, you can go to live video page. Tap the icon on the upper-right corner, you can switch single and four-channel display.

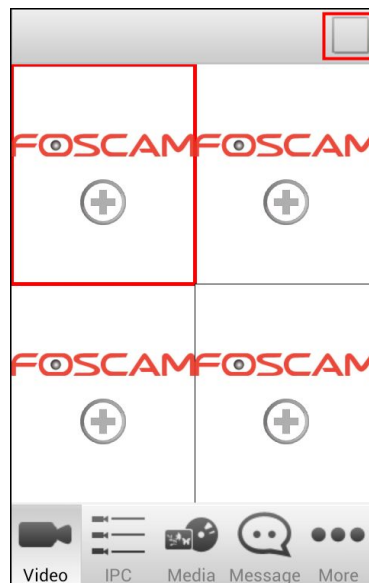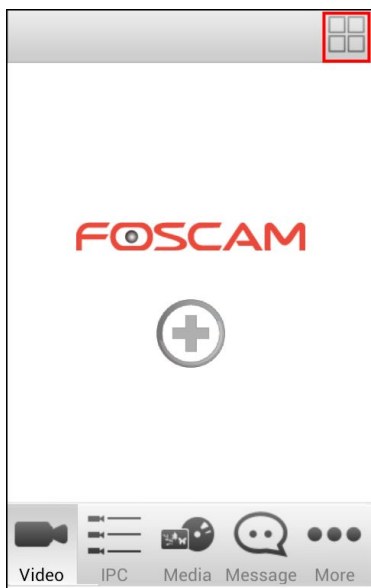

Tap the "+" button, you can add camera which have been added.

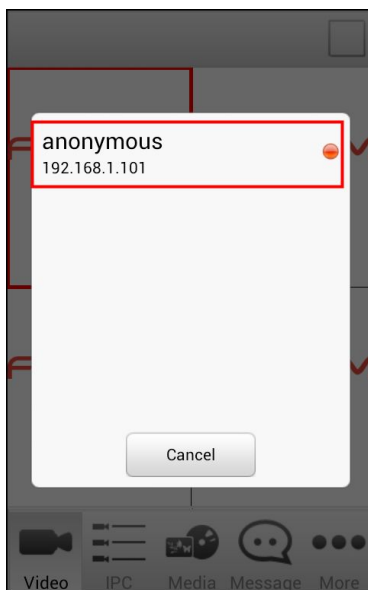


After connecting the camera is successful, the camera video will appear.

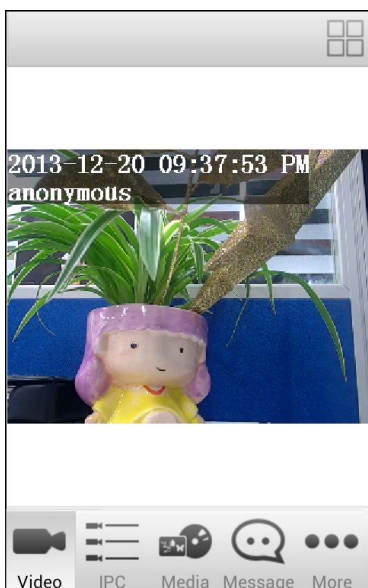

In four-channel mode, double tap the video can switch to single channel mode, double tap again, you can enter the full screen mode. In video page, place your phone in landscape mode, you can enter full screen mode, place your phone in portrait mode to exit full screen mode.

6.2 Set the Video Operation

Tap the live video and the operation button will pop up.

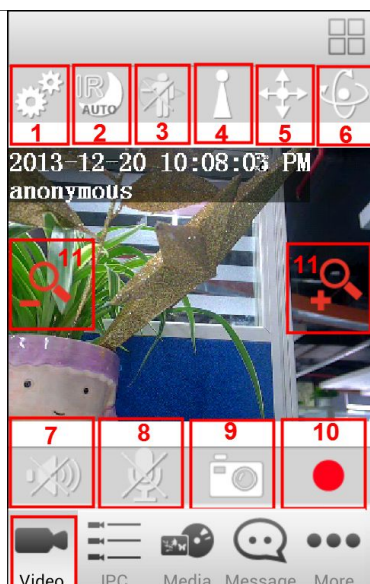


The video interface supports the following functions:


1 : Configure the camera

It contains **IR LED Lights Mode**, **Modify the Username/Password**, **Wireless Settings**, **PTZ** and **Motion detection**. Please refer to the “6.3 Configure the camera”.

2 : Turn on/off IR Light

Click icon , the **Device Settings** page will display. There are two modes to adjust the infrared led: Auto and Manual.

When the **IR LED Light Mode** is **Manual** mode on the **Device Settings** page, you can


click icon  to turn on or turn off the infra led manually on the Video page.


3 : Enable/Disable Motion Detection




You can enable or disable motion detection. The operation of the motion detection, please refer to the “6.3.4 Motion Detection”.

4 : Preset



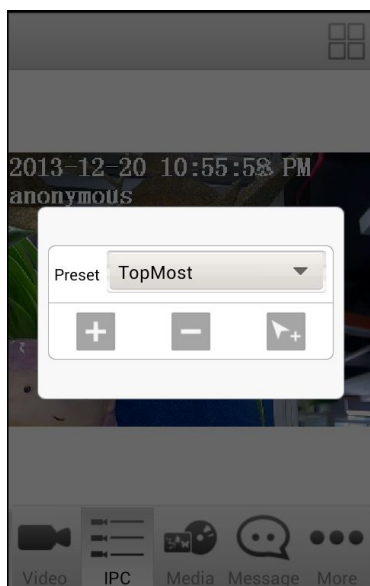

Some products support Preset function.

Click icon , you can add or delete the preset of the camera. And make the camera go to the preset position.



-  **Add Preset:** Move the camera and stop at a desired place where you want make preset position. Click  button and enter a descriptive name for the preset position. Then click  to save it.




-  **Go to the Preset:** Select one preset position in the preset drop-down list and click  to make the camera move the preset position.
-  **Delete Preset:** Select one preset position and click  to delete it.


NOTE:

The default preset can not be deleted.

5  : PTZ


Some products support PTZ function.


Click the icon , then click on the arrow keys to operate the camera.

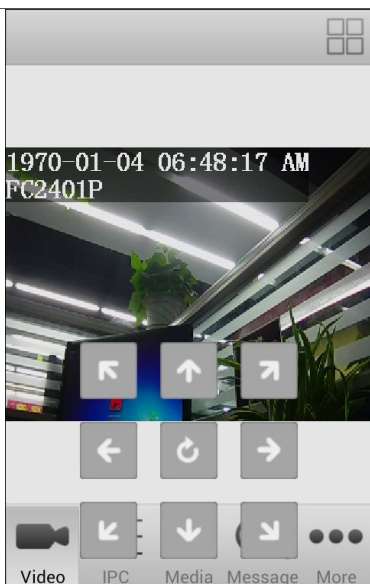


6  : Cruise Track



Some products support cruise track function.

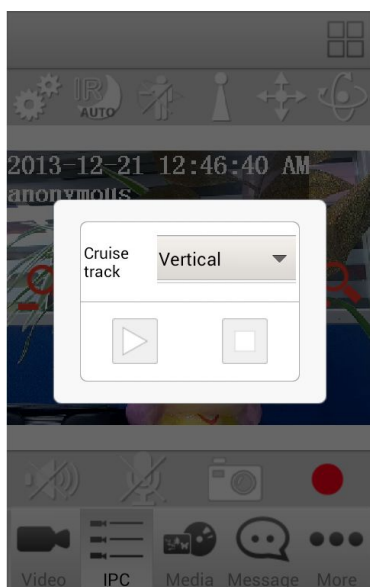Click icon , you can select the cruise track.





Select one track in the track drop-down list. Click  button, the camera will cruise following the predefined path. Click stop button and finish cruising.

7  : Audio

Click icon , the icon will become to , you can hear the sound around the camera by the earphone or speakers that connected with PC.

Some products support Audio function.

8 : **Talk**


Click icon  and the icon will become to , then talk to the microphone that connected with PC, people around the camera can here your voice. Click the icon again and stop talking. Some products support Talk function.


9 : **Snapshot**

Click it to make snapshot and it pop-up a window which picture you snapshot, right click in the window and save the picture to anywhere you want.

The picture of the snapshot will be stored in the “Media > Snapshot”.

10 : **Recording**

Click icon  and the camera start recording.



Click icon  and the camera stop recording.

The default storage path is “Media > Video Record”.

11  : **Zoom**






Some products support zoom function.

You can make digital zoom by pinch-to-zoom.

- Tap the  button on the right to magnify image.
- Tap the  button on the left to Reduced image.


12 : **Play nursery rhymes**

The Fosbaby machine supports this function.

Click the icon , then click the icon  to play the nursery rhymes, click the icon  to stop the nursery rhymes, click the icon  to play the previous song, click the icon  to play the next song.

6.3 Configure the camera

Click icon , the “Device Settings” page will display.

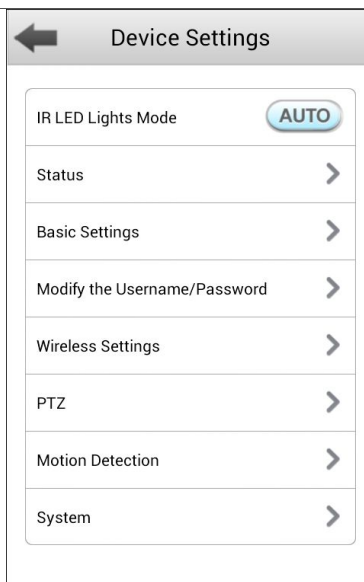


6.3.1 IR LED Lights Mode

On the **Device Settings** page, you can set infrared led mode: Auto and Manual.


: Auto mode, select it and the camera will adjust the infra led (on or off) automatically.

: Manual mode, select it and you can turn on or turn off the infra led manually by icon

 the on the Video page.


6.3.2 Status

Click **Status** to enter the **Status** page, you can see the Device Information, Device Status, Session Status and Log of the IP Camera.

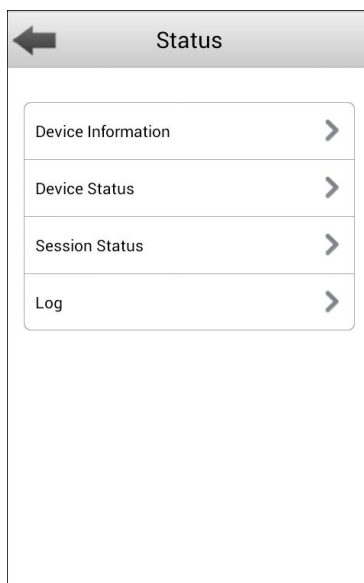


6.3.3 Basic Settings

Click **Basic Settings** to enter the **Basic Settings** page, you can change the Camera Name and Camera Time of the IP Camera.

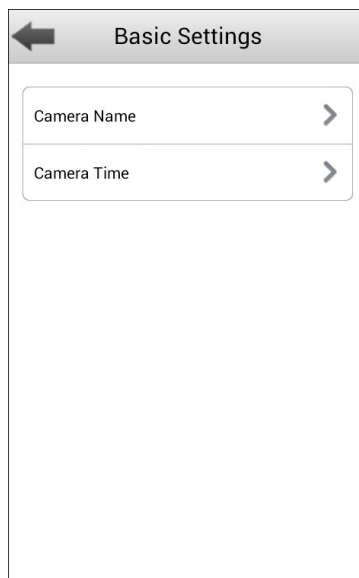

6.3.4 Modify the Username/Password

Click **Modify the Username/Password**, you can change username and password of the camera.

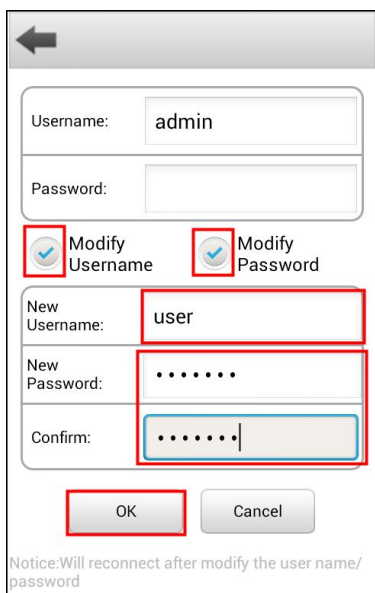


6.3.5 Wireless Settings

Click **Wireless Settings**, you can set wireless connection of the IP Camera.

Click the **Scan** button and the camera will detect all wireless networks around the area. It should also display your router in the list.

Click the SSID (name of your router) in the list, the corresponding information related to your network, such as the name and the encryption, will be filled into the relevant fields automatically.


You will only need to fill in the password of your network. Make sure that the SSID, Encryption and the password you filled in are exactly the same for your router.

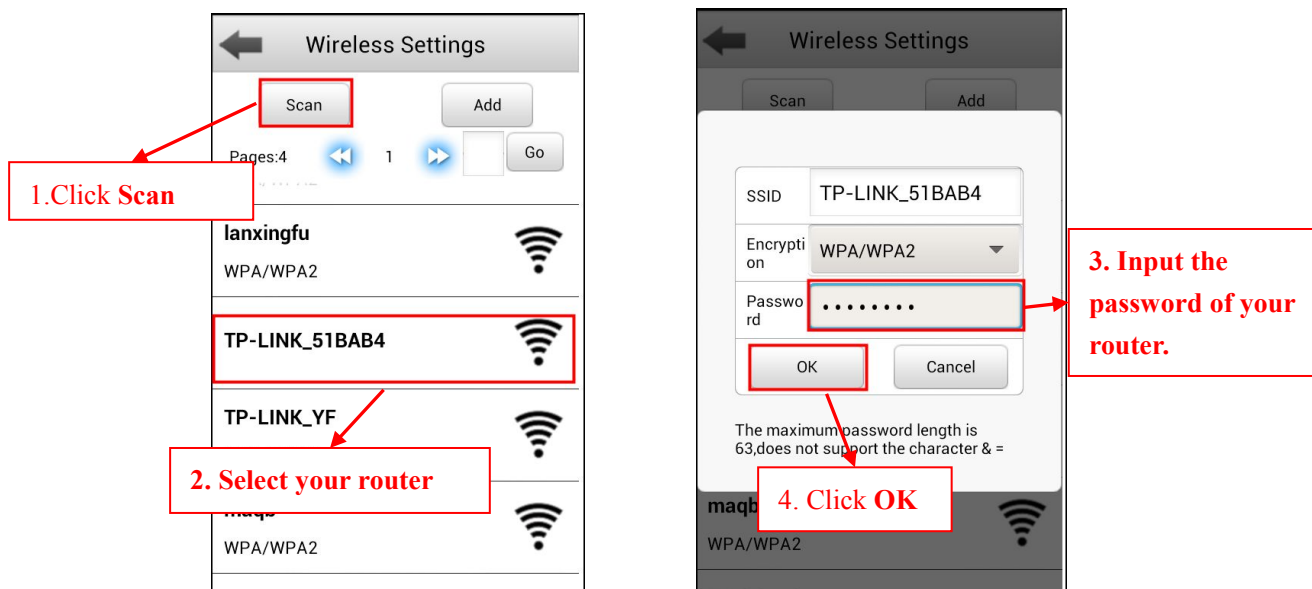

If you can not search you need to connect to a wireless network, you can by clicking on the **Add**, manually add the wireless network settings.

6.3.6 PTZ

Click **PTZ**, you can set the **PTZ Speed**, **Start-Up-Option** and **Cruise Settings** of the camera.

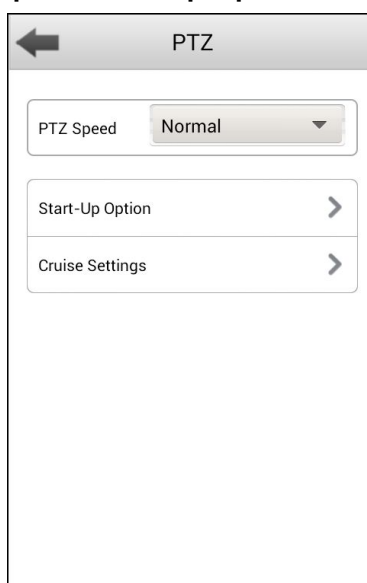


PTZ Speed

There are five PT speed types: very fast, fast, normal, slow and very slowly. Select the desired PTZ speed type.

Start-Up-Option

It supports three modes: Disable Start-Up, Go To Home Position and Go To Preset Point.


- Disable Start-up: When rebooting, the camera will not pan/tilt.
- Go To Home Position: When rebooting, the camera will pan/tilt and stops at center.
- Go To Preset Position: Select one preset position and save it. When rebooting, the camera will pan/ tilt and stops at the preset position you have set.

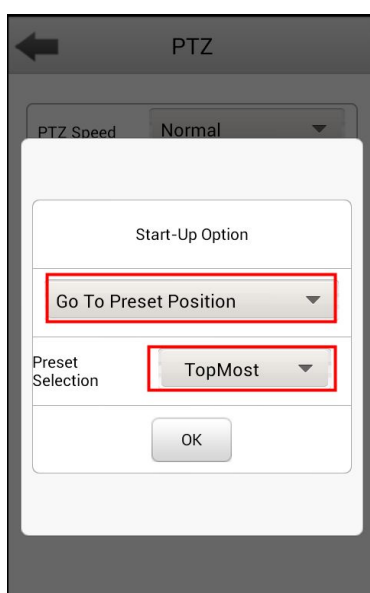

Cruise Settings


You can add/ delete/ alter one cruise track.

You can click the icon  to take effect on the Video page.

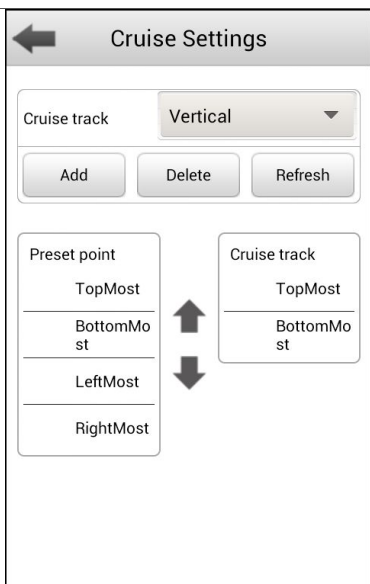


● Add Cruise Track

Click Add button and enter a descriptive name to identify the cruise track.


On the lower left of the page, you can see all preset points you have added. Select one preset point and click  button, you can see the preset point has been added to the cruise track on the cruise track page. You need to add two or more preset points to the cruise track.

Click **OK** button and the cruise track will take effect.

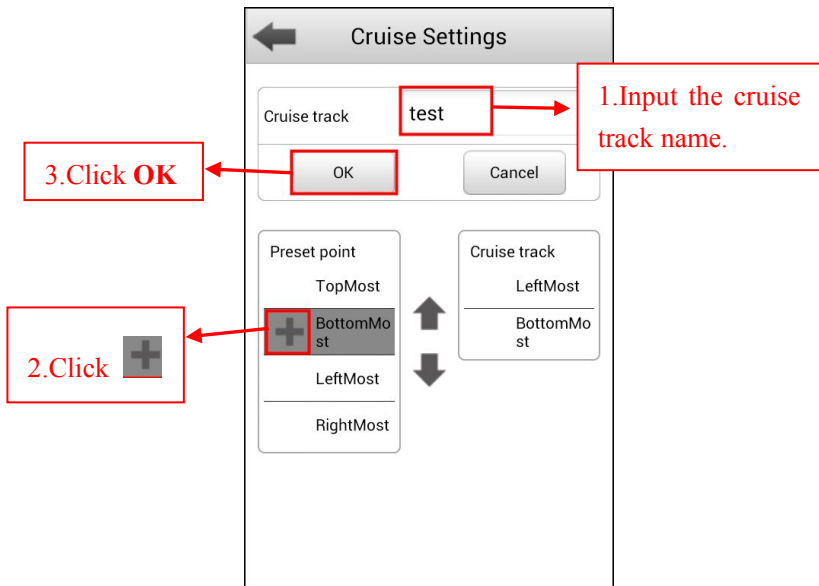

● Check Cruise track

After add the cruise track, you can see all cruise tracks you have added from the **Cruise track** dropdown.

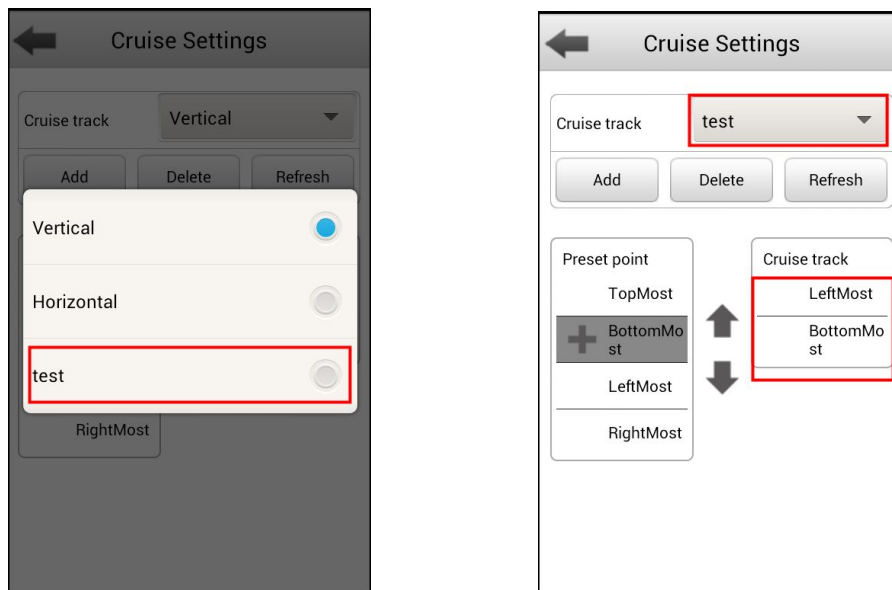

- Delete Cruise Track

Select one cruise name you have added, click **Delete**.

- Refresh Cruise Track


Click **Refresh** to achieve cruising track set up mobile terminal and PC synchronization.


6.3.7 Motion Detection

If the IP Camera supports **Motion Detection Alarm**, you can set motion detection.

You can configure alarm information.


Only select the **Take Snapshot**, the **Time Interval** only needs to be configured.

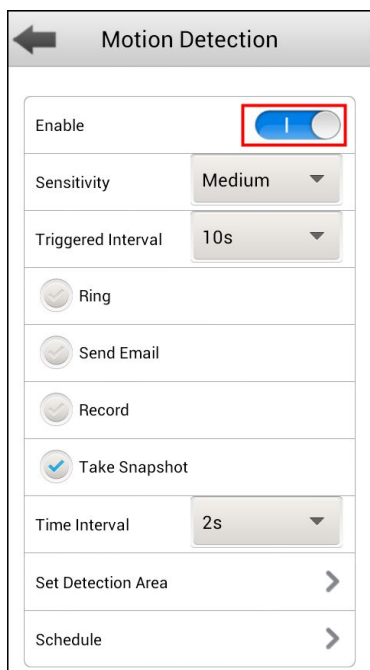

After configuration is complete, click on the icon  will pop up a message box to confirm the save. Click "OK" to save the information.

6.3.8 System


Click **System** to enter the **System** page, you can set the **Factory Reset** and **Reboot** of the IP camera.

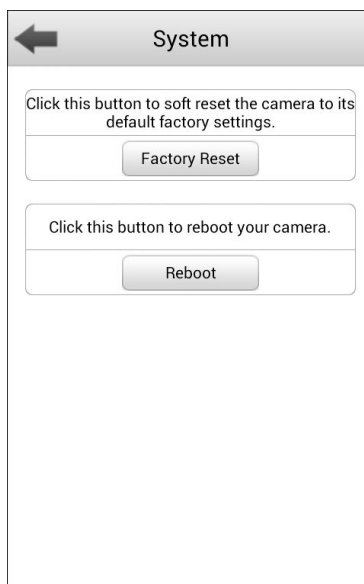

7 Message

Tap the "Message" on the bottom to enter **Message** page.


You can see the system message and alarm message of the IP Camera.

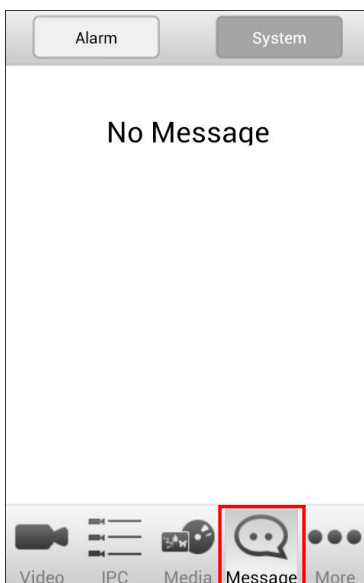

8 Media

Tap the **Media** on the bottom to enter file browsing page. Tap the **Modify Path**, you can modify the image and video storage directory. Snapshot store the captured pictures, in jpg format.

Video Record store video recording files, in avi format.

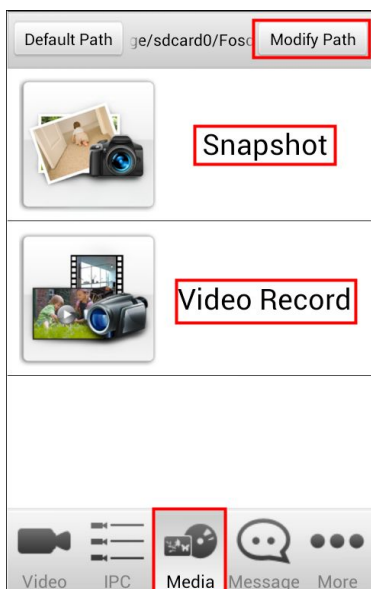

9 Others


Tap **More** on the bottom to get more information about the App.

Settings

Tap "Settings", you can enable/disable "Only connect in Wi-Fi network". It is enabled by default to avoid too much mobile data in 3G/LTE network.

You can enable/disable **Enable Push Message Sound Notification**.

Click the **Share Management**, you can share your snap picture.

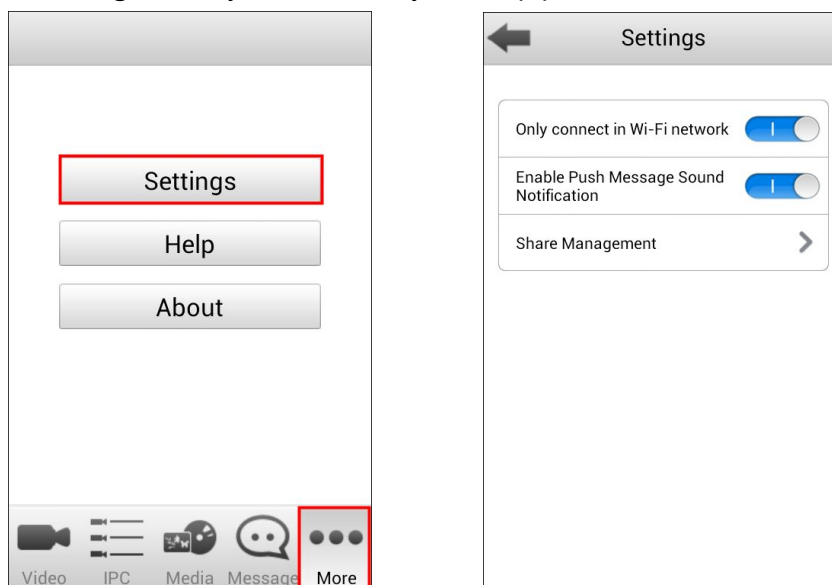

Help

Tap **Help**, you can see the help info showed when the App run at first time.

About FOSCAM App

Tap **About**, you can get the software version information. When the App has update version, the Google Play will remind you.

10 Technical support

If you have problems with your Foscam IP camera, please contact the Foscam reseller you purchased from, or you can e-mail the Foscam headquarter technical support team:

tech@foscam.com .

Your valuable comments and suggestions on improving Foscam products are welcomed!