



## INSTALLATION INSTRUCTIONS FOR PART 99-8903B

### APPLICATIONS

## **SUBARU LEGACY & OUTBACK 2010-11**

**(FOR NON-NAVIGATION RADIOS ONLY)**

# 99-8903B


### KIT FEATURES

- DIN radio provision with pocket
- ISO radio provision with pocket
- Painted scratch resistant matte black




### KIT COMPONENTS

A) Radio Housing B) ISO Brackets C) Trim plate



A



B



C

### WIRING AND ANTENNA CONNECTIONS (Sold Separately)

#### Wiring Harness:

- 70-8901 Subaru Harness 1990-Up
- 70-7552 Nissan Harness 2007-Up

#### Antenna Adapter:

- 40-SB10 Subaru Antenna Adapter 2005-Up

### TOOLS REQUIRED:

- Small Flat Blade Screwdriver
- Phillips Screwdriver
- Panel Removal Tool
- Socket Wrench



**METRA. THE WORLD'S BEST KITS.™**



**1-800-221-0932**



**www.metraonline.com**

© COPYRIGHT 2007-2010 METRA ELECTRONICS CORPORATION



**TABLE OF CONTENTS**

**Dash Disassembly**

- 2010-11 Subaru Legacy ..... **1**
- 2010-11 Subaru Outback ..... **1**

**Kit Assembly**

- DIN Head Unit Provision ..... **2**
- ISO DIN Head Unit Provision ..... **3**

**\*Note:**

**Refer also to the instructions included with the aftermarket radio.**



**KNOWLEDGE IS POWER**


Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto [www.installerinstitute.com](http://www.installerinstitute.com) or call 800-354-6782 for more information and take steps toward a better tomorrow.



Metra recommends MECP certified technicians.



**2010-11 SUBARU LEGACY / OUTBACK**

- 1** Disconnect the negative battery terminal to prevent an accidental short circuit.
- 2** Unclip and remove the radio trim panel including the a/c vents. (Figure A)
- 3** Remove (4) Phillips screws securing the factory radio.

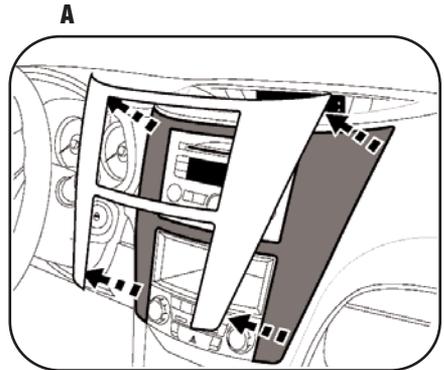



**2010-11 SUBARU LEGACY / OUTBACK****DIN HEAD UNIT PROVISION**

- 1** Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter from Metra or AXCESS. Re-connect the negative battery terminal and test the unit for proper operation.
- 2** Slide the DIN cage into the Radio Housing and secure by bending the metal locking tabs down. (Figure A)
- 3** Slide the aftermarket head unit into the cage and secure. (Figure B)
- 4** Reassemble dash in reverse order of disassembly.

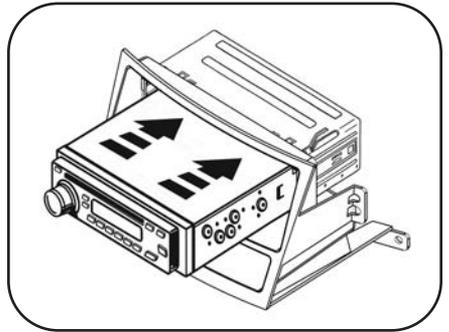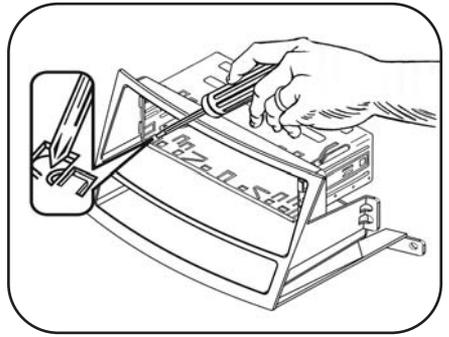

**2010-11 SUBARU LEGACY / OUTBACK****ISO DIN HEAD UNIT PROVISION**

- 1 Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter from Metra or AXCESS. Re-connect the negative battery terminal and test the unit for proper operation.
- 2 Mount the ISO Brackets to the head unit with the screws supplied with the unit. (Figure A)
- 3 Slide the head unit into the radio opening until the side clips engage. (Figure B)
- 4 Snap the Trim plate into the Radio Housing. (Figure B)
- 5 Reassemble dash in reverse order of disassembly.

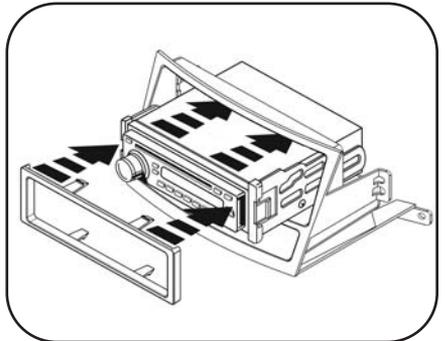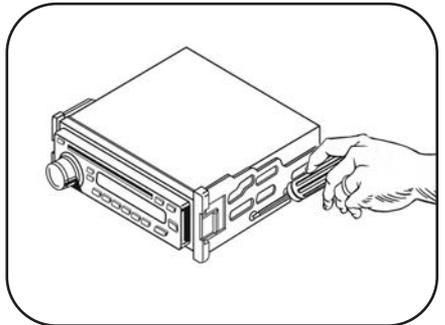





# 99-8903B INSTRUCTIONS

**METRA. THE WORLD'S BEST KITS.™**



**1-800-221-0932**



**[www.metraonline.com](http://www.metraonline.com)**

REV. 11/18/10 © COPYRIGHT 2003-2010 METRA ELECTRONICS CORPORATION INST99-8903B