


Simplicity

LIGHT KIT Mfr's No. 366

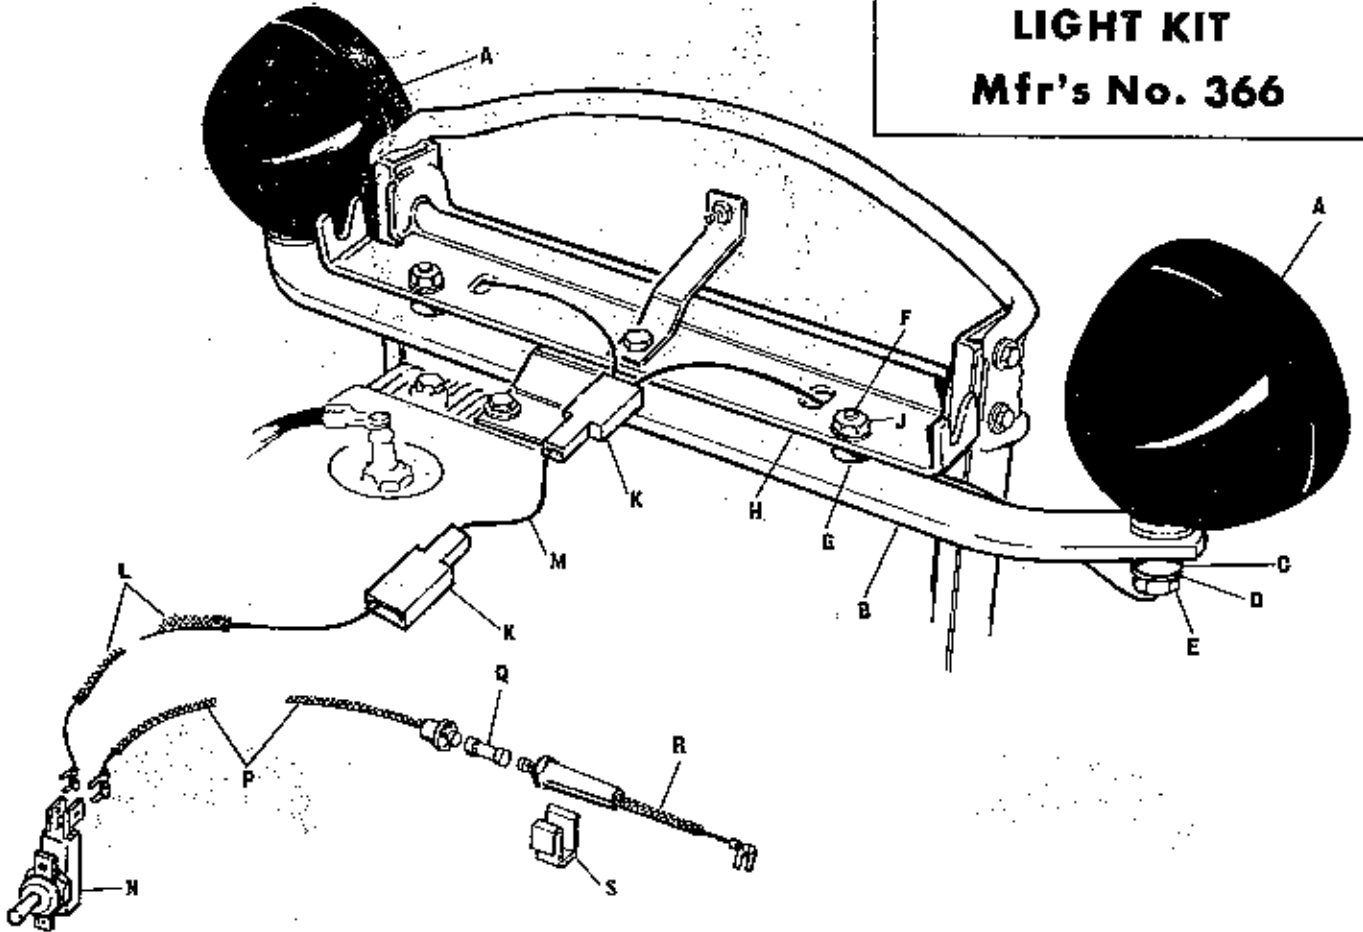

1. Remove Hood and Battery.
2. Drill 1/2" hole (3" in from right edge and 1-5/8" down from crown of dash assembly) or punch out "Knock-out" in dash and install toggle switch (122184).
3. Before beginning to install the light kit, study the above illustration and identify all of the parts. Remove grill brace bolt and install so bolt head is on bottom. Attach the light support hex cap screws, 5/16"-18 x 1-1/2" lg. with two 5/16" lock washers and two 5/16"-18 hex nuts and two spacers as shown. Tighten securely until 8161215 spacers are tight.
4. Remove all paint from the immediate area around the two lamp mounting holes on the light support and mount the lamps to the support with a spacer between the lamp support and nut. Fasten securely with a 1/2"-13 hex nut and lockwasher.
5. Attach the terminals of the lamp wires to the connector. Attach the extension wire (122185) between the two connectors. Remove the wire clamp near the front left corner of the gas tank and install the clamp (122186) furnished with the light kit. Install the wire (122176) from the connector, through the wire clamp and around the gas tank to the toggle switch (122184).

Ref. Let.	Part No.	Description
A	122175	Lamp Assembly
B	122152	Light Support
C	122053	Spacer
D	720004	Lock Washer, 1/2"
E	717006	Full Hex. Nut, 1/2"-13
F	705007	Hex. Cap Screw, 5/16"-18x1-1/2"
G	8161215	Spacer
H	720001	Lock Washer, 5/16"
J	717001	Full Hex. Nut, 5/16"-18
K	122182	Insulated Connector
L	122176	Wire (switch to connector)
M	122185	Extension Wire
N	122184	Toggle Switch (with hardware)
P	122178	Wire (fuse to switch)
Q	122172	Fuse 20 Amp.
R	122177	Wire (fuse to voltage reg.)
S	122186	Clamp

OVER

SIMPLICITY MANUFACTURING COMPANY

PRINTED IN U.S.A.

TP1274

37/4500
37/4500

