



Instruction Manual

**1T-DA-654, 1T-DA-664, 1T-DA-658
HDMI V1.3 Distribution Amplifiers**

Table of Contents

1.0	Introduction	2
2.0	Specifications	4
3.0	Checking Package Contents	5
4.0	Connecting the Hardware	5
5.0	Operating The Unit	7
6.0	Troubleshooting	8
7.0	Limited Warranty	8
8.0	Regulatory Compliance	9
9.0	Contact Information	10

1.0 INTRODUCTION

The 1T-DA-654, 1T-DA-664 and 1T-DA-658 HDMI Distribution Amplifiers provide multiple outputs from a single HDMI input for distribution to devices capable of receiving and/or displaying such signals. The 1T-DA-654 provides 4 HDMI compliant outputs, the 1T-DA-658 provides 8 HDMI compliant outputs and the 1T-DA-664 provides 4 HDMI compliant outputs plus 8 standalone audio signals available—1x4 analog stereo and 1x4 S/PDIF coaxial audio. Each product in this series is compatible with HDMI v1.3 specifications; a cutting-age technology that supports Deep Color (10-bit and 12-bit) video plus new, lossless Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio digital audio. In addition, all devices exhibit high bandwidth (up to 225MHz - 2.25Gbps) and they provide signal amplification and equalization for high performance processing of audio and video allowing the signals to travel great distances without quality loss. As a bonus feature, all HDMI outputs can also be cascaded.

Our professional video conversion products have been serving the industry for over twenty years. TV One offers a full line of high quality Seamless Switchers, Video Scalers, Up/Down/Cross Converters, Analog-Digital Converters (SD/HD-SDI, HDMI, DVI), Format Converters, Standards Converters, TBC/Frame Synchronizers, Matrix Routing Switchers, Signal Distribution Amplifiers and Cat.5 Transmission Systems.

1.1 Liability Statement

Every effort has been made to ensure that this product is free of errors. TV One cannot be held liable for the use of this hardware or any direct or indirect consequential damages arising from its use. It is the responsibility of the user of the hardware to check that it is suitable for his/her requirements and that it is installed correctly. All rights reserved. No parts of this manual may be reproduced or transmitted by any form or means electronic or mechanical, including photocopying, recording or by any information storage or retrieval system without the written consent of the publisher.

TV One reserves the right to revise any of its hardware and software following its policy to modify and/or improve its products where necessary or desirable. This statement does not affect the legal rights of the user in any way.

All third party trademarks and copyrights are recognised. The TV One logo, AV Toolbox logo, TV One-task and CORIO are the registered Trademarks of TV One. All other trademarks are the property of their respective holders.

1.2 Features

- HDMI 1.3, HDCP 1.1 and DVI 1.0 Compliant
- Allows distribution of 4 or 8 Outputs (1T-DA-654 and 1T-DA-658)
- Provides 1x4 Analog Stereo and 1x4 S/PDIF Audio Distribution (1T-DA-664)
- Supports Dolby Digital +, Dolby® Digital TrueHD and DTS-HD Audio
- Supports 10/12 bit Color Depth Display
- Supports PC resolutions to 1920x1200
- Supports HDTV resolutions to 1080p
- Supports SDTV resolutions of 480i and 576i
- Supports DVI when using Optional HDMI to DVI Adaptors
- Signal Equalization feature enables longer cable runs
- Supports Automatic Discovery of Monitor EDID

1.3 Getting the Best Results

There are many factors affecting the quality of results when distributing HDMI type signals. Some basic precautions will ensure the best possible performance from your new HDMI DA.

- **Output display device** – The quality of the output signal will depend largely upon the type and quality of the HDMI display device used. For instance, some video projectors just look better than others.
- **Distance between the DA sources and the display** – This plays a major role in the final result. Long distances are possible, but special measures should be taken in order to avoid cable losses. These include using high quality cables. Line amplifiers may also be necessary for the longest runs.
- **Input/Output connection cables** – Low quality cables are susceptible to interference. They degrade signal quality due to poor matching and can cause elevated noise levels. Cables should be of the best quality.
- **Interference from nearby electrical devices** – These can have an adverse effect on signal quality. For example, an older computer monitor often emits very high electromagnetic fields that can interfere with the performance of video equipment in its proximity.

2.0 SPECIFICATIONS

Video Inputs	
HDMI (All Models)	1x via HDMI Connector
Video Output	
HDMI	4x via HDMI Connector (1T-DA-654 & 1T-DA-664) 8x via HDMI Connector (1T-DA-658)
Audio Output	
HDMI Embedded Audio I/O	HD-Audio, including Dolby® TrueHD & DTS-HD
Analog Stereo	4x via Stereo 3.5mm (1T-DA-664)
S/PDIF	4x Via S/PDIF RCA Coaxial (1T-DA-664)
Audio Bandwidth	20Hz to 20 KHz
Audio Impedance	20KΩ Stereo, 75Ω Coaxial S/PDIF (1T-DA-664)
Audio Levels	Unity, Nominal, S/PDIF .5-1V p-p (1T-DA-664)
General	
Frequency Bandwidth	2.25Gbps (Single Link)
Color Depth	10/12 bit Color Depth Display
Supported PC/DVI resolutions	Up to 1920x1200
Supported HDTV Formats	480i, 480p, 576i, 576p, 720p, 1080i and 1080p
Compliance	HDMI V1.3, HDCP V1.1, DVI V1.0
Signal Equalization	Internal
Maximum Distances	
Source to DA	20m (60') for 1080p/8-bit, 15m (45') for 1080p/12-bit
DA to Display	15m (45') for 1080p/8-bit, 10m (30') for 1080p/12-bit
Warranty	
Limited Warranty	3 Years Parts and Labor
Mechanical	
1T-DA-654/664 (H-W-D)	41.5x218x147mm (1.6x8.6x5.8")
1T-DA-658 (H-W-D)	44x436x160mm (1.75"19.0"x6.3")
1T-DA-654/664 Weight	0.85 kg (1.88lbs)
1T-DA-658 Weight	2 kg (4.4 lbs)
Environmental	
Operating Temperature	0° to +50°C (+32° to +122°F)
Operating Humidity	10% to 90%, Non-condensing
Storage Temperature	0° to +50°C (+32° to +122°F)
Storage Humidity	10% to 90%, Non-condensing
Power Requirement	
External Power Supply	5VDC@2A (5VDC@5A 1T-DA-658)
Regulatory Approvals	
HDMI DAs	FCC, CE, RoHS
Power Supply	UL, CUL, CE, PSE, GS, RoHS
Accessories Included	
1x AC Power Adapter	US, UK or Euro
1x Instruction Manual	
Optional Accessories	
RM-220	For 1T-DA-654/664 (Single/Dual)
RM-380S	For 1T-DA-658 (Single)
Product Item Numbers	
1T-DA-654	1x4 HDMI DA
1T-DA-654	1x4 HDMI DA with Separate Audio
1T-DA-658	1x8 HDMI DA

3.0 CHECKING PACKAGE CONTENTS



Before attempting to use this unit, please check the packaging and make certain the following items are contained in the shipping carton:

- 1x 1T-DA-654, 1T-DA-664 or 1T-DA-658 HDMI DA
- 1x 100~240VAC to 5VDC Power Adapter
- 1x Instruction Manual



Note: Please retain the original packing material should the need ever arise to return the unit. If you find any items are missing, contact your reseller or TV One immediately. Have the Model Number, Serial Number and Invoice available for reference when you call.

4.0 CONNECTING THE HARDWARE


Connect the HDMI Video Source to the input of the 1T-DA-654, 1T-DA-664 or 1T-DA-658 Distribution Amplifier, connect its outputs to a HDMI Compliant devices or monitors and lastly connect the AC to DC Power Adapter. The drawings below show the locations of the input, outputs and power connector.

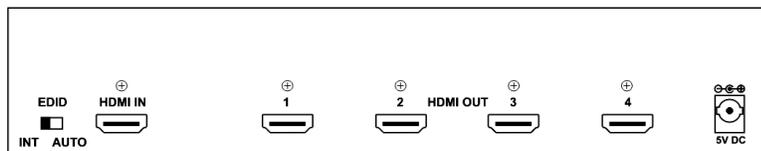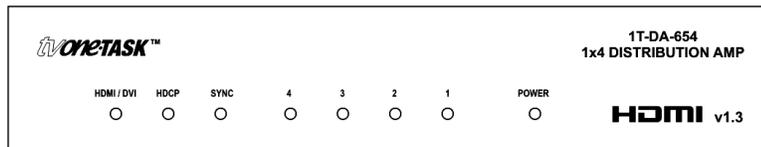

1T-DA-654 1x4 HDMI DA

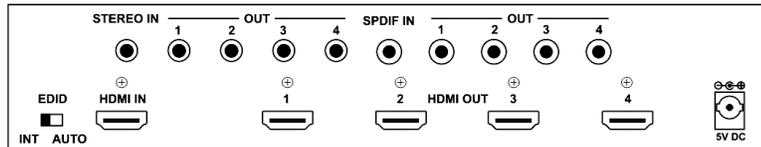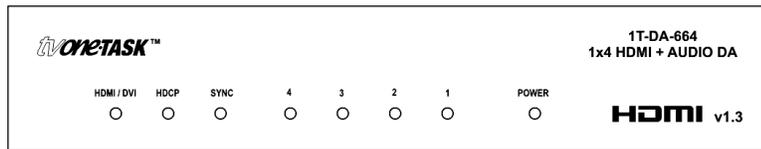

1T-DA-664 1x4 HDMI DA with Audio

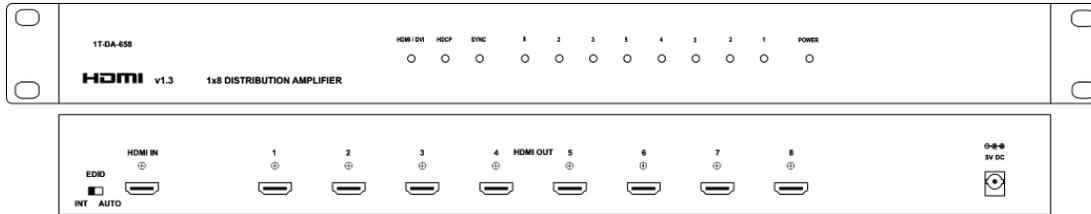

1T-DA-658 1x8 HDMI DA

4.1 Connecting the Inputs to the Distribution Amplifiers

You can connect any HDMI compliant device's output to the HDMI input. Make certain that the HDMI cable is securely plugged into the source device as well as the HDMI DA. Always use a high quality cable, as short a length as possible, for best results.

4.2 Connecting the Outputs to the Destination Devices

Using a high quality HDMI cable, connect the output of the HDMI DA to an HDMI compliant display device. Use the shortest cable run possible.

4.3 Connecting the Audio I/O (1T-DA-664 Only)

Connect S/PDIF audio from the source device to the 1T-DA-664's S/PDIF input and then connect the S/PDIF outputs from the 1T-DA-664's RCA connector(s) to the destination devices. If the destination devices can accept only analog stereo audio, connect stereo audio to the 1T-DA-664's input and then to the device's inputs using the 3.5mm connectors.

4.4 Connecting Power

All units are shipped with a Power Adapter to convert 100~240VAC@50-60Hz to 5VDC. Connect the DC Output Cable from the Power Adapter to the back of the unit and then plug the Power Adapter into an AC Receptacle. There is no power switch. The unit begins to function as soon as it is plugged into AC.

4.5 Using the Positive Cable Securing Feature

If HDMI cables are used that are equipped with Locking type connectors, an added step is necessary. Remove the Philips head screws from the rear of the unit just above the HDMI connectors and replace them with the Hex Nut/Screws that came in the DA's accessory pack. After screwing these into the threaded holes vacated by the Philips head screws, the Hex Nut provides a threaded receptacle for the screw that is part of the locking HDMI connector on the cable. Plug in the cable's Locking HDMI connector and secure it to the unit with its integral screw. This fastens the cable to the unit and prevents its inadvertent removal.

4.6 Optional Rack Mount Kit

The Distribution Amplifiers can be mounted in a standard 19" equipment rack. To mount either the 1T-DA-654 or 1T-DA-664 in a rack, the optional RM-220 Rack Mount kit must be purchased. Using this kit, either model can be mounted in the rack. A blank panel is provided when only unit is mounted in the frame. It's also possible to mount one of each model or two of the same model in the frame. To mount the 1T-DA-658 in a rack, the optional RM-380S Rack Ears must be purchased. Attach these to the sides of the unit for installation into a 19" rack.

5.0 OPERATING THE HDMI DISTRIBUTION AMPLIFIERS

Once the input, output and power cables are connected, plug the AC adaptor into the wall and the Distribution Amplifier will begin to function. A Power LED on the front of the unit will confirm power is present. Other than connecting cables and applying power, there are no other operator interventions required with the possible exception of the EDID jumper.

EDID Operation:

On the rear of the unit you'll find an EDID* Jumper. This jumper controls whether the DA determines the connected device's EDID Number automatically or uses an internal information table.

The default factory setting for the EDID Control Jumper is **AUTO** and you should leave it as it is if the display is operating properly. Switch to **INT** (Internal) to use build-in EDID information table should the display have problems. When the EDID control jumper in AUTO position, the unit will detect the first HDMI output display's EDID and record the value in the DA. If the first detected output display is DVI, it will pass to next display in sequence until the first HDMI compliant device has been detected.

If the DA cannot reliably determine the destination device's EDID number through the handshake routine, switching to the internal table (INT) allows the DA to run through a range of pre-defined resolutions and refresh rates so that a reliable connection can be made.

** The Extended display identification data (EDID) is a data structure provided by a computer display to describe its capabilities. It's what enables the TV One OneTask HDMI DA to know what kind of monitor is connected to the unit. EDID is defined by a standard published by the Video Electronics Standards Association (VESA). The EDID includes manufacturer name, product type, phosphor or filter type, timings supported by the display, display size, luminance data and (for digital displays only) pixel mapping data.*

Operation Notification LEDs

Besides the Power LED, there are status LEDs as well as other LEDs showing the unit's condition with respect to successfully executed output connections.

At the lower left, there are three LEDs which show signal format status. The first (or left-most) LED shows whether an HDMI or DVI signal is being received. Next to that LED, another LED shows if the signal is encoded with HDCP (High Definition Content Protection) signals and a third LED shows if the HDMI signal has synchronized. There are also LEDs for each output which show whether or not the output has successfully made a connection with the destination device.

6.0 TROUBLESHOOTING

In the event of problems, first make certain that the input and output cables are no more than 30 meters long (for signals to 1080p resolution) and are of the highest possible quality. Next, make certain that the Distribution Amplifier is receiving power.

If all is well in these areas, remember that HDMI devices communicate with one another so the source devices and destination device must be fully HDMI capable. In addition, HDCP encryption requires additional processing which also is dependent on the equipment you have connected to the sources and destination device. If you experience problems using the 1T-DA-654, 1T-DA-664 or 1T-DA-658 HDMI Distribution Amplifier, you should attempt to determine what is wrong by attaching each of the source devices – one at a time – directly to the destination device using the same cables you are using with the expanded system. This is a way of determining if the problem is due to bad cables or a problem with the other devices. If you are unable to obtain a signal using this simplified path, suspect the cables, the source device or the destination device.

After trying the above suggestions should the problem still persist, contact your dealer for additional suggestions before contacting TV One. Should the dealer's technical personnel be unable to assist you, contact TV One via our support website: **<http://tvone.crmdesk.com>**. Create a technical support request on the site and our support team will respond within a short period of time.

7.0 LIMITED WARRANTY

TV One warrants the original purchaser that the equipment it manufactures or sells will be free from defects in materials and workmanship for a fixed term from the date of purchase. The warranty term for specific product lines is defined below.

1. TV One branded products based on TV One's CORIO technology are warranted for a period of five years from the date of purchase. This includes products with the model number prefix of C2, 1T-C2, CX, A2 or S2.

2. TV One-task branded products, other than those based on TV One's CORIO technology mentioned above, are warranted for a period of three years from the date of purchase. This includes products with the model number prefix of 1T, with the exception of 1T-C2.
3. LCD Monitors are warranted for a period of three years from the date of purchase, with the exception of the LCD panels integrated into the monitors that are supplied by third parties. LCD panels are limited to the term and conditions of the warranty offered by the respective LCD panel manufacturer. Such specific LCD panel warranties are available upon request to TV One.

Should a product, in TV One's opinion, prove defective within this warranty period, TV One, at its option, will repair or replace this product without charge. Any defective parts replaced become the property of TV One. This warranty does not apply to those products which have been damaged due to accident, unauthorized alterations, improper repair, modifications, inadequate maintenance and care, or use in any manner for which the product was not originally intended.

If repairs are necessary under this warranty policy, the original purchaser must obtain a Return Authorization Number from TV One and return the product to a location designated by TV One, freight prepaid. After repairs are complete, the product will be returned, freight prepaid.

LIMITATIONS - All products sold are "as is" and the above Limited Warranty is in lieu of all other warranties for this product, expressed or implied, and is strictly limited to two years from the date of purchase. TV One assumes no liability to distributors, resellers or end-users or any third parties for any loss of use, revenue or profit.

TV One makes no other representation of warranty as to fitness for the purpose or merchantability or otherwise in respect of any of the products sold. The liability of TV One with respect to any defective products will be limited to the repair or replacement of such products. In no event shall TV One be responsible or liable for any damage arising from the use of such defective products whether such damages be direct, indirect, consequential or otherwise, and whether such damages are incurred by the reseller, end-user or any third party.

8.0 REGULATORY COMPLIANCE

The 1T-DA-654, 1T-DA-664 and 1T-DA-658 HDMI Distribution Amplifiers have been tested for compliance with appropriate FCC and CE rules and regulations. The Power Adaptor/Supplies have been tested for compliance with appropriate UL, CUL, CE, PSE, GS Rules, Regulations and/or Guidelines. These Products and Power Adapters are RoHS Compliant.

9.0 CONTACT INFORMATION

Should you have questions or require assistance with this product in areas not covered by this manual, please contact TV One at the appropriate location.

TV One USA

2791 Circleport Drive
Erlanger, KY 41018
USA
Tel 859-282-7303
Fax 859-282-8225
sales@tvone.com
www.tvone.com

TV One Europe

Continental Approach
Westwood Industrial Estate
Margate, Kent CT9 4JG, UK
Tel +44 (0)1843 873311
Fax +44 (0)1843 873312
sales.europe@tvone.com
www.tvone.eu

TV One Latin America

6991 NW 82 Avenue #8
Miami, FL 33166
USA
Tel 305-396-6275
Fax 305-418-9306
sales.latinoamerica@tvone.com
www.tvonela.com

TV One Mercosur

Honduras 5849, 2nd Floor, Office C
(C1414BNI) Capital Federal
Buenos Aires, Argentina
Tel +54 11 4771-5570
Fax +54 11 4771-5570
sales.latinoamerica@tvone.com
www.tvonela.com

TV One Asia

11F, NO.28, Sec. 2
San-Min Rd, Panchiao City
Taipei Hsien 220
Taiwan R.O.C.
Tel +886 2 8951-0674
Fax +886 2 8951-0675
sales.asia@tvone.com
www.tvoneasia.com

TV One China

Room 1007, Golden Peach Building
No. 1900 Shangcheng Road
Pudong, Shanghai
China 200120
Tel +86 21 5830-2960
Fax +86 21 5851-7949
sales.china@tvone.com
www.tvonechina.com

End of Manual