


EIKI PLD-42U: 42", 852x480 Pixel Resolution Data/Video Plasma Display Panel

KEY FEATURES:

- Displays computer and video images on a 42" diagonal screen less than 6" thick.
- Produces a bright, flat, focussed, distortion-free, uniformly-illuminated picture.
- Emits light rather than reflecting it, minimizing the need for room light control.
- Provides a consistent 160° field of view: perfect for use in confined quarters.
- Full VGA: SVGA compatible. Normal (4/3) and Widescreen (16/9) video.

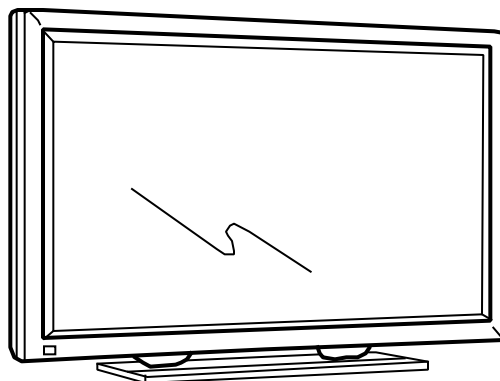

OTHER IMPORTANT FEATURES:

- *Electronic image scaling can automatically resize the incoming signal to fill the screen.*
- *An optional PCI graphics card and PC software can generate 852x480 pixel output.*
- *Included Accessories: Owner's Manual, Power Cord. "Note: Support System Not Included."*
- *Optional Accessories: Table-Top Stand; Horizontal Wall Mounts (choice of 0°, 5°, 10° or 15° tilt), Vertical Wall Mount (0° tilt), Adjustable Ceiling Mount, ATA-style Shipping Case, 852 x 480 PCI Graphics Card & Driver.*

PLD-42U SPECIFICATIONS:

Screen Size	42" diagonal
Aspect Ratio	16:9 (width:height)
Screen Dimensions (HxW)	20.4" x 36.2" (52cm x 92cm)
Resolution	852 x 480 = 408,960 pixels
Brightness	.250 cd/m ² (at 15% APL)
Color Palette	16.7 million
Viewing Angle	up to 160°, horizontally and vertically
Scanning	Auto: H Sync 15.73-37.9 kHz; V Sync. 50-75 Hz.
Image Scaling	resizing of input signal to 16/9 aspect ratio
Local Control	full function, on-board
Remote Control	full function, Infra Red
RS-232 Control Port	D-sub 9-pin connector
Computers Standards	Full VGA: SVGA compatible
Computer Inputs	HDB15 x 1
Video Formats	Normal (4:3); Widescreen (16:9)

SPECIFICATIONS (cont.)

Video Standards	NTSC, PAL, SECAM
Video Inputs	Composite: BNC x 1; Y/C: S-Video x 1
Audio Input	Stereo: RCA x 2 (L&R)
Audio Amplifier	Stereo: 2 watts RMS each side (L&R)
Built-in Speakers	Stereo: 2 (L&R)
Weight	.87 lbs. (39.5 kg)
Dimensions (HxWxD)	25.2" x 40.9" x 5.9" (64 x 104 x 15cm)
Power Requirements	100-240V AC, 50/60 Hz
Power Consumption	.350 watts
Power Cord	.10' (3M) Type 3, detachable
Safety Compliance	UL listed
Warranty	.1 Year (parts and labor to correct defects)

Specifications subject to change without notice.
©1997 EIKI International, Inc. Printed in the USA. 1/28/98

EIKI

Ā-Key to better communications.