

CM097-2-USB | Lighter Socket Mount with USB Power Connector




Package Contents:

(1) CM097-2-USB - Lighter socket mount with mini USB power

Specs: Input (12V - 24V) outlets, Output (5V, 500mA)


Make sure the power mentioned in the specs is compatible with your device prior to use.

 Do not place mount in or near an air bag deployment zone or where it will obstruct view of the road.

Mount Installation Instructions

Step 1. Insert the DC Power plug (A) completely into the vehicle's 12V - 24V / lighter socket.

Step 2. Adjust the angle of the pedestal arm by tightening the adjustment knob (B) to the desired placement angle.

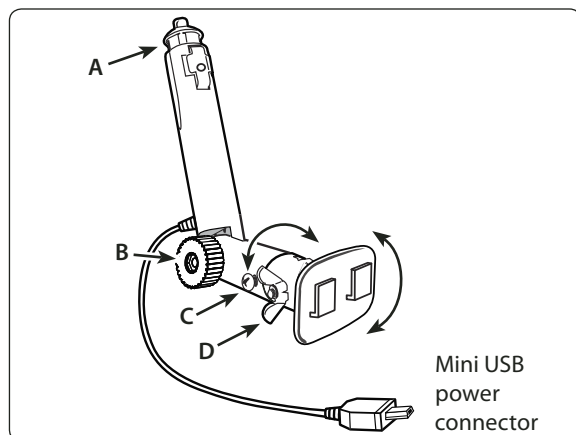


Step 3. If necessary, adjust the rotation of the mounting head by tightening the screw (C) with a screwdriver.

Step 4. Adjust the angle of the dual T-tab head by tightening the wing nut (D) to the desired mounting angle.

Dual T Device Attachment

Step 1. Attach the mini USB power connector (E) to the device's power socket (F).

Note: The mini USB power connector will only power / charge your device. Inserting the power connector in a mini USB sync port will not provide power to the device.

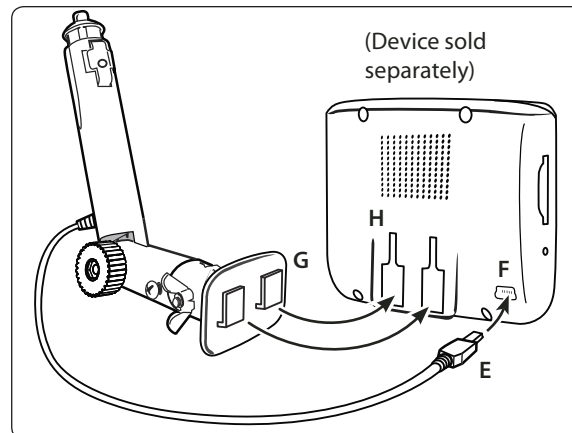

Step 2. Attach the device to the pedestal by inserting the dual T-tabs of the pedestal (G) into the dual T-slots of the device (H).



Safety Precautions

Do not install Arkon products over an air bag cover or within the air bag deployment zone. Arkon Resources, Inc. assumes no responsibility of liability for injury or death as a result of car crashes and/or air bag deployment.

Arkon is not responsible for any damages caused to your car, your device, or yourself due to the installation or use of this pedestal mount.

ARKON
RESOURCES INC.

The Mobile Mounting Specialists™

Consumer Hotline:

USA (800) 841-0884

INT'L (626) 254-9005

Monday - Friday 9am - 5pm, PST

www.arkon.com

Arcadia, CA 91006 USA

Designed in USA | Made in Taiwan

© Copyright 2009 Arkon Resources, Inc.