



## Peephole Viewer PVLCD3 INSTRUCTION MANUAL



[www.talossecurity.com](http://www.talossecurity.com)

## Contents

---

I.	Introduction .....	1
II.	Parts .....	1
III.	Functions .....	2
IV.	Operation Instruction .....	4
V.	Installation Instruction.....	8
VI.	Specifications .....	11
VII.	Cautions.....	12

## I. Introduction








---


Thank you for buying the PVLCD3 "Security Peephole Viewer". This product is based on our newest multi-function touch screen design and simple DIY installation. With closed circuit, door camera and indoor display, provides a DVR function for viewing all visitors that come to your door. You can view outdoor activity anytime, and with the integrated visible light function visitors can be seen clearly at night. The attractive and fashionable design, DVR feature and easy installation makes the PVLCD3 a great addition to any home security system. Please read both the installation and operation introductions with care.

## II. Parts

---

Package includes: One indoor monitor outdoor camera, wire, bracket, instruction manual, installment parts. Lithium battery and charger .


1. Indoor Monitor 	2. Outdoor Camera 	3. Bracket 
4. Cable 	5. Fittings 	6. Instruction manual 
		7. Lithium battery and charger 

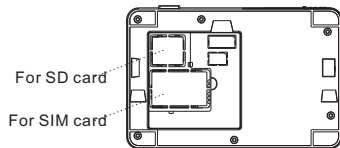


indoor monitor

### III. Functions

#### 1. Indoor Monitor Unit

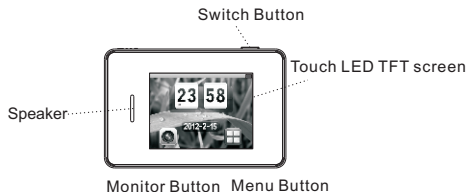

#### 2. Outdoor Camera Unit

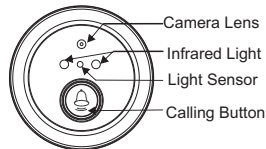

## IV. Operation Instruction

### A. Status Instruction:

Off state: Product is off.

Standby state: Product is in sleep state while screen is off.

Working state: LCD screen is on.

Monitor State: Displaying camera view.


Menu state: Press  button to enter menu.

### B. On/Off State:


Press and hold power switch button about 3 seconds to turn ON.

Press and hold power switch button about 3 seconds to turn OFF.

### C. Calling Function:

In standby or working state, visitors press the calling button on the outdoor unit, the bell rings and photos will be taken and stored automatically. Press  for larger image(4X Zoom).


### D. Monitor Function

In the main interface, press  button entering into monitor state. Users can view through outdoor camera. In monitor state, users can adjust parameter. Press "Back" button to enter into monitor state, press it again to exit.

### E. Take Photos:


In monitor state, press camera button to take photo. Press "Back" button to return to monitor state.



### F. Menu setup function

When the unit is on, press  (menu button ) to enter main menu.






#### 1. Visitor's photos

You can view visitors'  photos according to time and date. Press "option" button, can view additional menu choices




#### 2. Visitors video

In this menu , all recorded video and visiting time can be viewed. Press option button, you can choose play, delete and delete all document.



### 3. Time/Date Setup

In this menu , you can set up the time and date. Press OK button to confirm and save the settings.

Date setup

Y/M/D

2010/05/25

0	1	2	3	4
5	6	7	8	9

OK BACK

Time setup

HOUR: MINUTE

2010/05/25

0	1	2	3	4
5	6	7	8	9

OK BACK

### 4. Ring Setup

In this menu , you can adjust the ring tone and volume setting .

Ring setup

1. Ring  
Ring 9

2. Volume  
4

OPTION SAVE

- In ring setup menu, press option button to select the rings, then save it.
- In ring setup menu, press down button to set volume, then save it.

Ring option

1. Ring1  
2. Ring 2  
3. Ring 3  
4. Ring 4  
5. Ring 5  
6. Ring 6

CH OOSE BACK

Ring setup


1. Ring  
Ring 9

2. Volume

■■■■□□□

SAVE

### 5. Language

In this menu , you can choose different kinds of language.

Language option

English

Chinese

OK BACK

### 6. Other Setup

This menu  includes below setting:

1. Monitor Mode
2. Zone Alarm
3. Match Code
4. LCD backlight
5. Change Password
6. Restore factory settings

Other Setup


1. Monitor Mode  
2. Zone Alarm  
3. Match Code  
4. LCD backlight  
5. Change Password  
6. Restore factory settings

OK BACK

**a. Monitor Mode:** Select Photo or Video function.



b.LCD backlight: Adjust the backlight of monitor for best display effect. Note: More power consumption if reaching high brightness.

c.Restore factory settings: Setup the factory original status, code number is 1122.

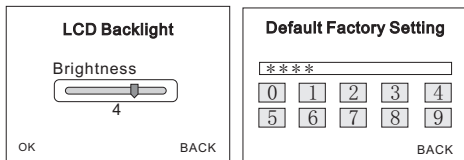

## V. Installation Instruction


### Outdoor Station Installation Instruction

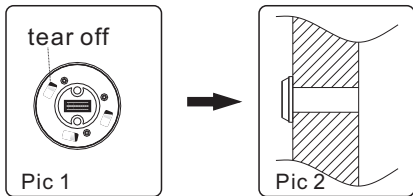

1. Peel off the tape from the outdoor unit.(Pic 1)
2. Install the outdoor unit right into the peephole, and press it firmly onto the door.(Pic 2)
3. Install the bracket while the wire being through it, and fix it with the screws.(Pic 3)


**Please note: if the pipe of outdoor unit is in different size, the hole on the bracket is also different.**

1. outdoor camera

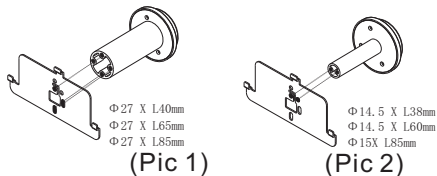


## Install Instruction For Indoor Monitor

1. Put the wire through bracket.
2. Connect the wire with indoor monitor on the back. Attention
3. If there is excess wire, it can be stored in the back of the monitor.

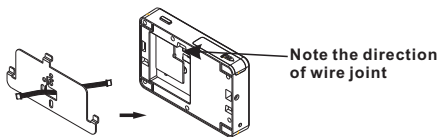

## Battery Installation Instruction

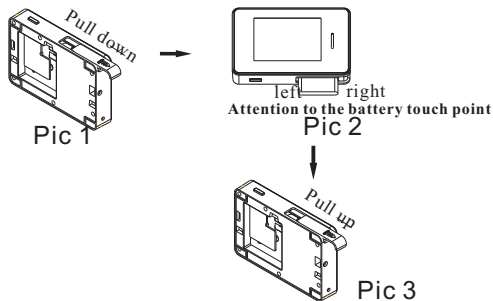

1. Slide the battery cover open. (Pic1)
2. Put the battery into the compartment space. (Pic2)
3. Carefully slide the battery cover on. (Pic3)

## VI. Specifications

### Outdoor Station

	Specs
Resolution:	High resolution
Camera:	1/6
Lowest camera degree:	0.1 LUX
Light Source:	2 white light LEDs
Size:	Φ50 × H12mm

### Indoor Monitor

	Specs
Power Supply:	1000mAH Battery
Screen:	2.8" LCD screen
Resolution:	High Resolution
Ring Type:	16 tones
Power Consumption:	Standby
Size:	100.5×66.5×18mm

## VII. Cautions

---

The product should be fixed on the door firmly. Do not close the door too heavily. Note the using environment should be well ventilated and not be wet. Please keep it away from violent daylight, strong magnetic field and dust. When washing its face, do not use chemical things, but clean, soft and dry cloth is strongly advised. Do not keep such a long time for monitor state. Do not press several buttons at one time. Do not make the small metal objects get into the inner part. Do not twist screws, for each of them is very important.

Please use it with our company's product, do not match with other products.

Non-professionals should not demolish inner construction. If need to repair, please contact the distributor or our technical department.

**Phone number: 1-888-980-8042**

**[www.talossecurity.com](http://www.talossecurity.com)**

### **Instruction and notice of using battery**

1. Do not throw the battery into fire, or it will explode.
2. Do not push too heavily when installing the battery, or it will cause some danger.
3. Do not use wire or needle to make the battery short circuit. And keep it away from the necklace or other metal things.
4. Do not weld the battery, or it will cause fire.
5. Do not disassemble battery.
6. Stop using the battery if it gets hot or the color and shape changes.
7. If the Battery liquid touches the skin & eye. You should flush it and go to doctor.

8. Do not charge battery longer than 24 hours.
9. Keep the battery away from sunshine and cool place.
10. Battery life is limited, it will be shortened after charging many times. If battery is ineffective after several charges, please replace the battery (BL-5C)
11. Dispose of the battery properly.

### **Instruction and Notice of Charger**

1. Put the battery in the charger first. "OK" indicate light is on, then you can connect the charger with electricity for recharge. If the light is not on, please check if the battery connected well, adjust it until the light on.
2. After connected to power, the "OK" light on, "full" light off, "charger" light blink, means charging is working.
3. If charge full, "full" is light on until the "charge" light off.
4. Please use 100-240V alternating current.
5. Please clear in clean environment
6. Do not expose the charger to any liquids.
7. Do not disassemble or modify the charger to avoid danger.
8. Do not use the charger in bathroom or some high temperature environments.
9. Do not charge in: Direct sunlight, temperature below 5°C and above 40°C, Wet or dusty place; around TV, radio or electronic equipment.