

20" LCD Flat-TV



FLAT TV™

- *Flat and slim design*
- *TFT LCD Screen - 640x480 pixels*
- *Integrated TV tuner*
- *Brightness 450cd/m² - Contrast Ratio 400:1*
- *Progressive Scan*
- *Digital Comb filter*
- *Stereo Integrated Sound System 2x2W_{RMS}*
- *Graphic Equalizer*
- *Closed Captioning*
- *AutoLock™ (V-chip)*
- *1fh YUV (YPbPr) input*
- *'Arch' table-top stand*



'Arch' stand incl.



Let's make things better.




PHILIPS

20" LCD Flat-TV



Liquid Crystal (Display) Television works by trapping a liquid crystal solution between two sheets of polarized glass. When an electric current is passed through the liquid crystals, they align so light cannot pass through. Each crystal then either blocks or allows light to pass through it based on the broadcast information. For clear, crisp color that rivals traditional CRT displays, a thin film transistor, known as a TFT is employed.

LCD allows screens to be thinner, and televisions lighter and more energy efficient than ever before. The result is television that not only can fit on a wall, it can fit in places conventional televisions cannot.

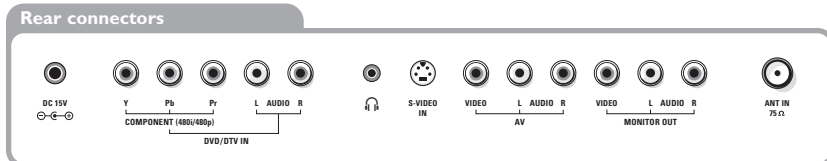

Technical specifications

Screen / Picture

- Visible screen size : 20.1"
- Picture Aspect Ratio 4:3
- LCD technology : Thin Film Transistor - TFT
- # pixels : 640 x 480
- Response time LCD : 25ms (typical)
- Light output : 450cd/m²
- Contrast Ratio : 400:1
- Viewing angles : 140h / 120v
- Anti glare coating
- Progressive Scan
- De-interlacer
- Color Transient Improvement
- Digital Comb filter (4H)
- Contrast / Brightness control

Sound

- Sound system : BTSC / SAP Stereo
- Output : 2x2W RMS
- Speakers : 2x2 - full range + tweeter
- Graphic Equalizer
- AVL

Operation

- EasyTune™
- Multi-language menu / OSD (Eng, Fre, Spa, Port)
- Sleep timer up to 180 minutes.
- AutoLock™ to protect young kids from objectionable programming with V-chip technology
- Closed Captioning

Reception

- Tuning system: PLL Digital Tuning
- Color transmission systems
- Off-air: NTSC - M
- NTSC video playback
- Channel selections : 125 channels
- Aerial input: 75 Ohm (F-threaded)

Remote Control

- RC282605


Connections

- Audio / Video
 - Component video in YUV-in / YPbPr (cinch) input + audio L-R
 - Video CVBS in, audio L-R in (cinch)
 - S-Video in (Y/C)
 - Monitor out : Video CVBS, audio L-R (cinch)
 - headphone jack 3.5mm
- DC input
 - 15V / 4.5 A
- Antenna
 - Input 75 Ohm F-pin

Miscellaneous

- Ambient temperature : +0/+40°C
- Mains : AC 95-264V, 50/60Hz
- Power consumption: 70W (normal operation) ; Stand by : <3W
- Weight : 21.2 lbs (incl. 'arch'; excl. packaging)
- Dimensions (WxHxD):
 - product : 25.3x16.7x3.3 in. (excl. 'arch')
 - carton : 30.0x22.9x12.2 in.

UPC : 0 00000 00000 0

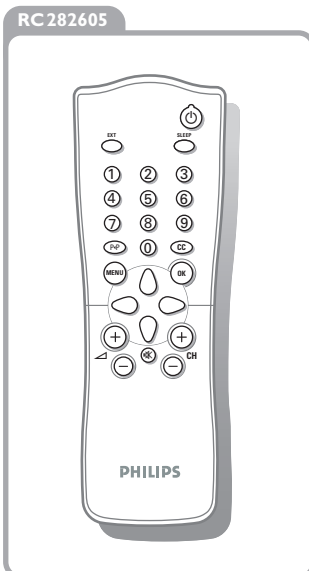

Release date : February 2002
Predecessor(s) : -
Date of issue : Nov. 2001

© 2001 Philips Consumer Electronics Co.
A Division of Philips Electronics North America Corp.

EasyTune and AutoLock are trademarks of Philips Consumer Electronics Company.

Internet address
<http://www.philips.com>

Printed in USA

Specifications subject to change without notice.

Let's make things better.



PHILIPS