



User Manual

Before you begin

- Please unpack the box carefully and identify that all the parts are present.
- Please bear in mind the following points when choosing a mounting position.
 - > The camera must be positioned so that it will not point directly into the sun (sunrise and sunset) or any bright light, as this may cause damage to the camera
 - > Avoid viewing areas where half the area is in bright sunlight and the other half is dark, such as in the shadow of a building. All types of cameras have difficulty in 'seeing' with such a large lux level variation.
- Do not cut the camera cables, this will void the warranty.
- Make sure you use only the recommended power supply. Damage caused to the camera by incorrect voltage or wiring is not covered by the warranty.

Model: **XPB731WIR-2**

700 TVL 50m IR Camera
with DNR, WDR and 6m NPR

Contents

1. Safety Precautions	3
2. Product Description	4
3. Features	4
4. Contents	4
5. Installation	5
6. Camera OSD Control	6
7. OSD Menu Structure	7
8. SETUP Menu Functions	8
8.1 Lens	8
8.2 Shutter/ AGC	9
8.3 White Balance	9
8.4 Backlight	10
8.5 Picture Adjust	10
8.6 ATR	11
8.7 Motion Detection	11
8.8 Privacy Zone	12
8.9 Day/Night	12
8.10 Noise Reduction	13
8.11 Camera ID	13
8.12 Synchronize Mode	13
8.13 Language	13
8.14 Camera Reset	13

Thank you for purchasing this Xvision camera. Before operating this product, please read this instruction manual carefully.

1. Safety Precautions



CAUTION
RISK OF ELECTRIC SHOCK.
DO NOT OPEN!



CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT OPEN COVERS UNLESS MAKING LENS ADJUSTMENTS. NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

- Do not disassemble or modify the camera. Please refer repairs or service to a qualified service technician.
- Take care when installing the camera. Avoid scratching the front glass window.
- Avoid shock and vibration. Do not install the camera on an unstable surface. It can be damaged by improper use or storage.
- Do not attempt to point the camera at the sun or other extremely bright objects. It can cause image smearing whether the camera is powered on or not and can lead to the damage of the CCD (Charge Coupled Device).
- When camera is installed next to equipment, such as wireless communication device, that emits a strong electromagnetic field, some irregularity such as noise on the monitor screen may occur.
- Operating temperature: $-10^{\circ} \sim +45^{\circ}\text{C}$
- Provide ample slack in the video and power cables once the camera is installed in its final position.
- Request the service of a qualified technician if the camera malfunctions or generates excessive amounts of heat.

2. Product Description

The XPB731WIR-2 IR camera is designed for high risk applications, offering very high resolution images of 700 TVL.

The camera feature high power Infrared (IR) LEDs offering 50m nightvision in complete darkness and split glass technology that eliminates any IR bounceback.

It features a powerful ARM based DSP, which processes the image in real time and improves it by using Digital Noise Reduction and Wide Dynamic Range to produce an even image, that does not suffer from bright or dark spots. Further enhancing the picture is a megapixel lens, which is fully adjustable, allowing you to select the perfect viewing angle for your application.

Additionally features such as an On Screen Display (OSD) with a Varifocal Lens that allows the user to fully customise the camera's settings to its environment. It is designed for both internal or external use and can be wall/ceiling mounted.

3. Features

4


- 700 TVL high resolution colour image
- Sony 1/3" Ultra High Resolution CCD Sensor with an Xvision X7 DSP.
- 2.8 to 12mm Varifocal Auto Iris Lens for 23 to 92° viewing angle for super sharp images and easy selection of the optimum viewing angle during installation.
- Integrated Long Life Infra Red LEDs turn on automatically in low light conditions or complete darkness and provide up to 50 metres Night Vision.
- Smart DNR (Digital Noise Reduction) reduces the noise on the image when viewing in low lux environments (like at night). This reduces the size of the image when being recorded by a DVR, resulting in a saving of disk space.
- WDR (Wide Dynamic Range) feature allows the camera to display balanced pictures even when the scene being watched has bright spots or various light levels and back light conditions.
- On Screen Display menu for complete customisation of the features.
- Designed for wall mounting and is suitable for internal or external use.

4. Contents

- XPB731WIR-2 Camera
- User Manual
- Screws & Wall Plugs
- Allen Key

5. Installation


1. Select a suitable position on the wall or ceiling to install the camera and map out the holes for the bracket.
2. Drill a hole in the middle of area on the wall or ceiling where the camera is to be mounted, to allow the power and video cable to be fed through. Alternatively, the cable can be surface mounted by taking the cabling out through the side of the bracket.
3. Screw the bracket base to the wall or ceiling using the Wall Plugs and screws supplied.
4. To change the bracket position during installation, the different screws on the bracket can be adjusted as shown in the diagram (A-D).
5. Once installed the camera's Zoom & Focus can be altered by adjusting corresponding Focus and Zoom screws located underneath the camera body (see image below) .

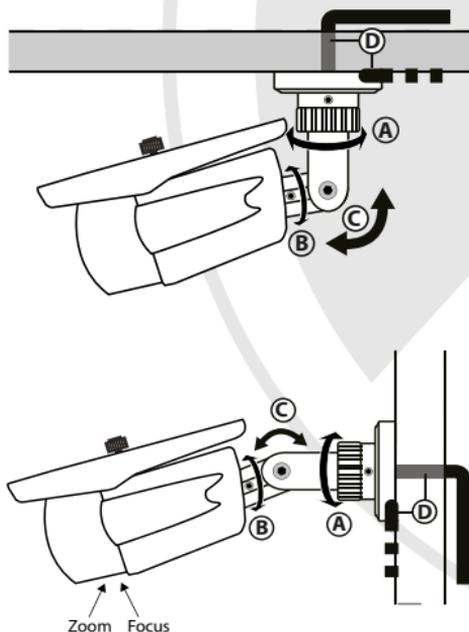

5. Installation continued

CONNECT THE POWER & VIDEO CABLES

1. Connect the video output to the monitor or other video device through a 75 Ohms type coaxial cable.
2. Connect the power source, insert the AC plug into the AC socket and the DC plug into the DC Jack (+12V DC in jack centre).




6. Camera OSD Control

6

Various camera settings can be adjusted using the OSD button located on the camera's cable.


Press the SET button to enter the OSD Menu.



OSD Button Control Actions

Press these controls	For this Action
UP, DOWN	Select between items in a list
LEFT, RIGHT	Select a menu item to change its settings
SET (MENU)	Call up the OSD Menu/ Access a Sub Menu

7. OSD Menu Structure

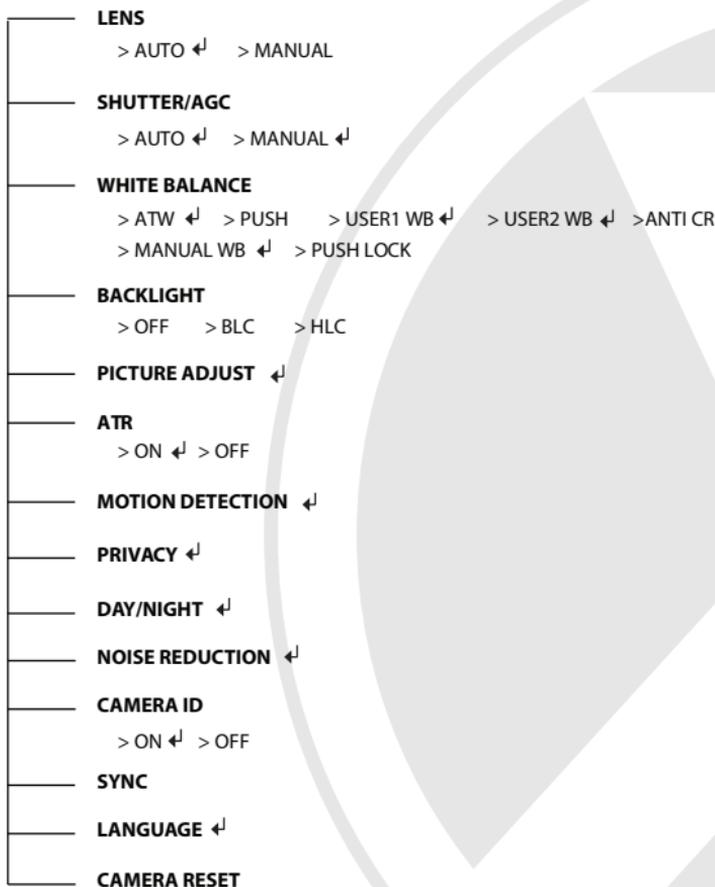

Please Note:

- The arrow symbol on the OSD menu ↵ indicates that there is a sub-menu available. You can enter the sub-menu by pressing the SET (Menu) button.
- **RETURN:** allows the user to return back to the previous menu.
- **NEXT:** allows the user to move to page 2 of the main menu.
- **BACK:** allows the user to return to page 1 of the main menu.
- **EXIT:** allows the user to exit out of the main menu completely.
- **SAVE ALL:** allows the user to save all the current settings.

8. SETUP Menu Functions continued

8.2. SHUTTER/AGC

Continued

- If you have previously selected 'MANUAL' for the 'LENS' item, the mode will be forced as 'SHUT'. The 'BRIGHTNESS' item let you adjust the aperture to tailor the brightness to your preference.
- Under 'LOW LUMINANCE', you can choose 'AGC' mode (default setting) to have the camera automatically increase the gain when in low light conditions to produce a brighter image. The 'BRIGHTNESS' item allows you to tailor brightness level to your needs.
- The MANUAL shutter option provides a submenu that contains Mode, Shutter and AGC setting. 'SHUTTER' item lets you specify the shutter time (between 1/50 sec and 1/10000 sec). Adjust 'AGC' level according to your lighting conditions.

8.3. WHITE BALANCE (WHITE BALANCE MENU)

<Option : ATW / PUSH / USER1 WB / USER2 WB / ANTI CR / MANUAL WB / PUSH LOCK>

White Balance (WB) adjusts the colour temperature of the camera image to match the type of light available, so that colours appear as natural as possible.


ATW	
SPEED	033
DELAY CNT	033
ATW FRAME	x0.75
ENVIRONMENT	INDOOR
RETURN	↵

- ATW: Adjusts the cameras automatically to the colour temperature range. 'SPEED' controls the speed of ATW. Changing the 'ATW FRAME' and 'ENVIRONMENT' setting will affect the color temperature range. Smaller value for 'ATW FRAME' leads to a smaller range of color temperature. The color temperature ranges from 2500K to 9500K for indoor environment, and 1800K to 10500K for outdoor environment.
- Selecting 'USER1/2' mode will allow you to adjust the blue gain and red gain individually. 'MANUAL' mode will let you adjust the blue gain and red gain simultaneously. The 'ANTI CR' (anti color rolling suppression) mode uses a smaller range of color temperature than ATW mode does.

8. SETUP Menu Functions continued

8.10. Noise Reduction

Here you can configure the 2D digital noise reduction function (default: off). Its submenu includes 3 noise reduction mode: 'Y', 'C', and 'Y/C'. Select any of the three NR modes, highlight the Y or C level, and then press the LEFT/RIGHT button to adjust the slider for Y level (brightness signal) or C level (color signal return).

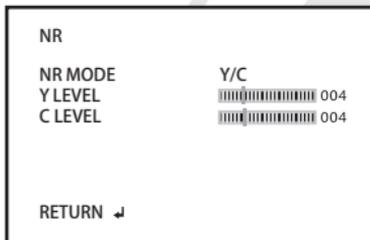

8.11. CAMERA ID

You can create a camera title to be displayed on the screen. Switch to 'ON' and press the setting button to input a custom title. The camera title can be named with up to 52 characters in two lines. Highlight and select 'POS' to move the title to the preferred position on screen.

13

8.12. SYNCHRONOUS MODE

This function is not used.

8.13. LANGUAGE

Press the LEFT/RIGHT button to change the language of the OSD menu. Available languages include English, Japanese, German, French, Russian, Portuguese, Spanish, and Chinese.

8.13. CAMERA RESET

Resets all settings to the factory default.

Specifications

Model:	XPB731WIR-2
Picture Type:	Day/Night (B/W & Colour)
Image Sensor:	Sony 1/3" Ultra High Resolution CCD
DSP:	Xvision X7 DSP
Resolution:	700 TVL
Lens Viewing Angle:	23 to 92°
Infra Red Night Vision:	50 metres
Minimum Illumination:	0 Lux (IR on)
Audio:	No
Operating Voltage:	12V DC 700mA
Suggested Power Supply:	12V DC 1250mA
Mounting:	Wall/Ceiling
Weatherproofing:	Yes
Dimensions (WxHxD):	101.3 x 97.3 x 298.2 mm
Weight:	1.1 Kg

14

TECHNICAL SUPPORT:

For Technical Support for any Xvision product please contact your local distributor.

LIMITED WARRANTY:

This product is supplied with a 1 Year warranty.

The Warranty excludes:

Products that have been misused, (including accidental damage) and damage caused by normal wear and tear. In the unlikely event that you encounter a problem with this product, it should be returned to the place of purchase.

Manufactured exclusively for Xvision - www.xvision.com



Head Office
Xvision Group (UK)
Unit 2, Valley Point, Beddington Farm Road,
Croydon, Surrey CR0 4WP
E: sales@xvision.com

Far East Office
Kyoung Am Building,
157-27 Samsung-dong
Kangnam-ku, 135 090 Seoul, Korea
E: globalsales@xvision.com