


42" Flat TV Monitor /AP


- Flat, Slim and Wide design
- Plasma ALiS/HD technology
- Brightness 1000cd/m² (without filter plate)
- Contrast ratio 1000 : 1
- 160° viewing angle / Anti-reflective coating
- Integrated speakers/sound system
- 2x15Watt RMS
- HD in - 2fhYPbPr in / RGB+HV
- DVI-digital in / 1fh YUV in
- VGA in/out - SmartPort
- Superslim 9cm depth
- RC out - to iTV system
- Fanless design (no fan noise)
- Wall mounting kit incl.



'Arch' table-top stand - optional

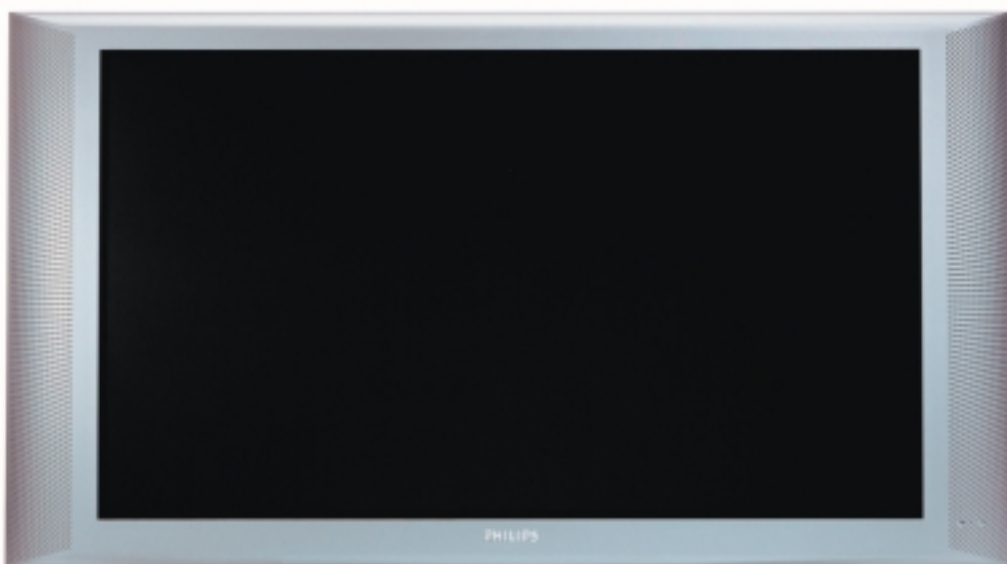

RC 19335009/01

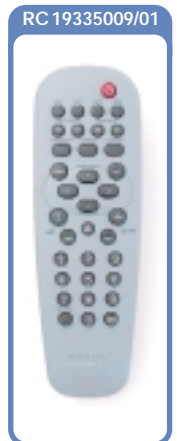

42" Flat TV Monitor /AP



Technical specifications

Plasma screen

- Visible screen diameter 42" / 106,7cm - 16:9 aspect ratio
- ALiS/HD 1024x1024 pixels (x3)
- Contrast ratio : 1000:1 (dark room)
- Brightness : 1000cd/m2 (without filter plate)
- Anti-reflex coated glass screen
- Fanless design (no fan noise)
- Wall mount kit : Flat-to-Wall as well as Tilted
- Optional stands : a.o. 'Arch' TC42 9964/2R

Picture processing

- Video standards :
 - PAL 4.43 (B, G, D, H, I, N)
 - PAL 3.58 (M, N)
 - NTSC 3.58 (M)
 - NTSC 4.43
 - SECAM
- Tint Control (3 modes)

Sound processing

- Output : 2x15W RMS (@10%THD)
- Digital Signal Processing
- Spatial-Pseudo Stereo
- Bass / Treble control
- 'Monitor is Center' setup (with ext. HiFi system)

Ease of Use

- Menu Languages : Danish, Dutch, English, Finnish, French, German, Italian, Norwegian, Portuguese, Swedish and Spanish
- Dynamic graphical user interface. Easy and intuitive operation through feedforward and backtracking display
- Full menu control of all functions through layered menus
- Onscreen status display for sources and functions (OSD)
- RS232 for service and control via PC
- Last Status (for picture & sound)

Remote Control

- RC19335009

Connections

- VGA
 - VGA in (15pin sub-D) + audio L-R
 - FlexVGA (Loop-through/in) (15pin sub-D) + audio L-R
- Multi media modes

VGA	640 x 480	60, 72, 75, 85 Hz
VGA	640 x 400	70 Hz
VGA	640 x 350	70 Hz
Wide VGA	856 x 480	60 Hz
Wide VGA	800 x 450	65 Hz
Wide VGA	1024 x 600	60 Hz
Wide VGA	1360 x 765	60 Hz
MAC	640 x 480	66.67 Hz
MAC	832 x 624	74.55 Hz
MAC	1024 x 768	74.93 Hz
MAC	1152 x 870	75 Hz
SVGA	800 x 600	56, 60, 72, 75, 85 Hz
XGA	1024 x 768	60, 70, 75, 85 Hz
SXGA	1280 x 1024	60, 72 Hz (Analogue) 60 Hz (DVI)
- Audio / Video
 - AV 1 : - Video CVBS, audio L-R
 - AV 2 : - Video CVBS, audio L-R
- S-Video (Y/C)
 - AV 3 : - Component video in YPbPr, audio L-R (+CVBS)
- Component video in YPbPr (2Fh for DVD), audio L-R
- R/G/B/H/V (cinch) + audio L-R
 - DVI-d in (digital) + audio L-R
- Video CVBS out, audio L-R out
 - RC-out for ICONN box
 - RS232 for service / control

Miscellaneous

- VGA cable included, 2m
- CD-rom with RS232 driver software included
- Ambient temperature : +5/+40°C
- Maximum operating altitude : 2000m / 6562ft
- Mains : AC 95-264V, 50/60Hz
- Power consumption: ±380W (normal operation)
Stand by : <2W
- Weight : monitor 40.0 Kg
- Dimensions (WxHxD):
monitor : 121.4x65.6x8.9 cm.
carton : 149.0x95.2x49.0 cm.

Product highlights

ALiS/HD Plasma technology with 1024x1024 pixels.

Dual HD component input and full 1080i resolution display for connection to high definition input.

480i, 576i, 1080i, 480p, 720p resolution support.

Powerful 2x15W RMS amplifier built in. Full digital sound processing.


Continuous Zoom. Cursor movable zoom window.

Multi system Remote Control

YPbPr inputs for best DVD reproduction

11 menu languages, Danish, Dutch, English, Finnish, French, German, Italian, Norwegian, Portuguese, Swedish and Spanish

- Optional FRT9955 e-Box delivers superior picture with Digital Natural motion and the convenience of one cable hookup
- Optional Matchline FRT9965 e-Box delivers all of the benefits of the FRT9955 PLUS the ultimate in picture performance with Pixel Plus and 2 Tuner Split Window PIP
- Optional Television Stand (shown on front) provides the ideal solution to table top television placement with an emphasis on high design and safety.

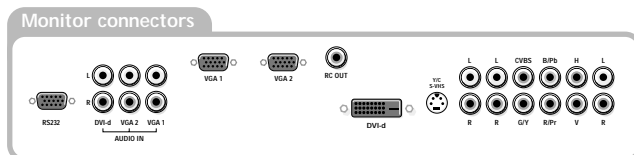

©2003 Philips Consumer Electronics Company
FlatTV is a trademarks of Philips Consumer Electronics Company.

Website: www.philips.com
Specifications subject to change without notice.

Release date : Jan. 2003
Predecessor(s) : -
Date of issue : Dec. 2002

