

USER MANUAL

Model LYCR-300 Dimmer Receiver

FEATURES:

- No wiring, easy operation, just plug and use.
- **67 million codes, self program function receiver.**
- **Receiver has 6 memory settings, no memory loss forever.**
- Red LED indicator for POWER ON and PROGRAMMING SETTINGS.
- Transmitter with 16 receivers control on paged channel.

INSTALLATION:

Controller (Receiver)

- Just plug-in receiver into wall outlet
- Indicator on receiver should light on.
- Connect lamp plug into receiver

Remote control (Transmitter)

- Remote control till 30M in open area

OPERATION :

ON/OFF RECEIVER

- * Press transmitter button 'ON' to switch on.
- * Press transmitter button 'OFF' to switch off.

DIMMER RECEIVER

- * Press transmitter button 'ON' twice, light will start to dim, press again, light stops at required brightness.


HOW TO LINK CODE:

- * To start, program your transmitter with the receiver.
- * Receiver plugged on power
- * Bring the transmitter near the receiver, push the self program button on receiver once
- * Receiver led will blink slowly, press transmitter selected "ON" button
- * Receiver connected lamp will blink twice, code is confirmed and led stops blinking.
- * Remember the transmitter button you selected for the programmed receiver.
- * Transmitter and Receiver codes are auto programmed.

TO CHANGE OR DELETE CODE :

INDIVIDUAL DELETE -

- * Push the self program button once, led will blink slowly
- * Press selected "OFF" button on transmitter, programmed memory is deleted.
- * Receiver connected lamp will blink twice for confirmation.
- * Repeat step for re-setting

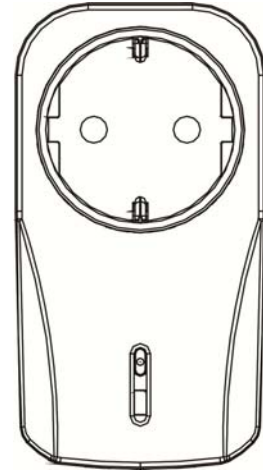

ALL MEMORY DELETE -

- * Push the self program button till the LED blinking continuously
- * Release and push again once.
- * Receiver connected lamp will blink twice for confirmation.
- * ALL PROGRAMMED MEMORY WILL BE DELETED FROM RECEIVER

RECEIVER HAS 6 MEMORY SETTINGS :

- * Self program function RECEIVER has 6 memory settings.
- * It can be programmed as to your requirement with special effect. It can be programmed to switch ON at one time individually or programmed with different combinations switching.
- * This means one receiver can be programmed into max. 6 different combination.

Example : If there is 3 receivers, [receiver 1 = lamp shade , receiver 2 = night light , receiver 3 = fan]

Receiver 1,2,3 can be control individually with transmitter button 1,2,3

Receiver 1,3 can be programmed with transmitter button 4, (lamp shade and fan ON/OFF at same time)

(Above settings 'Receiver 1' and '3' takes up 2 programmed memory and 'Receiver 2' only 1 program memory, different combinations and settings can be teamed up and control from transmitter)

SPECIFICATION

RECEIVER

Frequency: 433.92MHz

Power: 240V +/-10%, 50Hz

300 watt / 230VAC (incandescent lamp)

FAULT FINDING

No activation : Check battery polarity or running out battery
 Check code program successful.

CAUTION :

Do not place two receivers near each other, the distance should be above 1 meter.

Warning!

DO NOT OVERLOAD

Do not plug or use in damp places like patios, cellar, flammable liquid, solvents, paints etc...