


TORQSENSE®

RWT310/320 series Torque Transducer

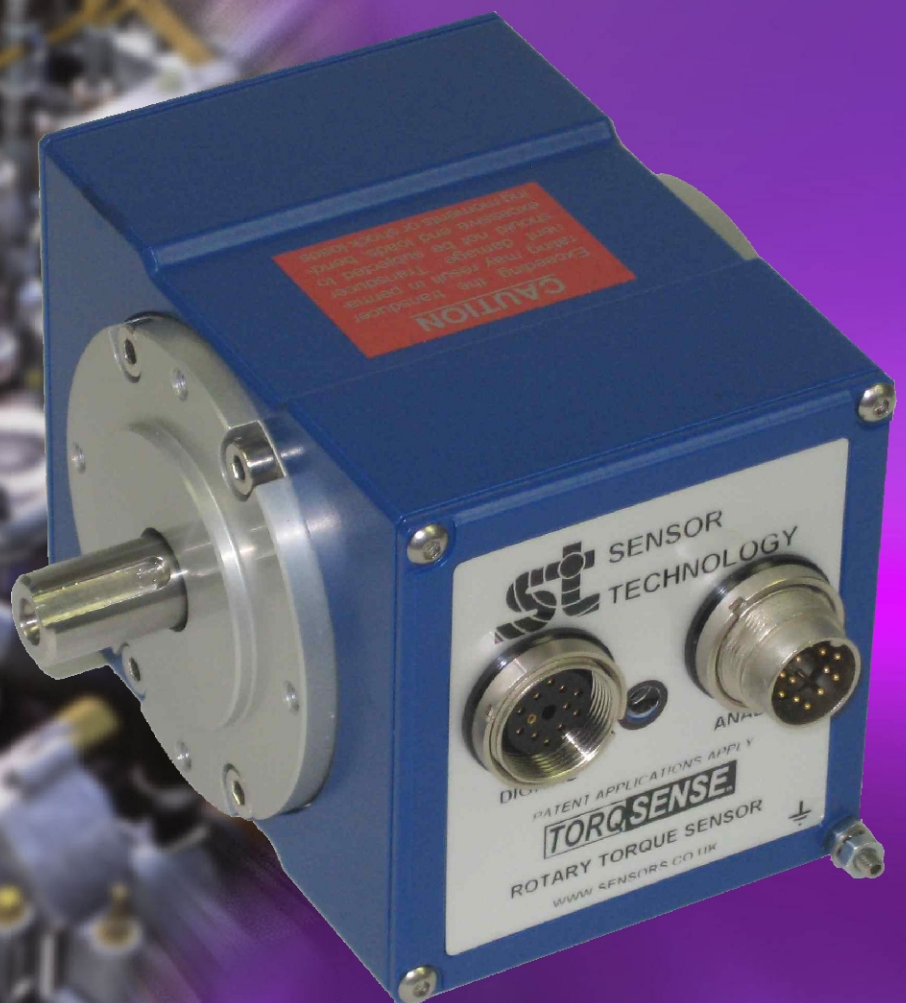

Digital RWT310/320 series Torque Transducer

TorqSense Digital RWT310 & 320 series transducers with integral electronics now offer cost effective, non-contact digital rotary torque measurement, using Surface Acoustic Wave technology, suitable for torque monitoring, testing or controlling drive mechanisms. TorqSense RWT310 & 320 series transducers and their technology are particularly appropriate for OEM applications.

Benefits

- Minimal shaft length
- High shaft stiffness
- Low inertia – High Speed capability because electronics are not fixed on to shaft
- Non contact measurement
- High bandwidth
200% safe mechanical overload
- High accuracy and resolution
- Excellent noise immunity
- Integral digital electronics
- Operates both statically and dynamically
- Clockwise/anti-clockwise
- Any full scale torque can be specified within Standard range: 1Nm through to 10,000Nm
- Lifetime warranty



Consult factory for ranges greater than 10KNm

High speeds available on request

Technology

TorqSense patented technology is the measurement of the resonant frequency change in 'frequency dependent' surface acoustic wave devices, caused when strain is applied. The signal is coupled via a non-contact RF rotating couple from the shaft to a fixed pick-up.

Integral electronics enables the resonant frequencies to be measured and offer user selectable features, digital outputs and diagnostics. SAW devices are not affected by magnetic fields.


Software

TorqView is an easy to use advanced torque monitoring software, available to assist data recording and instrumentation displays that interface with Windows based PCs. See TorqView datasheet.

Features: 3 types of display. Text files compatible with Matlab and Excel. Real time chart plotting.

LabView VIs are available for users to design their own process control applications.

DLLs are also available for users to write their own custom software.

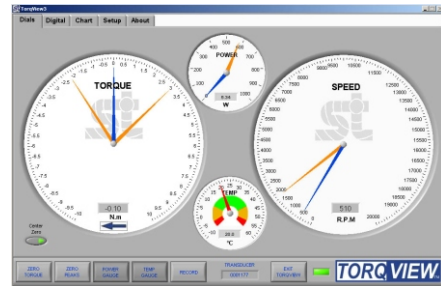

TorqSense RWT310 series transducers offer:

- Fixed voltage or current analog outputs (one for torque and the other for speed or power) for interfacing with legacy analog instrumentation
- BIT Self-diagnostics for letting the manufacturer know that the transducer's torque, speed ratings and calibration due date have not been exceeded.
- Simple 'Fail' output pin
- Sensors to monitor shaft temperature for better compensation and accuracy

Whereas, TorqSense RWT320 series transducers offer:

- 2 x user selectable voltage or current analog outputs (one for torque and the other for speed, power or peak torque) for interfacing with legacy analog instrumentation
- Digital outputs, such as RS232 and USB, for interfacing with modern instrumentation and laptops
- Digital input for configuring transducer via PC
- BIT Self-diagnostics for letting users know data is trustworthy, that the transducer's torque, speed ratings and calibration due date have not been exceeded
- Transducer configuration software to allow user to changes transducer variables
- Ability to connect up to 10 transducers using USB
- Simple 'Fail' output pin
- Sensors to monitor shaft temperature for better compensation and accuracy

RWT310/320 Series Torque Transducers - Data Specification

Parameter	Condition	Data						Units		
RWT310/320 Torque measurement system										
Measurement method	Strain Dependent Surface Acoustic Wave Resonators (interrogated by an incremental electronic scanning method)									
Torque range	(See Notes 1 & 2 below)	0 – 1	0 – 1.1 to 0 - 20	0 – 21 to 0 - 100	0 – 101 to 0 - 500	0 - 501 to 0 - 2000	0 – 2001 to 0 - 10000	Nm		
		[0 - 10]	[0 – 11 to 0 - 200]	[0 – 201 to 0 - 1000]	[0 – 1001 to 0 - 5000]	[0 – 5001 to 0 - 20000]	[0 – 20001 to 0 - 100000]	[lbf in]		
Shaft size (diameter)		6	12	20	30	50	75	mm		
Rotation speed/angle of rotation measurement system										
Measurement method	Opto switch through slotted disc									
Direct output signal	Pulse output direct from opto switch (TTL, 5V square wave), output is independent of any analog or digital processing.									
Digital Processing Techniques	Processing Method		Update rate for analog and digital outputs							
	Mode 1 (Slow Method) Frequency Count		1						Hz	
	Mode 2 (Fast Method) Period Count		0 – 2000 RPM 2000 – 4000 RPM 4000 – 8000 RPM 8000 – 16000 RPM 16000 – 32000 RPM			RPM / 2 ((RPM – 2000) x 0.3227) + 650 ((RPM – 4000) x 0.196) + 800 ((RPM – 8000) x 0.1117) + 850 ((RPM – 16000) x 0.058) + 900			Hz	
Processing modes run simultaneously and can be applied to either analog channel or accessed individually via a digital connection.										
Rotational speed (max)	(See Note 3)	30,000	20,000	15,000	12,000	9,000	6,000	RPM		
Temperature										
Measurement method	IR temperature sensor monitoring actual shaft temperature									
Temperature accuracy								±1	°C	
Reference temperature, T _{RT}								20	°C	
Operating range, ΔT _O								-10 to +50	°C	
Storage range, ΔT _S								-20 to +70	°C	
Temperature drift (FS)	Max							0.05	%FS/°C	
Specifications										
Linearity								±0.25	%FS	
Hysteresis								<0.1	%FS	
Resolution								0.1	%FS	
Repeatability								0.1	%FS	
RWT310 Series Transducers ONLY										
Frequency response								101	Hz	
Accuracy	20°C, SM (See Note 4)							±0.25 (±0.5 for 2Nm and below)	%FS	
RWT320 Series Transducers ONLY										
Frequency response		1620	810	405	202	101	50	25	12	Hz
Accuracy	20°C, SM (See Note 4)	±1	±0.7	±0.5	±0.4	±0.25	±0.25	±0.25	±0.25	%FS
Digital averaging	(See Note 5)	1	2	4	8	16	32	64	128	N
Analog output										
Output voltages (Torque/Speed/Power)		Options available: ±1 / ±5 / ±10 / Unipolar (RWT310 Series default setting is ±5Vdc) (RWT320 Series output voltages are user selectable)							Vdc	
Load impedance		Maximum 1							KΩ	
Output currents (Torque/Speed/Power)		Options available: 4-20mA, 0-20mA and 12±8mA (RWT320 Series output currents are user selectable)							mA	
4-20mA Loop resistance		Should not exceed 400							Ω	
Digital output (RWT320 Series Transducers ONLY)										
Output type		RS232 (Standard), USB 2.0 full speed 12 Mbps (optional), CANbus (optional)								
Sampling rate		1.62							ksps	
Power supply										
Nominal voltage, V _S		12 to 32 (max)							V	
Current consumption, I _S		500 (max)							mA	
Power consumption, W _S		6							W	
Allowed residual ripple of excitation voltage, V _{ripple}		500 (above nominal supply voltage)							mVp-p	
Electromagnetic compatibility										
EMC compatibility		EN 61326:2006								

Note 1. Any torque/FSD is possible between ranges – please specify max rated torque.

Note 2. Max rated torque should not be exceeded.

Note 3. Please consult factory for applications requiring rotational speeds that exceed maximum figures given. Transducers fitted for IP65 will have running speeds considerably reduced, increased drag torque and accuracy can be affected.

Note 4. SM – Static Mode. Dynamic values will depend upon user application and has to be adjusted accordingly.


Note 5. Digital averaging can be configured by user to optimise accuracy/frequency response for specific user applications. Digital averaging default setting is N=16. For details see User Manual.

Data parameters measured at +20°C

Sensor Technology Ltd reserves the right to change specification and dimensions without notice.

RWT310/320 Series Torque Transducers

Dimensions (1Nm to 100Nm)

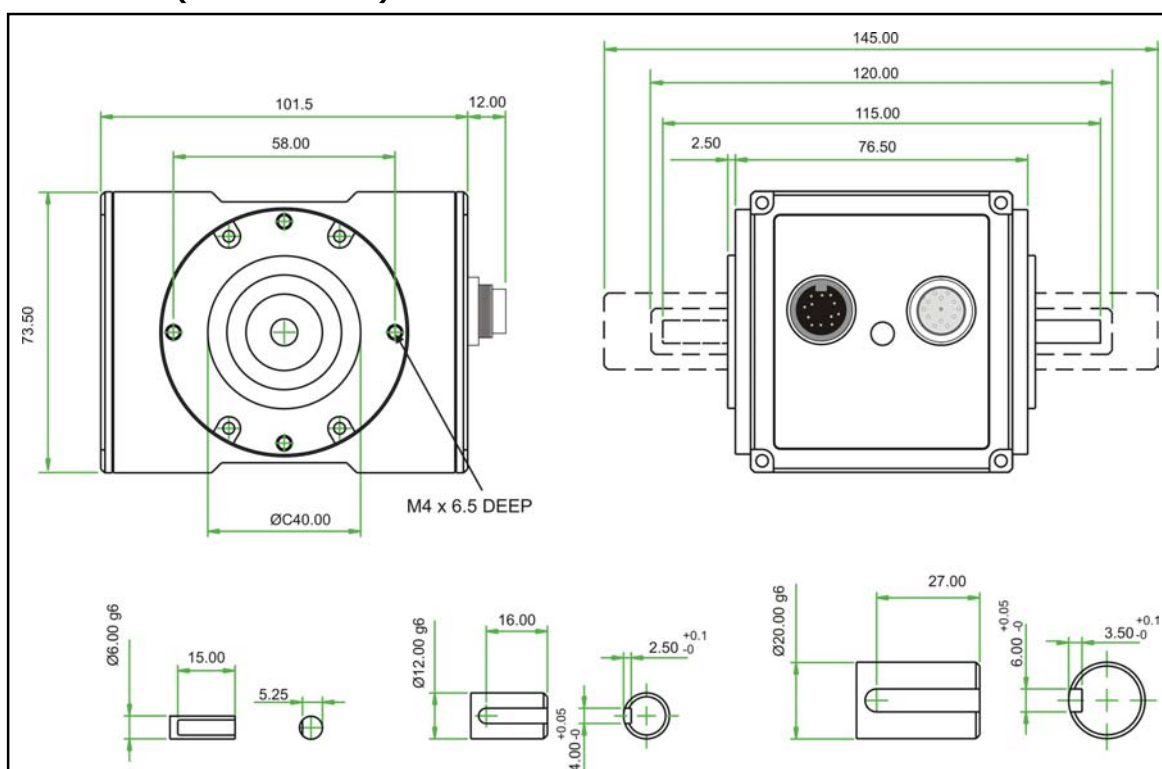


Parameter	Data												Units
Mechanical Properties													
Torque (Max)	1	2.5	3.9	6	8.5	13	17.5	20	30	55	85	100	Nm
Shaft Code	CF	DA	DF	DB	DC	DG	DD	DE	EB	EC	ED	EE	
Shaft Size (Diameter)	6	12							20				mm
Torsional Stiffness	0.23	1.28	1.3	1.32	1.6	1.7	1.8	1.9	4.1	6.4	8.1	9.2	KNm/rad
Mass moment of inertia, I_y	0.45	5.96	6.00	6.04	6.13	6.18	6.24	6.42	22.9	23.9	25.4	27.2	$\times 10^{-6}$ kg m ²
Max measurable load limit	120 (of rated torque)												%
Static safe load breaking	200 (of rated torque)												%
Shaft weight, approx	0.03	0.14	0.14	0.14	0.14	0.15	0.15	0.15	0.36	0.37	0.40	0.41	kg
Transducer with shaft weight, approx	0.7	0.8	0.8	0.8	0.8	0.8	0.8	0.8	1.0	1.0	1.1	1.1	kg

Data parameters measured at +20°C
 Sensor Technology Ltd reserves the right to change specification and dimensions without notice.

RWT310/320 Series Torque Transducers

Dimensions (101Nm to 500Nm)

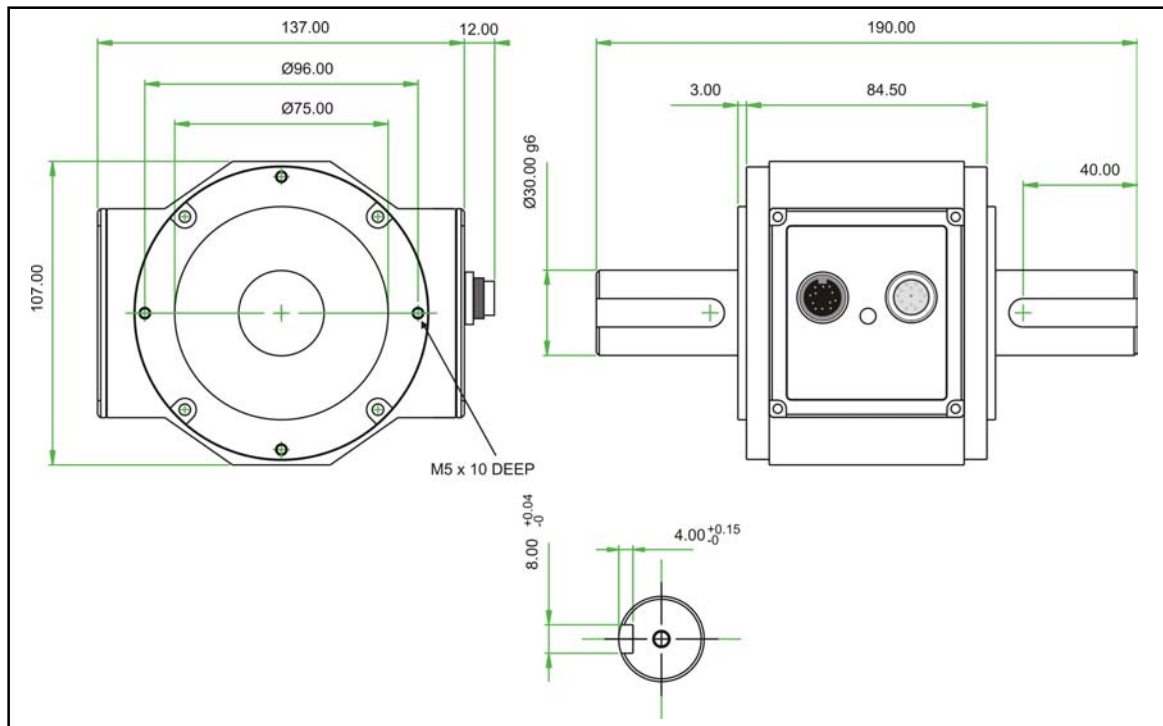


Parameter	Data					Units
Mechanical Properties						
Torque (Max)	175	225	265	350	500	Nm
Shaft Code	FA	FB	FC	FD	FE	
Shaft Size (Diameter)	30					mm
Torsional stiffness	32.9	35.6	37.2	37.9	39.8	kNm/rad
Mass moment of inertia	138.9	143.1	147.7	151.9	174.2	$\times 10^{-6}$ kg m ²
Max measurable load limit	120 (of rated torque)					%
Static safe load breaking	200 (of rated torque)					%
Shaft weight, approx	1.1	1.1	1.1	1.2	1.2	kg
Transducer with shaft weight, approx	2.4	2.4	2.4	2.5	2.5	kg

Data parameters measured at +20°C
 Sensor Technology Ltd reserves the right to change specification and dimensions without notice.

RWT310/320 Series Torque Transducers

Dimensions (501Nm to 10000Nm)

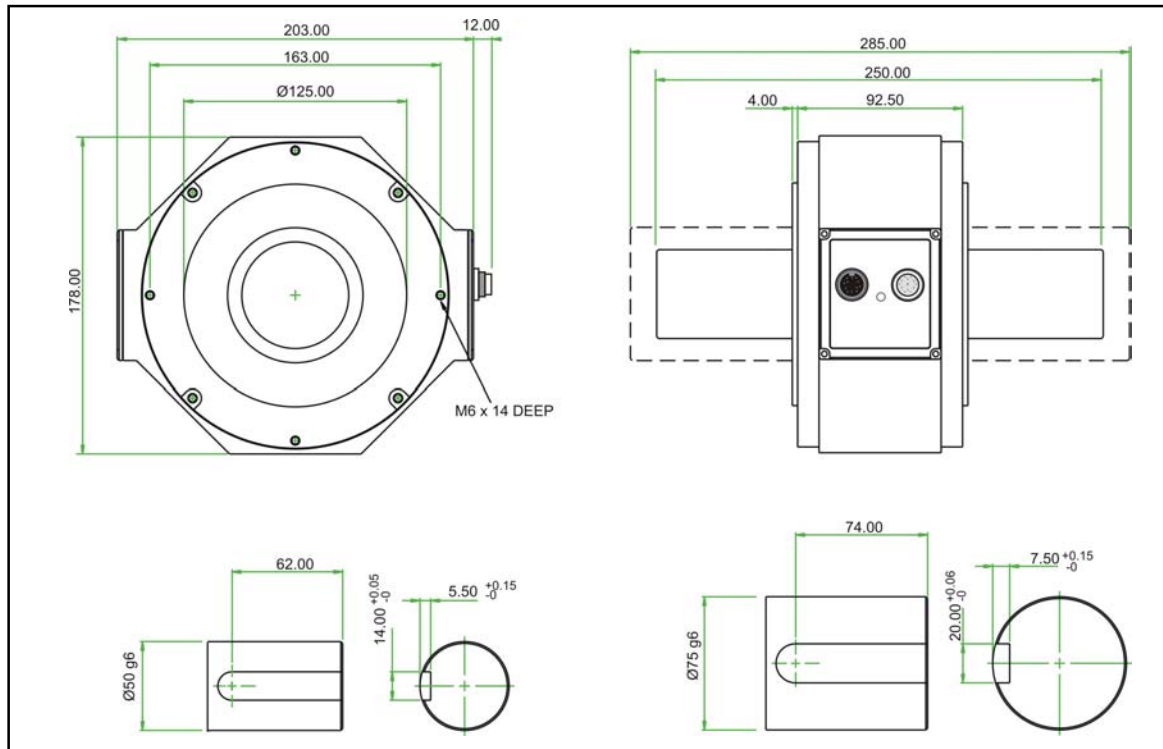

Parameter	Data									Units
Mechanical Properties										
Torque (Max)	650	850	1100	1350	2000	3000	4000	6000	10000	Nm
Shaft Code	GE	GA	GB	GC	GD	HA	HB	HC	HF	
Shaft Size (Diameter)	50					75				mm
Torsional Stiffness	TBC	TBC	199.2	TBC	214.1	TBC	TBC	914.4	945.5	kNm/rad
Mass moment of inertia	TBC	TBC	1330	TBC	1497	TBC	TBC	7932.7	9407.1	$\times 10^{-6}$ kg m ²
Max measurable load limit	120 (of rated torque)									%
Static safe load breaking	200 (of rated torque)									%
Shaft weight, approx	TBC	TBC	3.9	TBC	4.1	TBC	TBC	10.2	10.6	kg
Transducer with shaft weight, approx	TBC	TBC	7.1	TBC	7.3	TBC	TBC	13.4	13.8	kg

*Data parameters measured at +20°C
Sensor Technology Ltd reserves the right to change specification and dimensions without notice.*

RWT310/320 Series Torque Transducers - Standard Range

● – Standard feature ◇ – Optional feature

	RWT310/320 Series		Option Code	Remarks
Torque, Speed, Power Outputs	RWT310	RWT320		
Torque only	310	320		
Torque & Speed (60 pulses/rev)	311			User to specify RPM/FSD when ordering
Torque & Speed (360 pulses/rev)	312			Not yet available
Torque & Power (60 pulses/rev)	313			User to specify Power/FSD when ordering
Torque & Speed (60 pulses/rev) or Power		321		Outputs are user selectable
Torque & Speed (360 pulses/rev) or Power		322		Not yet available
Standard features				
Keyed Shaft Ends	●	●	K	1Nm will have flats
Voltage output $\pm 5\text{v}$ FSD (Fixed)	●		B	
Voltage outputs from $\pm 1\text{v}$ to $\pm 10\text{v}$ FSD and unipolar (Variable)		●		Output is user selectable
RS232 output		●		
Torque Averaging and Torque Peak		●		
Self Diagnostics	●	●		
Internal temperature measurement	●	●		Value available on RWT320 series only
Deep grooved shielded bearings with oil lubrication	●	●		
Ingress Protection (IP) 54	●	●		
Optional features				
Plain Shaft Ends	◇	◇	P	Shaft length will be longer than keyed end shafts – consult factory for length
Voltage output $\pm 1\text{v}$ FSD (Fixed)	◇		A	In place of Option B
Voltage output $\pm 10\text{v}$ FSD (Fixed)	◇		C	In place of Option B
Unipolar voltages (Fixed)	◇		U	In place of Option B. User to specify range/scale when ordering
Current output 0-20mA (Fixed)	◇		D	In place of Voltage output options
Current output 4-20mA (Fixed)	◇		E	In place of Voltage output options
Current output 12 \pm 8mA (Fixed)	◇		V	In place of Voltage output options
Current output 0-20mA, 4-20mA & 12 \pm 8mA (Variable)		◇	F	Current output is user selectable and in place of Voltage output. However user can reselect a Voltage output, if required. (Note 6)
USB 2.0 full speed 12 Mbps Digital output		◇	G	
CANbus output		◇	H	In place of RS232 output
High Speed Bearings (See Note 7 below)	◇	◇	J	Consult factory for maximum speed allowance.
Sealed Bearings	◇	◇	S	
Ingress Protection (IP) 65 (See Note 8 below)	◇	◇	L	

Note 6. 2 x analog channels available. Default settings are Channel 1 (voltage/current) – torque.

Channel 2 (voltage/current) – speed or power, if ordered.

Note 7. At very high speeds, for better balance the factory recommend plain or splined shafts.

Note 8. Transducers fitted for IP65 will have running speeds considerably reduced, increased drag torque and accuracy can be affected.

Data parameters measured at +20°C


Sensor Technology Ltd reserves the right to change specification and dimensions without notice.

RWT310/320 Series Torque Transducers – Connector and Lead Options

	RWT310/320 Series		Option Code	Remarks/Purpose
	RWT310	RWT320		
Connectors & Leads				
Analog Connector <i>12 Pin Lumberg (female)</i>	◇	◇	ACC 1	<i>For user to self wire</i>
Digital Connector <i>12 Pin Lumberg (male)</i>		◇	ACC 2	<i>For user to self wire</i>
Analog Lead (Length 2.5m) <i>12 Pin Lumberg (female) to 15 way 'D' type connector (female)</i>	◇	◇	ACC 3	<i>For connecting RWT to user's system via 15 pin 'D' connector</i>
Digital Lead (Length 2.5m) <i>12 Pin Lumberg (male) to 15 way 'D' type connector (male)</i>		◇	ACC 4	<i>For connecting RWT to user's system via 15 pin 'D' connector</i>
Digital Lead Adapter (Length 1m) <i>15 Way 'D' type (female) to RS232 and Power Connectors</i>		◇	ACC 5	<i>For connecting RWT to PC via RS232 [Also needs Digital Lead (ACC4) to connect to RWT]</i>
Digital Lead Adapter (Length 1m) <i>15 Way 'D' type (female) to RS232, USB and Power Connectors</i>		◇	ACC 6	<i>For connecting RWT to PC via USB (Option G) or RS232 [Also needs Digital Lead (ACC4) to connect to RWT]</i>
Digital Lead Adapter (Length 1m) <i>15 Way 'D' type (female) to CANbus and Power Connectors</i>		◇	ACC 8	<i>For connecting RWT to PC via CANbus (Option H) [Also needs Digital Lead (ACC4) to connect to RWT]</i>
Digital Lead Adapter (Length 1m) <i>15 Way 'D' type (female) to CANbus, USB and Power Connectors</i>		◇	ACC 9	<i>For connecting RWT to PC via USB (Option G) or CANbus (Option H) [Also needs Digital Lead (ACC4) to connect to RWT]</i>

RWT310/320 Series Torque Transducers – Additional related products

	Code	Remarks/Purpose
Transducer Display ETD	ETD	<i>Display readout</i>
AC Mains Adapter Power Supply	PSU 1	<i>For providing 12-32Vdc</i>
Transducer Signal Breakout Unit	SBU 1	
TorqView	TV	<i>Torque Monitoring Software</i>

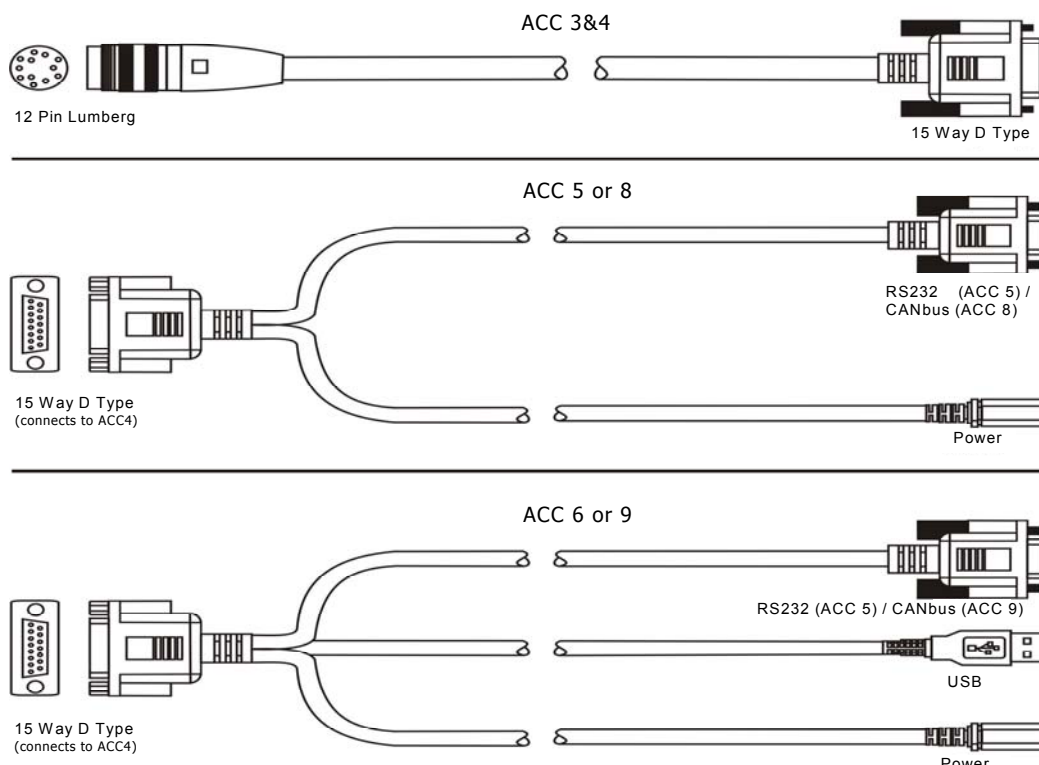

Data parameters measured at +20°C

Sensor Technology Ltd reserves the right to change specification and dimensions without notice.

When ordering a Torque Transducer please note that any torque/FSD is possible between ranges – please specify rated torque and options using the following format:

For example: RWT	311 - 15Nm -	K-CL	A 'basic' transducer with torque and speed outputs, rated and calibrated to 15Nm FSD with keyed ends, $\pm 10\text{v}$ and IP65 protection.
Your transducer requirement: RWT			
Max speed (if applicable)		RPM	
Connector & Lead options		(if applicable) <i>See over</i>	
Additional related products		(if applicable) <i>See over</i>	

Glossary of terms and definitions used in this datasheet

- **Surface Acoustic Wave (SAW)** - An acoustic wave travelling along the surface of a material having some elasticity, with amplitude that typically decays exponentially with the depth of the substrate.
- **Strain dependent SAW resonators** – A type of elastic SAW device, which changes its resonant properties when it is subjected to axial strain/compression. TorqSense uses this principle, which is protected by a number of patents.
- **Incremental Electronic Scan (IES)** – The most successful and precise method for interrogating strain dependent SAW resonators. The IES interrogation method uses a processor controlled frequency synthesiser to excite the SAW resonators over a defined range of frequencies and measure the reflected signal. TorqSense uses this patented method.
- **Resolution of the IES method** - The minimum measurable number corresponding to the stress/strain sensitive resonance point of the SAW resonator. The value is limited by following the factors:
 - frequency resolution of the synthesiser, which is 1000 times greater than overall resolution of the system.
 - relationship between frequency response and resolution. Increments of the resolution will proportionally decrease the system's frequency response. TorqSense systems are optimised for the best performance that suits most applications. However, on the RWT320 series models customers do have the capability to adjust the system performance.
- **Frequency response of the IES method** – The measure of the TorqSense system's response at the output to a signal of varying frequency at its input. The frequency response is typically characterised by the magnitude of the system's response, measured in dB. There are two ways of characterising the system's frequency response:
 - 0.1dB frequency range, where the output magnitude of the signal is different to the input magnitude of the signal by not more than 0.1dB (practically absolutely identical).
 - 3dB frequency range, where the output magnitude of the signal is 0.707 of the input signal. This is a common standard for most applications, unless it specifically says otherwise. This standard is also used to characterise the TorqSense system's frequency response.
- **Accuracy** - The degree of conformity of a measured or calculated quantity, which will show the same or similar results. Accuracy of the overall TorqSense system is limited by the combined error of several factors such as linearity, hysteresis, temperature drifts and other parameters affecting measurements. If errors in the system are known or can be estimated, an overall error or uncertainty of measurement can be calculated.
- **Digital averaging** – The application of algorithms to reduce white noise. In any electronic system, electronic white noise is mixed with the signal and this noise usually limits the accuracy. To reduce the influence of white noise and increase the accuracy of the system different averaging algorithms can be applied. In the TorqSense system a flying digital averaging technique is applied to reduce the white noise commensurate with the level of accuracy required. However, as any averaging algorithm works as a low pass filter, the more averaging that is applied the lower the frequency response. Therefore, each TorqSense system should be optimised to the customer's requirements by choosing the right combination of accuracy/frequency response. Please see relevant part of the Datasheet and User Manual.

Data parameters measured at +20°C

Sensor Technology Ltd reserves the right to change specification and dimensions without notice.