



Edelbrock Nitrous Systems Installation Instructions

P/N 73802 - 2 5/8" Nitrous Pressure Gauge




NOTE: Please consult the Edelbrock System Installation Instructions for the proper way to interact safely with Nitrous Oxide. Please take all safety precautions when working on any nitrous oxide injection system.

WARNINGS:

- *USE ONLY Teflon sealant for all tapered pipe threads. No sealant is required on AN flare fittings. Do not use any oil on threads.*
- *This gauge is supplied with a special restrictor fitting that **must** be installed on the braided line leading to the nitrous gauge.*
- *USE ONLY -4AN Teflon lined high-pressure stainless steel-braided line when installing this gauge. All fittings must have a minimum working pressure of 2000 psi.*

Mechanical Section

1. If you are not familiar with nitrous oxide systems and their installations, do not install this gauge. Have a qualified technician install it for you.
2. Determine where the nitrous gauge will be mounted and the source of the pressure (bottle outlet or nitrous solenoid inlet fitting). Then determine the length of steel-braided line required. This line must be purchased due to the vast number of applications this gauge is used in.
3. Secure the -4AN stainless steel-braided line to the back of the gauge using included female fitting.
4. Install gauge in desired location. Gauges can be mounted in under dash panels or on window cowling. Mounting cups can also be used (Auto Meter #3203 or #3204). Secure gauge with mounting bracket provided.
5. Make sure the nitrous bottle valve is closed and all lines are free of pressure.
6. Secure an in-line gauge adapter (not supplied) in a vice. Install the special restrictor fitting (supplied with gauge) in the in-line gauge adapter. Be sure to use liquid Teflon sealant on all tapered pipe threads for a good seal. No sealant is required on AN fittings. Do not over tighten as this may result in stripped threads or a broken fitting.
7. Remove the main nitrous feed line from the bottle or the nitrous solenoid. Install the in-line gauge adapter with the special restrictor fitting either on the nitrous bottle or nitrous solenoid. Re-install the main nitrous feed line. Install the braided line from the nitrous gauge to the restrictor fitting.
8. Reconnect all lines.
9. Open the nitrous bottle valve and check for leaks.

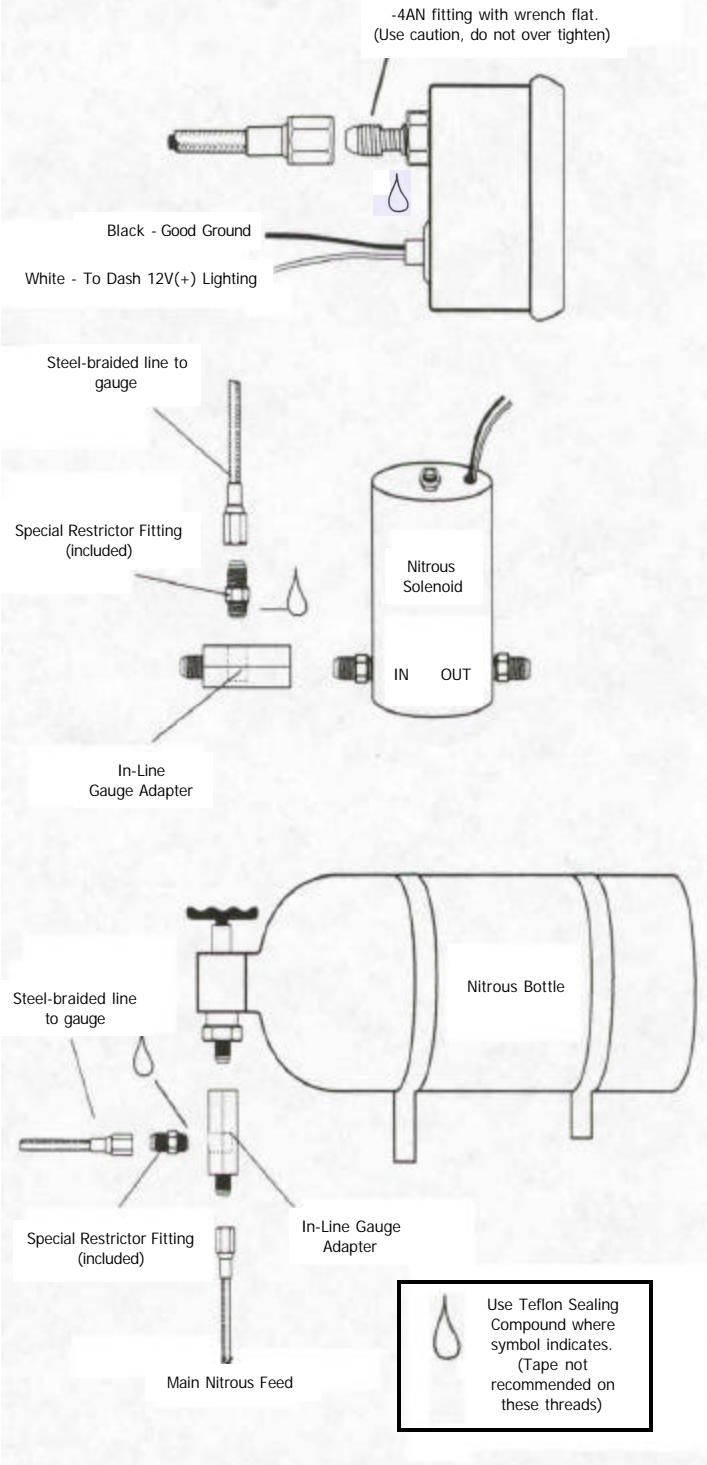



Bill Of Materials

<u>Qty.</u>	<u>Description</u>
1	0-1400 psi Nitrous gauge
1	Gauge light with harness
2	Star washers
2	Attaching screws
1	Gauge bracket
1	Red light cover
1	Green light cover
1	Special restrictor fitting
1	Female AN adapter

NOTES:

- If gauge mounting is other than in-dash or under dash, mounting provisions may have to be determined by the installer.
- Test all fittings and hoses for any leakage. If any leaks are detected, determine the cause of the leak and repair. Do not operate vehicle if any leaks are detected.

Electrical Section

For maximum electro-luminescent life, do not wire lighting to direct ignition switched 12-volt source. The lighting power source should be routed through OEM dash control, or a separate rheostat. Power can be achieved by tapping into the factory dash lighting through either the fuse panel or from a 12 volt dash light wire. This will allow you to control the light intensity. Use the appropriate connectors for your particular application. Connectors are not included due the vast number of applications. The white wire MUST be connected to the power source and the black wire to a good ground. Damage to electronic circuit could occur if connected incorrectly.

Edelbrock Corporation, 2700 California St., Torrance, CA 90503
 Tech Line (800) 416-8628
 Tech Hours: 7:00 am—5:00 pm PST, Weekdays