

*Bluetooth Loopset*



**User Guide**

[www.artonecs.com](http://www.artonecs.com)

Artone Communication Solutions

## Bluetooth LoopSet Instruction manual

Item no: **U& I - 03**

There are few easy steps you should go through, that will enable comfortable and easy communication with your **Bluetooth LoopSet**. First you must charge the **Bluetooth LoopSet**.

Initial charge takes about 3 hours (The procedure described below under title: *Charging...*)

The second stage is *pairing* your **Bluetooth LoopSet** with your Bluetooth compatible phone. (You can find the instruction for pairing under the title: *Pairing...*)

\*Get your phone user manual ready for instructions regarding new device add/search.


The third and last stage is learning your **Bluetooth LoopSet** functions and button usage.

(The instructions for this found under title: *Function Statement*.)

### User Manual


Unit Detailed description -----	1
Charging Bluetooth LoopSet-----	2
Pairing Bluetooth LoopSet-----	3
Function Statement-----	4
LED indicator statement-----	5
Specifications -----	6

## Unit Detailed description

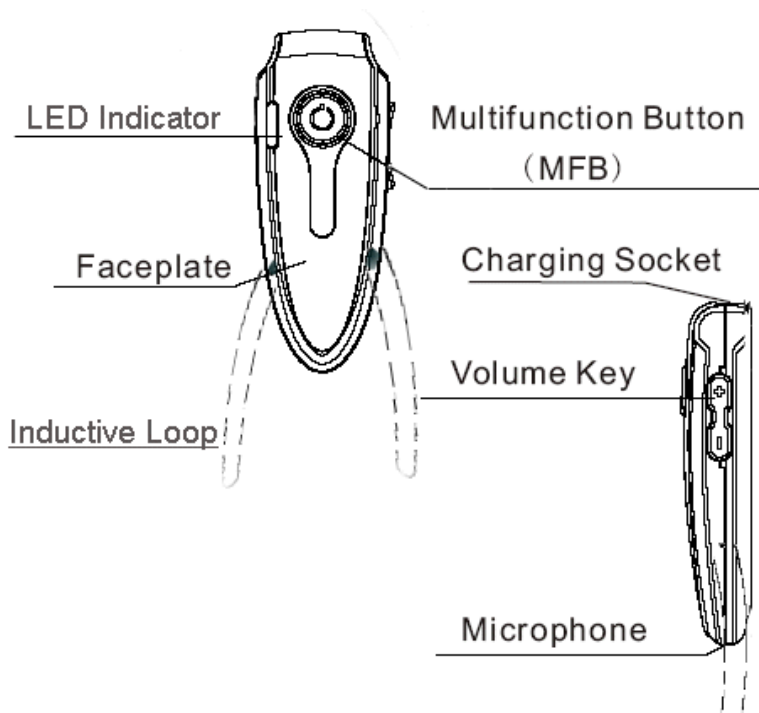

## Charging Bluetooth LoopSet

1. Connect the USB connection cord to the AC adapter socket. Connect the second end of the connection cord to the **Bluetooth LoopSet**. Plug the AC adapter to the wall AC socket (mains outlet).
2. When Charging, **LED** constantly flashes in red color. The LED will turn off automatically once the battery is full.
3. Normal charging time is 2~3 hours. Talking time is up to 8 hours / Standby time is up to 240 hours after fully charged.

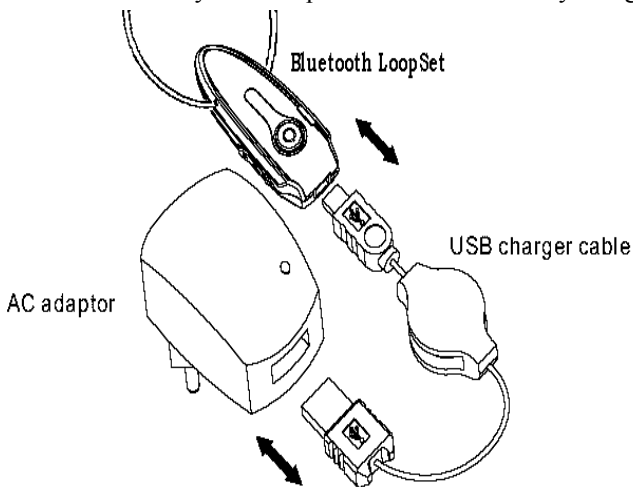

## Pairing Bluetooth LoopSet

**Note:** You must pair your Bluetooth LoopSet and the phone before making a call.

“Pairing” creates a link between devices with Bluetooth wireless technology and allows the phone to remember the LoopSet’s unique ID. When your LoopSet and phone are paired, your LoopSet automatically connects to your phone.

Put the Bluetooth LoopSet and phone close (within one meter) together:

(Turn the Loopset on – Press the MFB button until LED flashes blue color. Learn about all functions later in this manual under “Function Statement” title).

1. With the LoopSet on, hold the volume “+” Button for 2 seconds until LED flashes red and blue color in turn.
2. Perform a device discovery/search from the phone.
  - For details on device discovery for your phone, refer to the Phone’s users manual.
  - When scan is completed, the phone displays: **device found**.
3. Select the U&I-03 from the found devices list and confirm following the screen prompts. (follow the phone’s screen instructions)
4. When instructed by the phone, enter the passkey **0000** and confirm to pair the Bluetooth LoopSet with the phone. (The device ID is now stored in phone’s memory.)  
Pairing is successful when LoopSet indicator flashes rapidly.

## Function Statement

### **With the Bluetooth LoopSet and phone are paired:**

1. Turning on the LoopSet: Press the MFB button until LED flashes blue color.
2. Answering a call: When a call comes, press the MFB button to answer a call.
3. Ending a call: Press the MFB button to end the call.
4. Making a Voice Dial Call: Shortly press MFB button, speak the name to make the “voice dial” call. (Check instructions for voice dialing in phones manual.)
5. Redialing a Call: Long press Volume “ - ” button until you hear the beep, then release the button to redial out a call.
6. Rejecting a Call: Long press the MFB button until you hear the beep, then release the button to reject the call.
7. **Adjusting Bluetooth LoopSet Volume:**

**To increase output volume, repeatedly press “+” button until you reach the desired volume level.**

**\* For best volume performance please set your mobile phone to highest volume level.(Please refer to instructions in your phones manual).**

**To decrease output volume, repeatedly press “-” button until you reach the desired volume level.**

**Notice:** If the link abnormally disconnects (for example, out of range or phone power off), the loopset tries to reestablish the link. If the phone disconnects for over 20 minutes, the LoopSet will turn off automatically, you just turn on the Bluetooth LoopSet again and make the connection for the call.

Loopset Indicator LED	Status
Blue flashing	Standby mode before pairing
Red and Blue flashing in turn	Pairing mode
Blue flashing for continued 3 times	Standby after successful pairing
Blue flashing for continued 4 times	Connected (on a call)
Red flashing	Indicating low battery

## Specifications

Bluetooth Version	1.2
Operation Range	Up to 10meteres (33feet)
Frequency	2.4GHZ -2.4835GHZ ISM Band
Connection	Point to Point
Dimensions	L58mm, W23mm, H20mm
Loop perimeter	85cm
Weight	12g
Output Power	0dBm (class II)
Security	128 bits encryption
Battery	3.7V 150mA Li-polymer battery
Talking time	Up to 8 hours
Stand by time	Up to 10 days
Operating temperature	-10-55C
Storage temperature	-20-60C
Headset Pas key	0000
Car charger-	input 12-24v
Home charger	100 – 250V 50/60HZ
USB	Standard USB