



# **BUILT-IN UNDER COUNTER WINE CELLAR**

# **Top View**



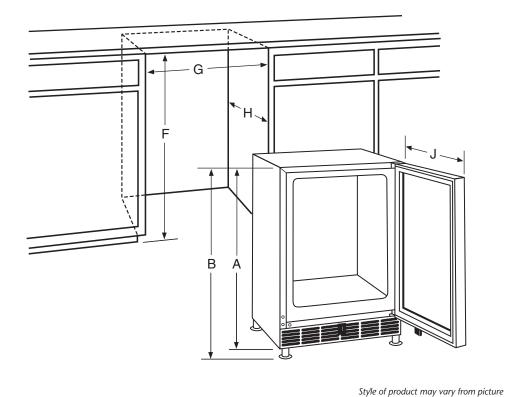

# PRODUCT DIMENSIONS

	INCHES	CENTIMETERS
Α	34	86.4
В	34 1/4 - 35	87.0 - 88.9
О	23 7/8	60.6
D	22	55.9
Ε¹	24 1/4	61.6
F	34 1/2 - 35 1/4	87.6 - 89.5
G	24	61.0
Ι	24	61.0
J	25 <sup>1</sup> / <sub>2</sub>	64.8

### **MODEL SKUs**

JWC2450ACX

# **NOTES:**

- 1. With 3/4" cabinet panel installed.
- 2. If door is recessed between cabinets, cabinet cutout must be 24 1/4" wide.
- 3. Door must open a minimum of 135 degrees to allow wine racks to pull out.

**Electrical requirements:** Provide for 120 VAC, 60 Hz. The unit must be properly circuit protected and wired according to local electrical codes.



# **BUILT-IN UNDER COUNTER WINE CELLAR PANEL**

# Back View Back View Predrilled pilot holes 10 places. Do not drill through wood frame Mounting Surface (non-face) side O Mounting Surface (non-face) side

### PRODUCT DIMENSIONS

For a 3 1/2" (8.9 cm) Toe Kick COVERS THE ENTIRE DOOR EXTRUSION

	INCHES	CENTIMETERS
Α	30 <sup>5</sup> /16	77.0

For a 4" (10.2 cm) Toe Kick TO MATCH EXISTING CABINET TOE KICK HEIGHT

	INCHES	CENTIMETERS
Α	29 <sup>13</sup> / <sub>16</sub>	75.7

Common Dimensions for Both Applications

	INCHES	CENTIMETERS
В	23 7/16	59.5
C	<b>15</b> 5/8	39.7
D	7 <sup>13</sup> /16	19.8
Е	22 1/2	57.2
F	15 <sup>5</sup> /32	38.5
G	7 <sup>13</sup> /16	19.8
Н	23/32	1.8

Style of product may vary from picture

# **NOTES:**

- A custom handle (not supplied) must be installed. Drill pilot holes through the custom panel to match the handle.
  Countersink the holes in the back of the panel. Attach the custom handle to the front door panel assembly.
  The custom handle screws should be installed through custom panel and into the custom handle. The screw heads should be countersunk so the inside panel surface can be installed flush with the wine chiller door.
- 2. Custom Wood Frame thickness: 5/8" (1.6 cm) 3/4" (1.9 cm).