



# **DAC-MON**

SDI distribution amplifier  
with composite analog monitoring output

## **User manual**

Rev. 3

## Nevion Support

### Nevion Europe

P.O. Box 1020  
3204 Sandefjord, Norway  
Support phone 1: +47 33 48 99 97  
Support phone 2: +47 90 60 99 99

### Nevion USA

1600 Emerson Avenue  
Oxnard, CA 93033, USA  
Toll free North America: (866) 515-0811  
Outside North America: +1 (805) 247-8560

E-mail: [support@nevion.com](mailto:support@nevion.com)

See <http://www.nevion.com/support/> for service hours for customer support globally.

## Revision history

Current revision of this document is the uppermost in the table below.

Rev.	Repl.	Date	Sign	Change description
3	2	2011-03-02	AA/ AJM	New template. Updated Materials declaration and Declaration of Conformity.
2	1	2007-10-15		New front page and removed old logo.
1	2	2007-09-10		Added Materials Declaration and EFUP; updated EC Declaration of Conformity.
0	A	2005-04-06		First official release; no changes from Rev.A.
A	-	2004-11-08		Preliminary release

---

## Contents

- Revision history ..... 2
- 1 Product overview ..... 4
- 2 Specifications ..... 5
- 3 Connector module ..... 6
  - 3.1 Correspondence of connectors and signals ..... 6
  - 3.2 Mounting the connector module ..... 6
- 4 Configuration and setup ..... 7
- 5 Module status ..... 8
  - 5.1 GPI alarm – module status outputs ..... 8
  - 5.2 Front Panel – Status monitoring ..... 9
- 6 Interface with GYDA and RS-422 command set ..... 10
  - 6.1 DAC-MON command table ..... 10
  - 6.2 The “?” command ..... 10
  - 6.3 The “info” command ..... 10
  - 6.4 Pedestal command ..... 11
  - 6.5 Get, set, eget and eset ..... 11
- General environmental requirements for Nevision equipment ..... 12
- Product Warranty ..... 13
- Appendix A Materials declaration and recycling information ..... 14
  - A.1 Materials declaration ..... 14
  - A.2 Recycling information ..... 14
- EC Declaration of Conformity ..... 15

## 1 Product overview

The DAC-MON is a high-quality SD distribution amplifier with 3 x SD digital and 3 x composite analog outputs. The SDI outputs are compliant to SMPTE 259M, and the composite analog outputs are PAL/NTSC compatible.

DAC-MON user monitoring can be performed via the GYDA control interface.

The DAC-MON is designed for all distribution and monitoring purposes in studio, duplication and Broadcast applications.

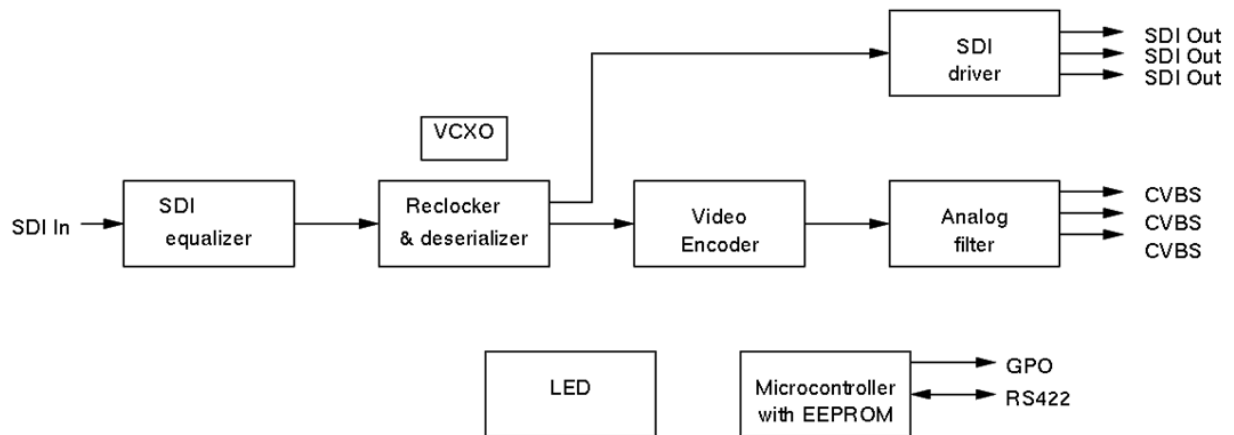


Figure 1 - Simplified block diagram of the DAC-MON card

## 2 Specifications

### Digital Serial Input

Signal:	4:2:2 SMPTE 259M-C, 270Mbps
Equalization:	Automatic
Impedance:	75 ohm
Return loss:	>15dB @ 270MHz
Signal level:	nom. 800mV
Connector:	BNC

### Digital Serial Output

Signal:	4:2:2 SMPTE 259M-C, 270Mbps reclocked
Connector:	BNC
Number of outputs:	3
Impedance:	75 ohm
Return loss:	>15dB @ 270MHz
Jitter:	max 0.2UI
Peak to peak signal level:	0.8V ± 0.1V

### Analog Output

Connector:	BNC
Impedance:	75 ohm
Formats:	Composite video, PAL 625/50 or NTSC 525/60
Signal level:	1Vp-p
Return loss:	>40dB up to 10MHz

### Processing Performance:

Signal path:	8/10 bits
Sampling:	27MHz
Video bandwidth:	5.5MHz
SNR:	>60dB typical

Power:	+5V DC / 2W
	-15V DC / 0.6W

### 3 Connector module

The DAC-MON has a dedicated connector module: DAC-MON-C1. This module is mounted at the rear of the sub-rack. The module is shown in Figure 2.

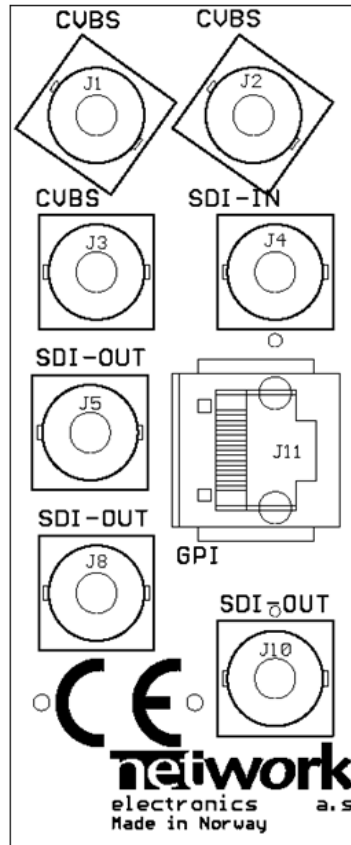


Figure 2 - DAC-MON-C1 connector module

#### 3.1 Correspondence of connectors and signals

The DAC-MON-C1 connector module has 7 BNC's:

CVBS	Analog output. CVBS.
CVBS	Analog output. CVBS.
CVBS	Analog output. CVBS.
SDI-IN	Digital SDI input
SDI-OUT	Digital SDI output
SDI-OUT	Digital SDI output
SDI-OUT	Digital SDI output

#### 3.2 Mounting the connector module

The details of how the connector module is mounted, is found in the user manual for the sub-rack frame FR-2RU-10-2.

This manual is also available from our web site: <http://www.nevion.com/>

## 4 Configuration and setup

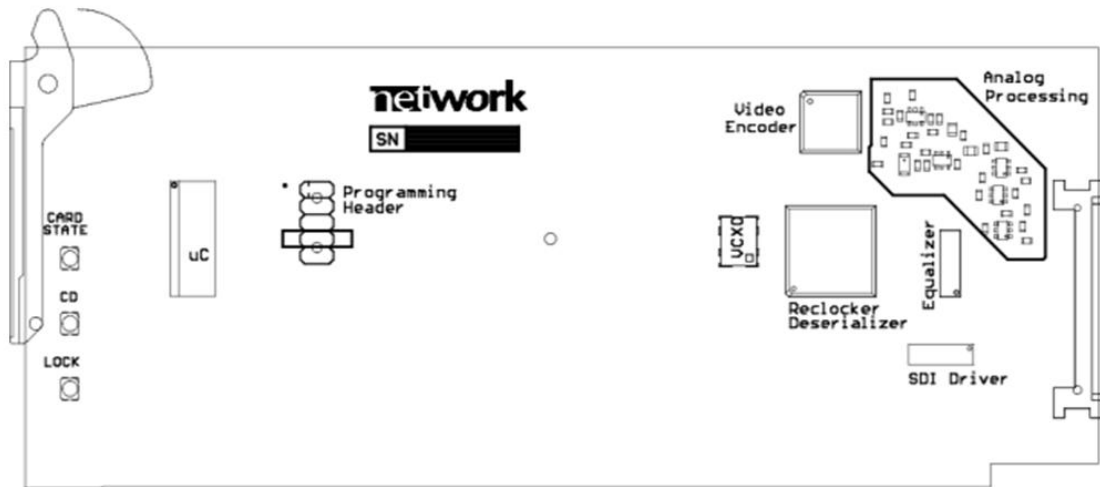


Figure 3 - DAC-MON simplified silkscreen

The DAC-MON card has no direct user settings available with DIP switches. Refer to the GYDA Interface for possible user settings with the card.

## 5 Module status

The status of the module can be monitored in two ways.

1. 1. GYDA System Controller (optional).
2. 2. LED's at the front of the sub-rack.

The LED's are mounted on the module itself, whereas the GYDA System Controller is a separate module which gives detailed information on the card status. The functions of the LED's are described on the next page. The GYDA controller is described in a separate user manual. This manual is available on our web site: <http://www.nevion.com/>

### 5.1 GPI alarm – module status outputs

These outputs can be used for wiring up alarms for third party control systems. The GPI outputs are open collector outputs, sinking to ground when an alarm is triggered. The GPI connector is shown in Figure 4.

#### Electrical Maximums for GPI outputs

Max current: 100mA

Max voltage: 30V

#### DAC-MON module GPI pinning:

Signal	Name	Pin #	Mode
Status	General error status for the module.	Pin 1	Open Collector
CD	No video input detected	Pin 2	Open Collector
LOCK	Module not gen-locked to video input	Pin 3	Open Collector
Ground	0 volt pin	Pin 8	0V.

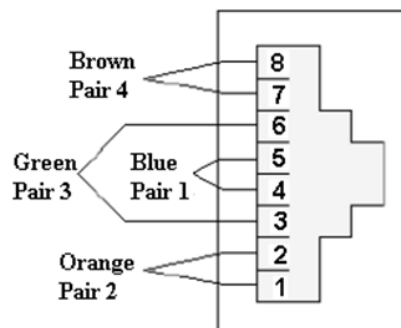


Figure 4 - GPI outlet



## 5.2 Front Panel – Status monitoring

The status of the module can be easily monitored visually by the LEDs at the front of the module. The LEDs are visible through the front panel as shown in Figure 5 below.

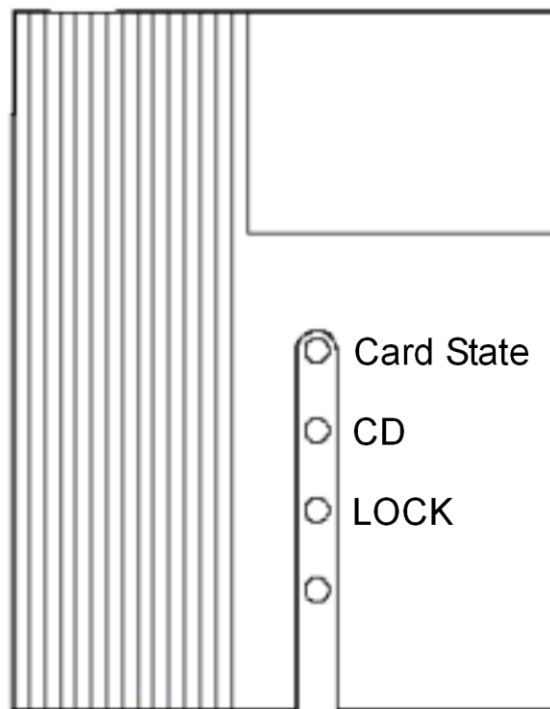


Figure 5 - Front panel indicator for DAC-MON

The DAC-MON has 3 LED's each showing status information. The position of the different LED's is shown in Figure 5.

Diode \ state	Red LED	Yellow LED	Green LED	No light
Card State	Module is faulty		Module is OK Module power is OK	Module has no power or memory fault
CD	No SDI video input (no Carrier Detect)		SDI video input is OK (Carrier Detected)	
Lock	Reclocker not in Lock	Reserved	Reclocker is Locked to SDI input.	

Table 1 - Front panel LED indicator overview

## 6 Interface with GYDA and RS-422 command set

All commands follow the flashlink protocol and can be used for direct control access to the module. The control system can either be a GYDA or a third-party control system with integrated flashlink protocol. The module can also be manually controlled with a VT100 compatible terminal program.

The protocol can be found on our web page; <http://www.nevion.com>

### 6.1 DAC-MON command table

Command	Response	Comment
?	Yes	The "Hello" command.
info	Yes	Gives back the card state.
Pedestal on	"OK"	Pedestal is present.
Pedestal off	"OK"	Pedestal is not present.
eget [0xHH]	Yes	Get a value from a numbered eeprom register.
eset [0xHH] [0xHH]	"OK"	Set a value to a numbered eeprom register.
get [0xHH]	Yes	Get a value from a numbered register.
set [0xHH] [0xHH]	"OK"	Set a value to a numbered register.

Table 2 - All commands available to the user

### 6.2 The "?" command

According to the Flashlink-protocol, no card can use the RS422-bus before it has been activated with the "?" (hello) command. The response from DAC-MON will be:

```
xxxxDAC-MON\
```

```
PIC sw rev X.X.X\
```

```
Protocol ver X.X
```

Here **xxxx** denotes the source and destination rack and slot coordinates, while **X** represents a version number. As of primo November 2004, these revisions would be:

```
xxxxDAC-MON\
```

```
PIC sw rev 1.0.0\
```

```
Protocol ver 1.0
```

### 6.3 The "info" command

This command report the entire state of the card. An example:

```
xxxxLocked 50Hz\
```

```
Pedestal on
```

Status of	Status string	Comment
Digital input.	Locked 50Hz	Locked to 625 lines 50 Hz.
	Locked 60Hz	Locked to 525 lines 60 Hz.
	Not locked	Not locked, output muted
Pedestal	Pedestal on	Pedestal is present when locked to 525.
	Pedestal off	Pedestal is not present when locked to 525.

Table 3 - The info command broken up in components

The "info" command is composed by many minor lines, fully specified in Table 3. In general, when a condition is normal, it is not reported. For instance, pedestal is reported when locked to 50Hz, even though the setting has no effect on the video.

## **6.4 Pedestal command**

Command to turn on/off the Pedestal is straightforward text, see Table 2.

## **6.5 Get, set, eget and eset**

These commands are for internal factory use. The end-user should avoid these commands.

## **General environmental requirements for Neviion equipment**

1. The equipment will meet the guaranteed performance specification under the following environmental conditions:
  - Operating room temperature range: 0°C to 40°C
  - Operating relative humidity range: <90% (non-condensing)
  
2. The equipment will operate without damage under the following environmental conditions:
  - Temperature range: -10°C to 50°C
  - Relative humidity range: <95% (non-condensing)

## **Product Warranty**

The warranty terms and conditions for the product(s) covered by this manual follow the General Sales Conditions by Nevion, which are available on the company web site:

[www.nevion.com](http://www.nevion.com)

## Appendix A Materials declaration and recycling information

### A.1 Materials declaration

For product sold into China after 1st March 2007, we comply with the “Administrative Measure on the Control of Pollution by Electronic Information Products”. In the first stage of this legislation, content of six hazardous materials has to be declared. The table below shows the required information.

組成名稱 Part Name	Toxic or hazardous substances and elements					
	鉛 Lead (Pb)	汞 Mercury (Hg)	鎘 Cadmium (Cd)	六价铬 Hexavalent Chromium (Cr(VI))	多溴联苯 Polybrominated biphenyls (PBB)	多溴二苯醚 Polybrominated diphenyl ethers (PBDE)
DAC-MON	○	○	○	○	○	○
O: Indicates that this toxic or hazardous substance contained in all of the homogeneous materials for this part is below the limit requirement in SJ/T11363-2006.						
X: Indicates that this toxic or hazardous substance contained in at least one of the homogeneous materials used for this part is above the limit requirement in SJ/T11363-2006.						

This is indicated by the product marking:



### A.2 Recycling information

Nevion provides assistance to customers and recyclers through our web site <http://www.nevion.com/>. Please contact Nevion’s Customer Support for assistance with recycling if this site does not show the information you require.

Where it is not possible to return the product to Nevion or its agents for recycling, the following general information may be of assistance:

- Before attempting disassembly, ensure the product is completely disconnected from power and signal connections.
- All major parts are marked or labeled to show their material content.
- Depending on the date of manufacture, this product may contain lead in solder.
- Some circuit boards may contain battery-backed memory devices.

# EC Declaration of Conformity



<b>MANUFACTURER</b>	Nevion Europe AS P.O. Box 1020, 3204 Sandefjord, Norway	
<b>AUTHORIZED REPRESENTATIVE (Established within the EEA)</b>	Not applicable	
<b>MODEL NUMBER(S)</b>	DAC-MON	
<b>DESCRIPTION</b>	SDI Distribution Amplifier with Composite Analog Monitoring Output	
<b>DIRECTIVES this equipment complies with</b>	Low voltage (EU Directive 2006/95/EC) EMC (EU Directive 2004/108/EC) RoHS (EU Directive 2002/95/EC) China RoHS <sup>1</sup> WEEE (EU Directive 2002/96/EC) REACH	
<b>HARMONISED STANDARDS applied in order to verify compliance with Directive(s)</b>	EN 55103-1:1996 EN 55103-2:1996	
<b>TEST REPORTS ISSUED BY</b>	<b>Notified/Competent Body</b>	<b>Report no:</b>
	Nemko	E06114.01
<b>TECHNICAL CONSTRUCTION FILE NO</b>	Not applicable	
<b>YEAR WHICH THE CE-MARK WAS AFFIXED</b>	2006	
<b>TEST AUTHORIZED SIGNATORY</b>		
<b>MANUFACTURER</b>	<b>AUTHORIZED REPRESENTATIVE (Established within EEA)</b>	<b>Date of Issue</b>
		2007-09-10
		<b>Place of Issue</b>
	Not applicable	Sandefjord, Norway
<b>Name</b>	Thomas Øhrbom	
<b>Position</b>	VP of Quality, Nevion (authorized signature)	



**NEVION EUROPE AS**  
O.nr. 976 584 201 MVA

<sup>1</sup> Administration on the Control of Pollution Caused by Electronic Information Products