

BI1215SOD • 15" Outdoor Crescent Ice Maker • Outdoor Series

FEATURES & BENEFITS



STAINLESS  
SOLID (LOCK)

PERFORMANCE	<ul style="list-style-type: none"><li>• Uses less than 3 gallons of water to produce up to 25 lbs of ice per day</li><li>• Up to 25 lbs in ice storage capacity</li><li>• Daily ice production rate is approx. 4 times greater than the average household refrigerator</li><li>• Crescent ice cube dimensions: 1/2" W x 3/4" H x 1/2" L</li><li>• On/Off switch is conveniently located on lower face of unit</li></ul>
INTERIOR/EXTERIOR	<ul style="list-style-type: none"><li>• No drain required</li><li>• Standard professional stainless steel handle is interchangeable with commercial handle accessory</li><li>• Full stainless steel cabinet and door are deemed suitable for outdoor use by UL</li><li>• Door swing is field reversible</li></ul>
INTEGRATION	<ul style="list-style-type: none"><li>• Unit is designed to be built-in or can be freestanding</li><li>• Four independently adjustable leveling legs provide a precise undercounter fit</li></ul>

MODEL DETAILS

Model	Voltage	Door Swing	Finish	Shipping Weight
U-BI1215SOD-00A	115	Field Reversible	Stainless Solid (Lock)	89 lbs


ACCESSORIES

Model	Description	Finish	Shipping Weight
23074	Professional Door Handle, 1 1/4" Diameter	Stainless	2 lbs
23073	Commercial Door Handle, 7/8" Diameter	Stainless	2 lbs

## Outdoor Series • 15" Outdoor Crescent Ice Maker • **BI1215SOD**

### DIMENSIONS


Dimensions shown apply to all finishes.

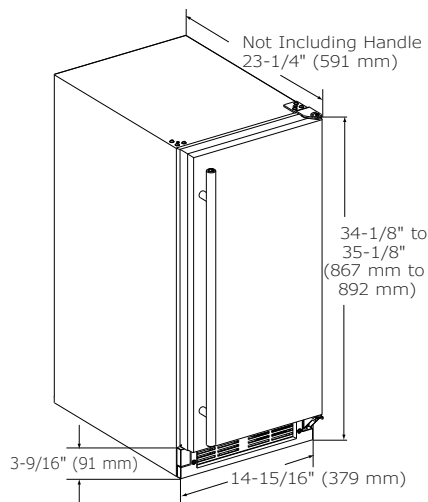

### SPECIFICATIONS

Model	BI1215SOD
Amps: Running	2.5
Control Type	On/Off Switch
Defrost Type	Manual
Dimensions: Depth	23 1/4" / 591 mm
Dimensions: Height	34 1/8" / 867 mm
Dimensions: Width	14 15/16" / 379 mm
ENERGY STAR	na
Ice Production Per Day	25 lbs
Ice Storage	25 lbs
Product Weight: Max	83 lbs
Refrigerant Type	R134a
Sabbath (Star K Certified)	No

### CABINET CUT-OUT

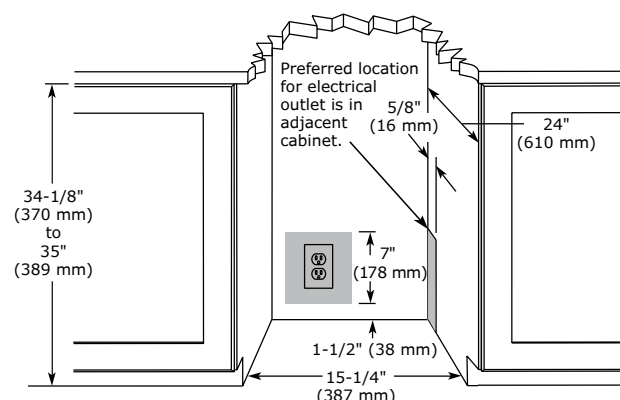

### INSTALLATION NOTES

When installing adjacent to wall, ensure 2-1/2" clearance on hinged side for 90° door opening, allowing ample room for door handle.

No additional clearance around sides, top or rear of unit is needed for ventilation.

Do not obstruct front grille air flow.

### ELECTRICAL REQUIREMENTS

This unit requires a grounded a polarized 115 VAC, 60 Hz, 15 A power supply (normal household current).



Please visit [u-line.com](http://u-line.com) to view this model's User Guide.  
All specifications are subject to change without notice.

Deemed suitable for outdoor use by UL.