

## HUSKY 2-YEAR LIMITED WARRANTY PROGRAM

The Home Depot warrants this Husky Power Product to the original user to be free from defects in materials and workmanship for a period of two years from the date of purchase. If you believe that this unit is defective during its original two-year warranty period, return the unit with proper proof of purchase to the Home Depot store or you may send the product to Husky Power Products at the address below.

This Husky Power Product is warranted, to the original purchaser only, to be free of defects in materials and workmanship for two years from the date of purchase without additional charge. The warranty does not extend to subsequent purchasers or users. Husky Power Products will not be responsible for any amount of damage in excess of the retail purchase price of the product under any circumstances. Incidental and consequential damages are specifically excluded from coverage under this warranty.

This product is not intended for commercial use. This warranty does not apply to accessories or damage to units from misuse or incorrect installation. Misuse includes wiring or connecting to improper polarity power sources.

**RETURN/REPAIR POLICY:** Defective products, other than accessories, may be returned postage prepaid to Husky Power Products. Any defective product, other than accessories, that is returned to Husky Power Products within 30 days of the date of purchase will be replaced free of charge. If such a product is returned more than 30 days but less than two years from the purchase date, Husky Power Products will repair the unit or, at its option, replace it free of charge.

If the unit is repaired, new or reconditioned replacement parts may be used, at Husky Power Product's option. A unit may be replaced with a new or reconditioned unit of the same or comparable design. The repaired or replaced unit will then be warranted under the terms of the remainder of the warranty period. The customer is responsible for the shipping charges on all returned items after 30 days. During the warranty period, Husky Power Products will be responsible for the return shipping charges.

**LIMITATIONS:** This warranty does not cover accessories, bulbs, fuses and batteries, defects resulting from normal wear and tear (including chips, scratches, abrasions, discoloration or fading due to usage or exposure to sunlight), accidents, damage during shipping to our service facility, alterations, unauthorized use or repair, neglect, misuse, abuse, failure to follow instructions for care and maintenance, fire, flood and Acts of God.

If your problem is not covered by this warranty, call our Technical Support Department at (954) 584-4446 or toll free at (800) 916-7004, for general repair information and charges if applicable.

**STATE LAW RIGHTS:** This warranty gives you specific legal rights. Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the exclusions or limitations stated herein may not apply. This warranty gives the purchaser specific legal rights; other rights, which vary from state to state, may apply.

**TO REQUEST WARRANTY SERVICE FOR THIS PRODUCT:** Contact Husky Power Products Technical Support by telephone or mail. We suggest that you keep the original packaging in case you need to ship the unit. When returning a product, include your name, address, phone number, dated sales receipt (or copy) and a description of the reason for return and product serial number. After repairing or replacing the unit, we will make every effort to return it to you within four weeks.

**WARRANTY ACTIVATION:** Please complete Warranty Activation Card and mail to Husky Power Products. Enter "HSK142" as Model and "Husky" Rechargeable Worklight" as Product Type. All Husky Power Product products must be registered within 30 days of purchase to activate this warranty. Mail the completed registration form, along with a copy of the original sales receipt to:

ATTN.: CUSTOMER SERVICE / HUSKY POWER PRODUCTS  
4140 SW 30th Ave., Ft. Lauderdale, FL 33312  
TOLL FREE: (800) 916-7004

WARRANTY IS NON-TRANSFERABLE AND NON-REFUNDABLE



BD071405

© 2005 VECTOR MANUFACTURING  
MADE IN CHINA



HSK142

## RECHARGEABLE WORKLIGHT

**IF YOU SHOULD EXPERIENCE A PROBLEM WITH YOUR HUSKY PRODUCT CALL TOLL FREE (800) 916-7004. IN MOST CASES A HUSKY SERVICE REPRESENTATIVE CAN RESOLVE YOUR PROBLEM OVER THE PHONE.**

### KEY INFORMATION YOU SHOULD KNOW:

- **OPERATE: SIMPLE, TWO-POSITION PUSHBUTTON**
- **CLAMP/HOOK ASSEMBLY INCLUDED**
- **AC AND DC CHARGER/ADAPTERS INCLUDED**
- **WORKLIGHT CAN ALSO BE USED AS A DC POWER SOURCE**



## USER'S MANUAL AND WARRANTY INFORMATION

THIS MANUAL CONTAINS IMPORTANT INFORMATION REGARDING SAFETY, OPERATION, MAINTENANCE AND STORAGE OF THIS PRODUCT. READ CAREFULLY BEFORE USE, AND RETAIN FOR FUTURE REFERENCE.

4140 S.W. 30th Ave., Ft. Lauderdale, FL 33312  
Toll Free: (800) 916-7004

**THIS UNIT IS SHIPPED IN A PARTIALLY CHARGED STATE. UPON RECEIPT, IMMEDIATELY CHARGE THE BATTERY FOR 25 - 30 HOURS USING THE SUPPLIED AC CHARGER. RECHARGE AFTER EACH USE.**

## **IMPORTANT SAFETY INFORMATION**

**PLEASE READ INSTRUCTION MANUAL COMPLETELY FOR ALL SAFETY AND WARNING INSTRUCTIONS.**

### **WARNINGS**

- NEVER operate the worklight during AC or DC charging.
- The worklight contains a non-spillable, sealed, lead acid battery and must be recycled or disposed of properly. Any disposal questions call toll-free (877) 288-7722.
- DO NOT expose worklight to fire or intense heat, as this may result in an explosion.
- DO NOT open battery compartment or short circuit, as this may cause the battery to leak or get hot, causing personal injury.
- USE ONLY THE CHARGERS PROVIDED WITH UNIT.
- AFTER CHARGE, disconnect and wait 5 minutes before use.
- DO NOT OVERCHARGE: AC charge 25 - 30 hours maximum.  
DC charge 2 - 3 hours maximum.

### **CAUTIONS**

- 1) Do not substitute power cords or adapters. Do not use extension cords. ONLY recharge with supplied AC and DC charge adapters.
- 2) Do not submerge in water. This unit is not waterproof - it is weather resistant.
- 3) Do not operate worklight while recharging. This will prevent battery recharge and overheat the charging adapters.
- 4) Worklight lens gets very hot when ON. Do not touch lens - keep children away from worklight. *This is not a toy!*
- 5) Keep worklight from flammable material - extreme heat can cause fire.
- 6) Keep sharp objects away from breakable lens.
- 7) Do not drop or throw worklight, it contains glass and a sealed lead-acid battery.
- 8) Do not crush, cut, pull or expose accessory cords to extreme heat.
- 9) Position recharge cords away from sharp edges so they do not become a safety hazard by becoming entangled.

## **1. INTRODUCTION**

Congratulations on purchasing the **Husky™ Rechargeable Worklight**. The worklight includes a clamp and hook making it easy to position the worklight for hands-free operation.

The rechargeable, non-spillable, sealed 12 volt lead-acid battery will provide years of dependable use recharge after recharge. The HSK142 worklight is a versatile, practical and a perfect choice for travel, camping, picnicking, tailgate parties and boating.

The worklight includes one AC charger/adaptor and one 12 volt DC charger for recharge flexibility for use around home, business or in the field. 12 volt DC power is available from most vehicles, boats, jump starters and portable battery packs.

## **2. FEATURES**

- Corded, Cordless and Rechargeable for portability
- Powerful 25 watt quartz halogen bulb
- Clamp and hook adapter for versatile mounting options
- The worklight also functions as a 12-volt DC portable power supply
- Worklight head swivels and tilts for exact light placement
- Rubber safety guard (bezel) and plastic cage protect the worklight
- Toggle power switch – ON/OFF



Figure 1. AC Charger Adapter



Figure 2. DC Charger Adapter

### 3. OPERATION

Never operate the worklight during charging.

A two-position ON/OFF toggle switch controls the operation of the worklight. The worklight can be continuously lit for up to 40 minutes on a full battery charge

The worklight head swivels 180 degrees up and down, to accommodate most any lighting situation. To release the swivel head from a locked position, simply rotate the thumbscrew counter-clockwise to loosen. Then position the swivel head in the desired position and tighten the thumbscrew to hold in place.

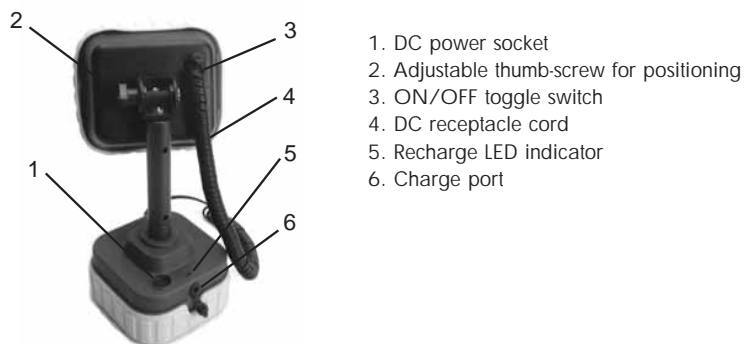


Figure 3. Location Diagram

### 4. AC CHARGING

Make sure the AC source is 120 volts, 60 Hz (a simple wall receptacle is 120 volts).

The worklight can be operated by its own stored power or with the coiled cord plugged to a DC power source.

#### DO NOT OPERATE WORKLIGHT WHILE CHARGING

1. Lift the rubber plug from the charge port (6) on the worklight base.
2. Connect the AC charger/adapter to the recharge port.
3. Connect the AC charger/adapter to an AC power source or household wall receptacle.
4. Charge for 25 - 30 hours. Red LED will light to indicate charging and will flash to indicate a full charge.
5. After charging, disconnect the AC charger adapter from the power source and the charge port and store the adapter.
6. Replace the rubber plug in the charge port to keep out dust and moisture.

An additional benefit of the worklight is the utility value of the clamp and hook accessory shown in Figure 5. Utilizing this accessory provides many mounting (positioning) options that will allow hands-free operation.

The most simple way to remove the lamp from the base:

1. Holding the lamp head (1) in place, rotate the base (3) of the unit counter-clockwise.
2. Separate the Threaded Bolt (4) from the Threaded Bolt Hole (5).

**NOTE:** The Thumb-Screw assembly (2) may be removed, but is not recommended.

Attach the clamp and hook assembly to the lamp head (1) as follows:

1. Loosen the Clamp Thumb-Screw (5) and remove the Clamp Nut (6).
2. Align the Clamp Thumb-Screw (5) of the clamp and hook assembly with the Threaded Bolt Hole (3) of the lamp head, and tighten well.

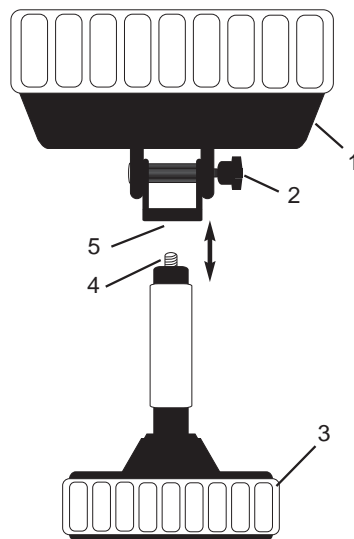


Figure 4. Lamp Assembly

1. Lamp Head
2. Thumb-Screw Assembly
3. Lamp Base
4. Threaded Bolt
5. Threaded Bolt Hole

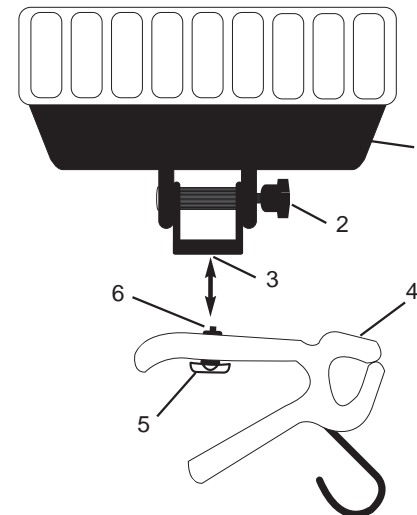


Figure 5. Clamp and Hook Assembly

1. Lamp Head
2. Lamp Thumb-Screw
3. Threaded Bolt Hole
4. Clamp and Hook Assembly
5. Clamp Thumb-Screw
6. Clamp Nut

## 5. DC CHARGING

**WARNING:** Use ONLY the supplied DC charge CORD; do not substitute. DC charge requires the use of the supplied DC adapter.

1. Connect the barrel connector of the DC charge cord to the worklight's DC receptacle (4) and the other end to a 12 volt DC source, such as your automobile's 12 volt accessory receptacle.
2. Recharge for 3 hours maximum. Do not overcharge. There is no indicator to show full charge.
3. After charge - disconnect cord and wait 5 minutes before use.

## 6. FUSE REPLACEMENT

The worklight is equipped with a coiled cord with a 5-amp fuse. If this fuse blows, there may be a short circuit in the power cord or lamp assembly. The fuse will blow if the battery is connected with reverse polarity.

Check the fuse with an ohmmeter or other continuity checker. If the fuse is blown, investigate why the fuse blew and correct the problem before replacing the fuse. The fuse is accessed by unscrewing (counterclockwise) the tip of the large DC plug. Ensure the same type and value fuse is used as replacement.

## 7. BULB REPLACEMENT

**NOTE:** When handling a new halogen bulb, use a clean tissue, do not touch the glass portion of the bulb. Natural oils from your hands can cause the bulb to fail. If necessary, clean the bulb with alcohol or a liquid window cleaner.

For bulb replacement, you will need a small Phillips screwdriver.

1. Disconnect the worklight from any charging/power source.
2. Remove the rubber bezel by pulling it away from the lamp lens.
3. Remove the four Phillips-head screws that secure the lens guard to the worklight body.
4. Carefully separate the lens guard, glass and rubber gasket.
5. Carefully lift the reflector and bulb assembly out of the housing. See Figure 6.
6. Unsnap the retaining wire from the reflector's flange by pinching the two ends together and lifting.
7. Loosen the Phillips-head retaining screw to remove the bulb assembly from the reflector. (There is no need to completely remove this screw.)
8. Slightly turn and lift out the bulb assembly from the back of the reflector.
9. Disconnect the bulb assembly (white wire) from the power wire by separating the male spade terminal from the female terminal.
10. Insert the replacement H3, 25-watt, 12-volt halogen bulb assembly into the reflector flange.
11. Reverse the proceeding procedure to reassemble the worklight.

Replacement worklight bulb assemblies are available from an electrical supply house. You may also call Husky Power Products toll free (800) 916-7004.

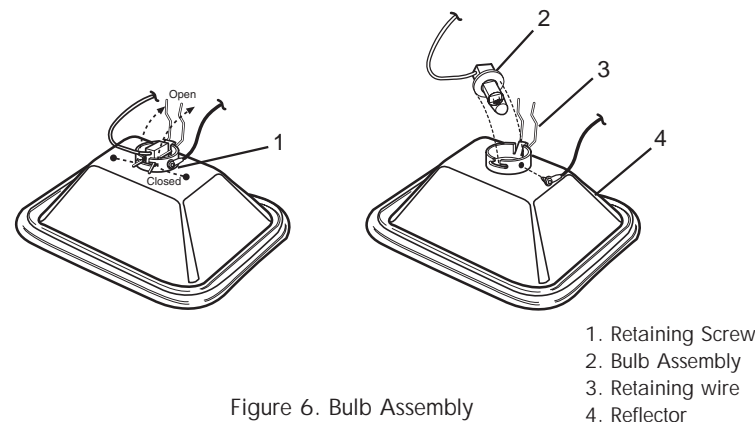


Figure 6. Bulb Assembly

## SPECIFICATIONS

Battery	12 Volt, 3 Amp Hour, Sealed, Lead-Acid.
12 Volt Power Outlet	with 10 - 12 Amp Automatic Breaker
AC Adapter Charging Time	.25 - 30 Hours. Charging Indicator LED will flash to indicate full charge.
AC Charging Adapter	12 volt 300mA
DC Charging Cord	2 Male End Plug
Coiled Cord	.6 Feet with 5 Amp Fused Plug
DC Charging Time From Vehicle	.Approximately 2 - 3 Hours. No Full Charge Indicator
Bulb	12 volt, 25-watt quartz halogen
Beam Discharge time	.Approximately 40 Minutes.