


DB-1

Passive Direct Box

The DB-1 is one of the most useful and versatile tools available — indispensable in enabling easy interfacing and connection between various audio gear in numerous applications.

- Perfect for all live sound permanent installations, club, church and practice PA systems, monitor systems, home and project recording studios, karaoke and DJ sound systems
- Enables the connection of any unbalanced audio source signal (such as from an electric instrument, keyboard—even from an amp speaker output) to any mic level balanced input (such as that of a mixer).
- Parallel Output allows simultaneous connection to 2 separate inputs (such as to an amp and mixer)
- Translates high-impedance instrument outputs into low-impedance balanced signals or balanced low-impedance signals into unbalanced outputs
- Converts unbalanced +10dB DJ mixer signals to balanced mic level signals, enabling both easier interfacing with consoles and longer cable runs
- Enables multiple keyboard setups plugged into an instrument amp to be directly input to a console mixer by connecting the speaker outputs of the amp to the console input through the DB-1, thus eliminating the need for a direct box on each keyboard.
- 3-position input attenuation switch (0dB, -20dB, -40dB) facilitates proper output signal levels for optimum level matching to connected equipment
- Switchable ground lift eliminates ground loop hum problems
- Rugged, roadworthy all-steel construction for years of continuous reliability

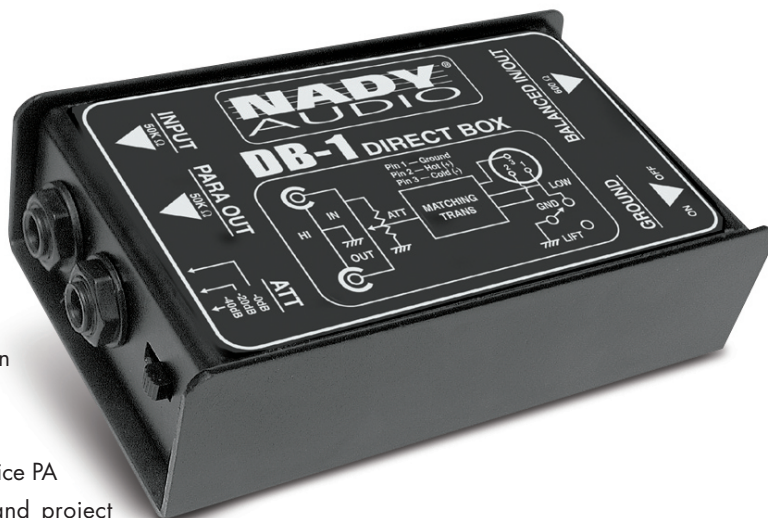

SPECIFICATIONS

Input Attenuation	Switchable (0dB, -20dB, -40dB)	Ground Lift	Switchable ground lift
Instrument Input	50K Ω unbalanced TS jack	Construction	All steel chassis
Parallel (Link) Out	50K Ω unbalanced TS jack	Size	4.75" x 3" x 1.5" (127 x 76.2 x 31.75mm)
Balanced Output	600 Ω balanced XLR jack	Weight	1.20lb

SERVICE

(U.S.) Should your Nady DB-1 Passive Direct Box require service, please contact the Nady Customer Service Department via telephone: (510) 652-2411 or e-mail: service@nady.com.

(INTERNATIONAL) For service, please contact the Nady distributor in your country through the dealer from whom you purchased this product.

The warranty card supplied with this system provides valuable warranty and service information. Store it in a safe place for future reference. Do not attempt to service this unit yourself as it will void your warranty.



NADY SYSTEMS, INC.

6701 Shellmound Street • Emeryville, CA 94608 • Tel: 510.652.2411 • Fax: 510.652.5075 • www.nady.com