
GPSmile 55 Portable Automobile Navigation System

Quick Start Guide

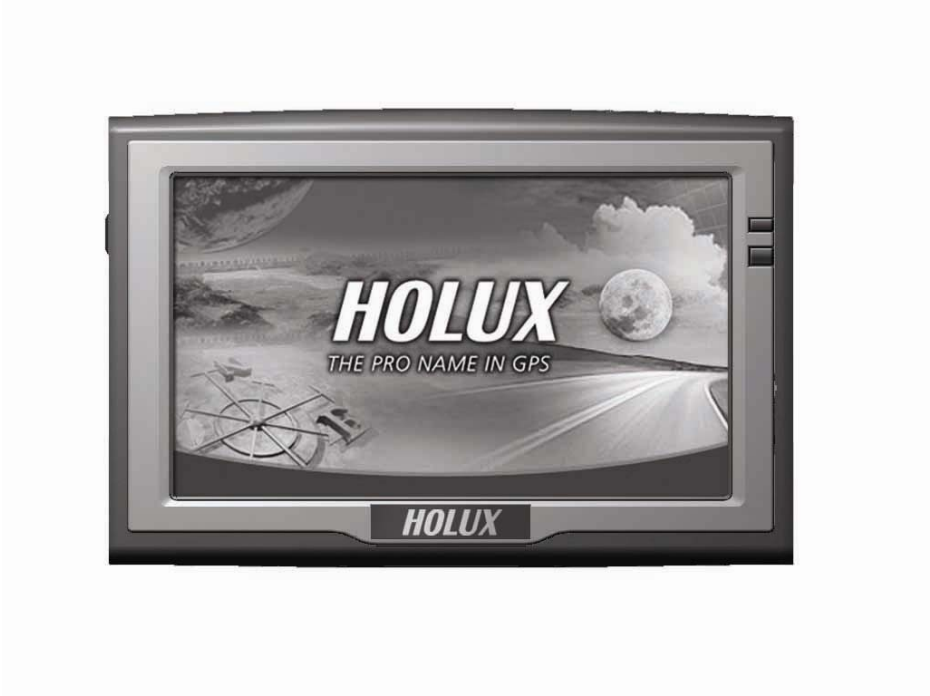

Version: V1.0

March 2007

Registered info

HOLUX and GPSmile are trademarks of HOLUX Technology, Inc.

All other trademarks belong to registered companies.

Note

- The contents of this manual will be modified without further notice.
- The operation temperature for the product is between 0℃~40℃.

Operating or recharging in an environment with a temperature over 45℃ might cause the system to stop functioning. However, this should be considered a normal phenomenon. Please do not operate under extreme temperatures.

Operating Methods

Startup

1. For first time use, please turn the system power switch at the rear side **On**.
2. Press and hold the power button for about two seconds to turn on the power.

Note: Before using for the first time, please switch the system power on.



Shutdown

1. While the power is on, press the power button to turn the power off.
2. If the unit will not be used for a long time, turn the system power switch at the rear side **Off**.



Using the Vehicle Bracket

The included vehicle bracket set can be securely mounted on the front windshield, or secured on top of the glove compartment using the adhesive plate. This device will effectively secure the GPS unit in the vehicle. Follow the procedures below to secure the bracket:




1. Follow the arrows and slide the unit into the in-vehicle bracket fitting holes to secure.
2. Gently push down until the unit is tightly fixed with the bracket.



Note: Please note the directions of the arrows. When secured, the assembly should be tight. If these directions are not followed, a loose fit will result, and components must be reassembled.

3. Bend the bracket support to a proper angle. Securely mount the vehicle bracket to the windshield, ensuring its base is resting firmly on the dashboard.



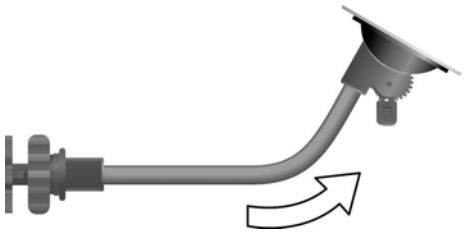



4. Follow the directions, insert the bracket into the slots on the bracket, and slide to fix the set **(A → B)**.



5. The in-vehicle bracket assembly is complete.

   ✓ When using the in-vehicle secure bracket, do not install it in a location that will block the view of the driver


   ✓ Recommended installation requirements:

   The bracket base should rest securely on the dashboard to prevent excessive shock.

Using the Car Charger

While using the device in a vehicle, use the included car charger for long periods of usage.

1. Plug the small plug into the power jack on the rear of the in-vehicle bracket.
2. Insert the other end into the cigarette lighter.

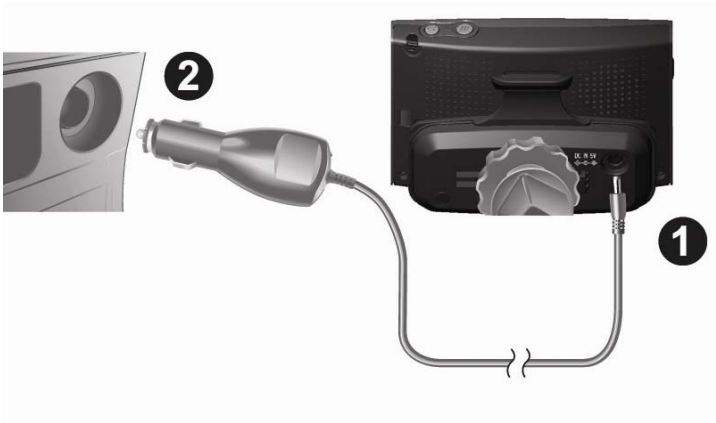

System Reset

It will only be required to reboot the system under extremely few circumstances. Reset your system if the following situations occur:

1. Heavy lag experienced when refreshing screens or operations, which result in an inoperable system.
2. Cannot turn off the system with the power button.
3. No response after a selection is made on the screen.



If any of the above occurs, turn the system power switch at the rear side **Off and turn it back On** to reboot the system.

Main Menu

During the first startup, the screen will show the main screen consisting of four functions: navigation, music, photo, and settings. Directly select an icon on the screen to use that function.



GPS	Loads the navigation program and navigation screen **Note:** If an SD card with navigator software is inserted, the system will enter the GPS function automatically after startup.
MP3	Plays MP3 music
PHOTO	Plays images
VIDEO	Plays video
eBook	Can read file with __txt format
SETTING	System setup