



HDMI Switch Box

3 input / 1 output

Model 33-11105



FEATURES AND CONTENTS

For the best performance of this switch box, please read this manual carefully and keep it for further information.

Features:


- Support 1080P HDTV
- HDCP Compliant
- DTS-HD, Dolby TrueHD lossless compressed digital audio Compliant
- One input port located at front panel for portable devices
- IR Remote Control
- Manual control
- Auto switching
- Expand 3 HDMI sources on your HDTV devices
- Plug-and-Play, installs in seconds

Content of Package


- 5VDC power adaptor
- Remote control unit
- HDMI 3-IN-1-OUT switcher
- User's Manual

ILLUSTRATION


Front Panel

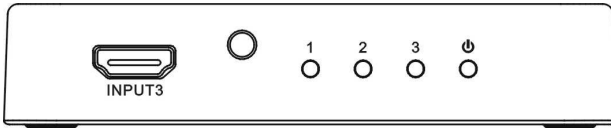

Rear Panel

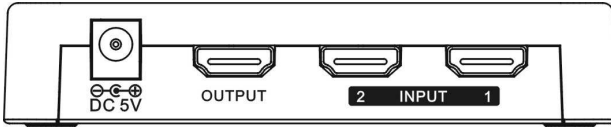

CONNECTION ILLUSTRATION

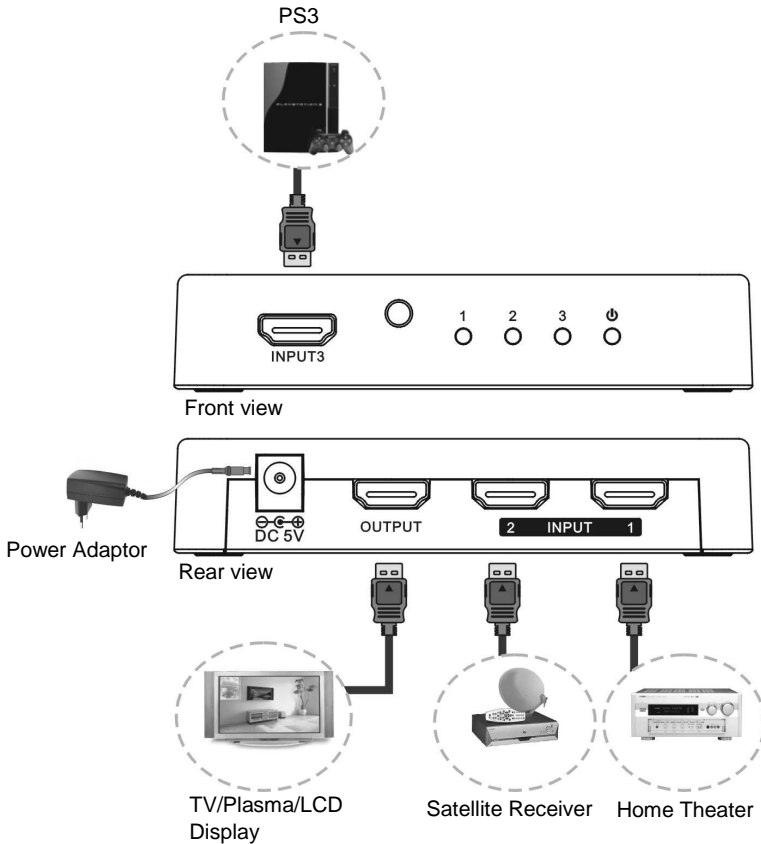

CONNECTION & OPERATION

Connection

Step 1:

Connect the HDMI cables from the HD sources (PS3, DVD player) to the input ports of the HDMI Switcher.

Step 2:

Connect the HDMI cable from your HD display (monitor or projector) to the output port of the HDMI Switcher.

Step 3: Plug the 5VDC power adaptor to the HDMI Switcher.

Step 4: After you finish the connection, the power indication LED (red) will be lighted on. And one of the input indication LEDs (green) will be light on.

Note:

1. The SELECT button can also be used as a POWER ON/OFF button. Press the button for 3 seconds to turn on or off the power.
2. If you see the power indication LED light (Red) is flashing, the HDMI switcher is detecting and connecting to the source. After the source is detected and connected, the flashing will stop.
If the flashing continued, please check the power of your source is on, or check the HDMI cable is working fine.
3. The HDMI switcher will memorize the latest input port.

Operation

IR Remote Control operation mode


Use the IR remote controller to turn on the power of HDMI switcher, the power indication LED on the front panel will light on. In the IR remote control mode, use number button to toggle between sources, or you can use the forward and back button to select input sources.

Manual Operation mode

This box can be use manually; the "POWER/SELECT" key is used for manual switch. If you want to change the input channel, you can only press the button once. There will be a LED indication for what channel it is.


The procedure is a cyclic function

When you selected the channel, there will be a LED on to present the channel. If you select channel 1, the "1" LED will light on.



Auto detect function Operation mode

For your first connection, the HDMI switcher will detect and connect to the first available source by following sequence.



To switch to another source, you will only need to turn on the source device you want to use. The HDMI switcher will automatically switch to the source device which you turn on.

Note:

- 1. The latest powered on HDMI source device will be selected as input source.**
- 2. If the auto switching function is not functioning due to varied design of HDMI source devices, please use remote control or manual control to switch between input devices.**

TROUBLE SHOOTING

- When there is no picture present, please:
 - Check all connectors connect well or not.
 - Check the connecting cable is damaged or not
 - Check the power of HDMI Switcher (or reset the switcher)
- When there is only picture displayed and without sound:
 - Check the cable connection to see if it fits properly.
 - Check your cable to see if it supports video transmission only (DVI) or it is damaged.
 - HDCP may not match very well at first connection; please reset your HDMI switcher.
 - If you connect any output to your video recorder, the HDCP may automatically lock up audio part. Please make sure the video recorder support HDCP.
- When resolution could not show in 1080p?
 - Make sure the content, sources device (HDMI DVD Player), HDMI cable and displays (TV) are fully supporting 1080p.
 - Make sure your HDMI cables are capable of transmit 1080P video signal.

NOTICE

- MCM Electronics and Stellar Labs reserve the right to make changes in the hardware, packaging and any accompanying documentation without prior written notice.
- HDMI, the HDMI Logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC.
- Trademarks and brand names are the properties of their respective owners.

Warranty

MCM Electronics warrants to the original purchaser that this product will be free from defects in materials and workmanship for a period of 90 days. In the event that warranty replacement is required, the unit will be replaced or repaired at the sole discretion of MCM Electronics. Warranty claims must be processed through the MCM Electronics customer service department.

This warranty does not include service or parts to repair damage caused by accident, disaster, misuse, abuse, or improper installation. This warranty is in lieu of all other expressed warranties. If the product is defective in materials or workmanship as warranted above, the purchaser's sole remedy shall be repair or replacement as provided above. In no event will MCM Electronics be liable for any incidental or consequential damages arising from the use of this product.

Stellar Labs™

© 2010 MCM Electronics

www.mcmelectronics.com