

# EX-G048B

## 2-port DVI Splitter

### Datasheet



## Safety and Notice

The **EX-G048B 2-port DVI Splitter** has been tested for conformance to safety regulations and requirements, and has been certified for international use. However, like all electronic equipments, EX-G048B should be used with care. Please read and follow the safety instructions to protect yourself from possible injury and to minimize the risk of damage to the unit.

- Follow all instructions and warnings marked on this unit.
- Do not attempt to service this unit yourself, except where explained in this manual.
- Provide proper ventilation and air circulation and do not use near water.
- Keep objects that might damage the device and assure that the placement of this unit is on a stable surface.
- Use only the power adapter and power cords and connection cables designed for this unit.
- Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.

## Introduction

The EX-G048B receives and reconstructs (equalizing & reclocking) a DVI signal and distributes it to two identical outputs. It can be perfectly cascaded with one another in order to obtain more DVI outputs (at least 6 tiers). Each output can be turned on/off individually through an IR remote control (optional). It will also process (read & store) the EDID information sent through the Data Display Channel (DDC).

## Features

- Connects a DVI video source to 2 DVI compatible displays
- Perfectly as a repeater by regenerating the DVI signal
- Stackable, 6 devices stacked can support up to 13 outputs
- IR remote control allows switching outputs (optional)
- Reads and remembers the EDID of displays
- Can be modified EQ with two modes
- Extends greater than 14m/45ft of input/output DVI cable

## Package Contents


- 1x EX-G048B
- 1x 5V DC power adapter
- 1x User Manual
- 1x Remote Control (optional)

## Technical Specifications

- Input connector: 1 x DVI-I
- Output connector: 2 x DVI-I
- Maximum Resolution: 1600 x 1200
- LEDs: 1 x Green (ID), 1 x Red (Power)
- DIP switch: 2
- Power Supply: 5V DC
- Dimensions: 120mm/4.7"x 88mm/3.5"x 25mm/1" (Lx Wx H)
- Weight: 300g/10.6oz


## Panel Descriptions

### Front View

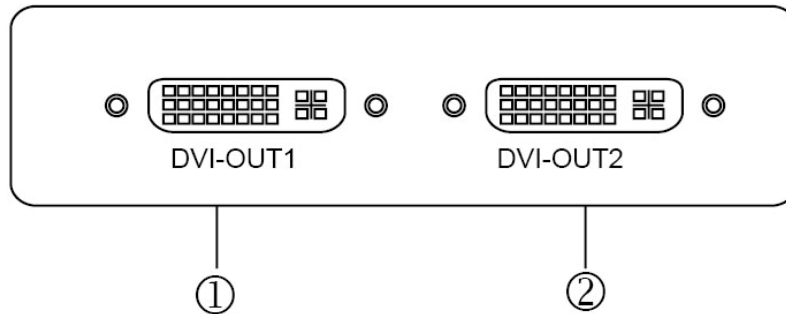

1. Connect first DVI display here.
2. Connect second DVI display here.

### Rear Panel

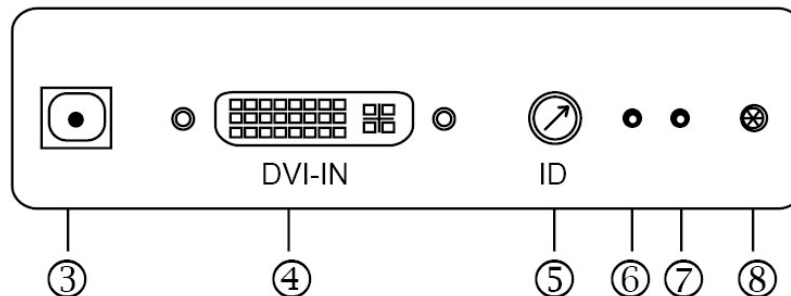

3. 5V DC
4. Connect a device equipped with DVI output (such as a PC) here.
5. Rotary switch- Assign an ID (0-7) for the device while cascading. For example, you can set rotary switch at 1 for the first EX-G048B and 2 for the second EX-G048B. Please ignore the rotary switch when only single EX-G048B exists.
6. Green LED- lights when the EX-G048B is selected.
7. Red LED- lights when power on.
8. Infrared Receiver

## Button View




Mode		
1	On	Open EQ. Less noise but more power consumption.
	Off	Close EQ.
2	On	Writing default EDID. <i>*Set the DIP switch at on and plug in power cord. The green LED will light after the writing process is completed.</i>
	Off	Record EDID of the connected display via DVI-OUT1 <i>*Plug in DVI cable first from the display and then plug in power cord. The recording process will be initiated and the green LED lights. The green LED will turn of after the reading process is completed.</i>

Warning!! Don't plug in DVI source while the EX-G048B is writing default EDID or recording EDID from displays. This will cause damage to the EDID in the flesh memory.

If you cannot boot your computer from the connected EX-G048B due to the damaged EDID in the EX-G048B, please proceed the "Writing default EDID" and then "Recording EDID of the connected display". This will enforce the EX-G048B to write the EDID from display.

## Hardware Installation

- We suggest you connect the monitor with the **lowest resolution** support to the DVI-OUT 1. (E.g. Suppose monitor A might support a maximum resolution of 1920 x 1200, monitor B supports a maximum resolution of 1280 x 1024 and monitor C supports a maximum resolution of 1024 x 768, please connect monitor C to DVI-OUT 1).
  - Unless you would like to use the default universal EDID, please set DIP switch 2 at off position, which allows the EX-G048B to read the first connected monitor's EDID.
1. Connect a monitor, a projector or other displays with DVI inputs by a male-to-male DVI cable to DVI-OUT 1.
  2. Plug DVI Y-cable into EX-G048B
  3. Connect the second display to the DVI-OUT 2.
  4. Plug 5V DC power adapter into power jack.
  5. Connect a PC or other devices with DVI outputs to EX-G048B DVI-IN.

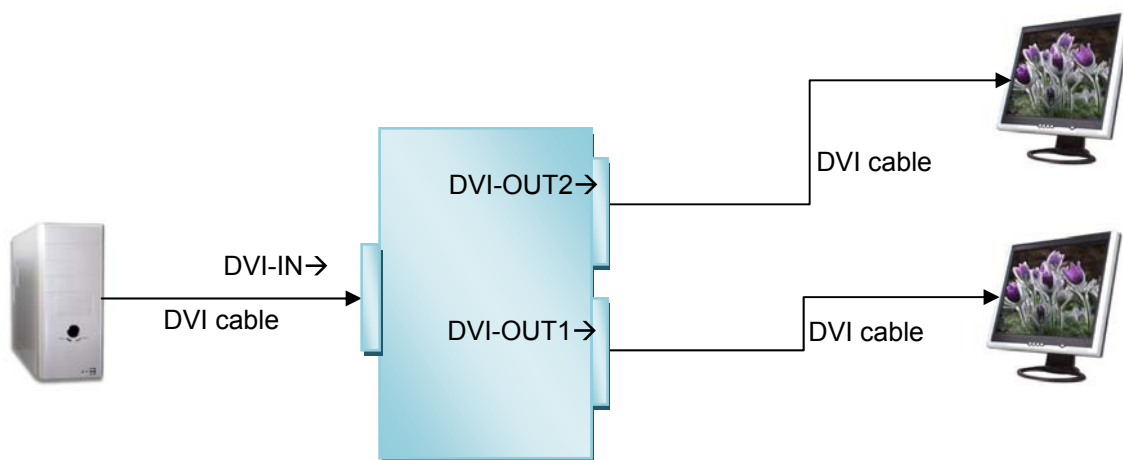

## Limited Warranty

The SELLER warrants the **EX-G048B 2-port DVI Splitter** to be free from defects in the material and workmanship for 1 year from the date of purchase from the SELLER or an authorized dealer. Should this product fail to be in good working order within 1 year warranty period, The SELLER, at its option, repair or replace the unit, provided that the unit has not been subjected to accident, disaster, abuse or any unauthorized modifications including static discharge and power surges.

Unit that fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for 90 days from the day of reshipment to the BUYER. If the unit is delivered by mail, customers agree to insure the unit or assume the risk of loss or damage in transit. Under no circumstances will a unit be accepted without a return authorization number.

The warranty is in lieu of all other warranties expressed or implied, including without limitations, any other implied warranty or fitness or merchantability for any particular purpose, all of which are expressly disclaimed.

Proof of sale may be required in order to claim warranty. Customers outside Taiwan are responsible for shipping charges to and from the SELLER. Cables are limited to a 30 day warranty and cable must be free from any markings, scratches, and neatly coiled.

The content of this manual has been carefully checked and is believed to be accurate. However, The SELLER assumes no responsibility for any inaccuracies that may be contained in this manual. The SELLER will NOT be liable for direct, indirect, incidental, special, or consequential damages resulting from any defect or omission in this manual, even if advised of the possibility of such damages. Also, the technical information contained herein regarding the EX-G048B features and specifications is subject to change without further notice.