


# American Standard

# ClearTap™


## SINGLE CONTROL WATER FILTERING KITCHEN FAUCET

### MODEL NUMBER:

- ❑ **4665.000 Water Filtering System - Kitchen Faucet**  
Handspray - Cap provided for less spray application.
- ❑ **4665.003 Water Filtering System - Kitchen Faucet**  
Handspray through escutcheon.

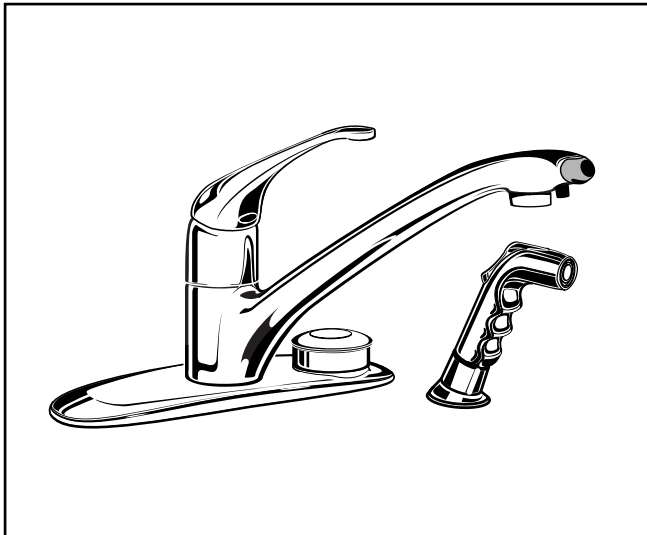

4665.000 Shown

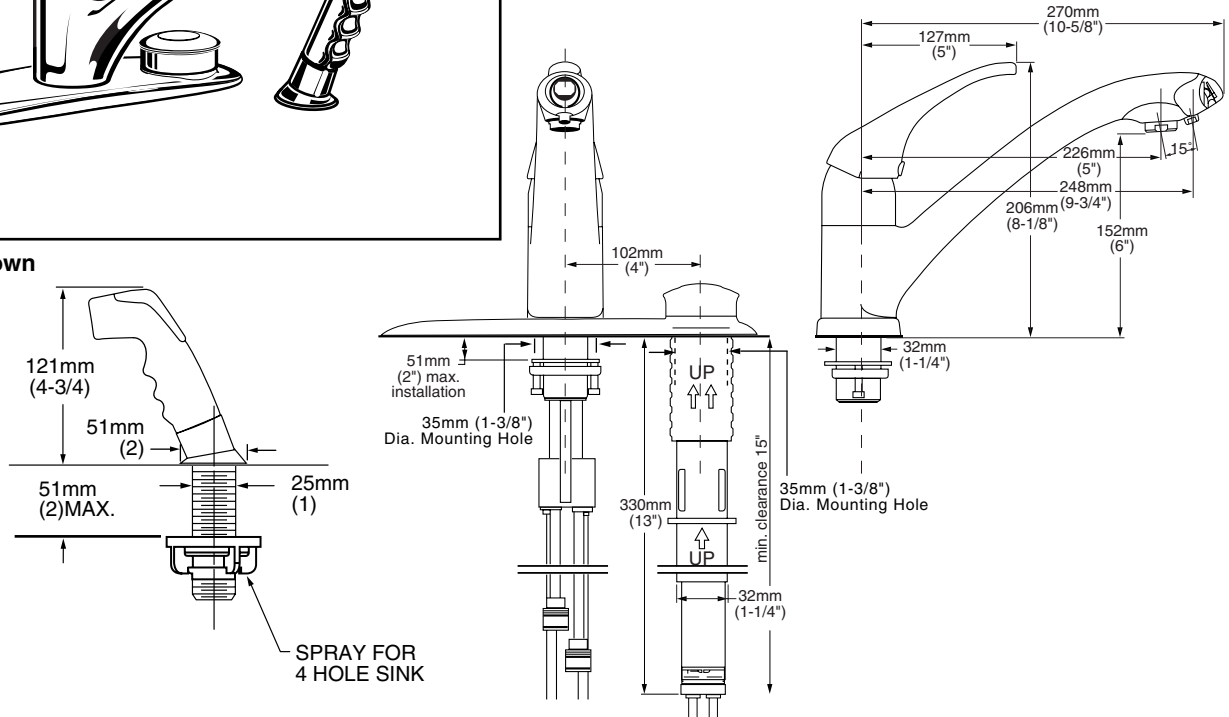

### GENERAL DESCRIPTION:

Cast brass body and swing spout, stamped brass escutcheon and metal lever handle. Washerless 47mm Ceramic Disc valve cartridge. 1/2" I.P.S. connection will accept standard bull nose connection. 2.2 GPM/8.3L/min. maximum flow rate @60 PSI from the aerator and 0.75 GPM/2.8L/min. Filtered water. Patented American Standard Carbon Matrix Technology Filter. SMARTELECTRONICS End of Life Indicator utilizes a standard CR1220 watch battery. Kitchen side spray included.

### PRODUCT FEATURES:

**Brass and Copper Waterway, Cast Brass Spout:** Highest quality faucet materials for durability and long life. Spout swings 135°.

**Integrated faucet control via patented Ceramic Disc Valve Cartridge:**

**Memory Position Valving:** Allows user to turn valve on and off at predetermined temperature setting without readjusting handle position each time. Large temperature control zone. Simple one-step filtering with a shift of the metal lever.

### PRODUCT FEATURES: (cont'd)

**Ceramic Disc Valve Cartridge:** Assures a lifetime of drip-free performance.

**Low Lead:** Meets NSF Standard 61/Section 9 & Prop 65 lead requirements.

**Filtration Characteristics:** Meets NSF 42 and NSF 53. Extra long - life Capacity - 250 gallons of usage or 90 days before filter replacement. High Flow Filter capability at .75 GPM/2.8L/min. Superior Filtration properties. Filter does not remove beneficial fluoride. Ultra-simple Filter Replacement Technique.

**Flexible Installation:** (4 Hole, 3 Hole, 2 Hole or 1 Hole options) Filter can be mounted above or below deck. Faucet installs with or without deck plate. Faucet installs with or without handspray. Below deck Filter Housing Bracket provided.

**End of Life Indicator:** Simple operation and communication with the user. Easy replacement of the common watch battery. Change filter and change battery alerts are easily understood.

**Choice of Finishes:** Choice of Polished Chrome, White, Bone or Satin.

### SUGGESTED SPECIFICATION:

Single control kitchen Filter faucet shall be constructed of a cast brass body and swing spout. Stamped brass escutcheon plate and metal lever handle. Shall also feature a washerless ceramic disc valve cartridge that regulates temperature, volume and diverts the flow of water from the aerator to the Filtered water discharge. Filter life shall be digitally displayed in terms of "Days of Life Remaining". Fitting shall be American Standard Model # 4665.\_\_\_\_.\_\_\_\_.



**SINGLE CONTROL WATER FILTERING  
KITCHEN FAUCET**

**CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

**ASME A112.18.1**

**A117.1**

**CSA B125**

**Federal Safe Drinking Water Act**

**NSF 61 Section 9**

**NSF 42**

**Chlorine Reduction Class I 98.9%**

**Improves Taste**

**Reduces Particulate Class I**


**Eliminates Odor**

**NSF 53**

**Reduces Turbidity**

**Reduces Lead 99.3%**

**Reduces Live Cysts 99.99% by Filtration**

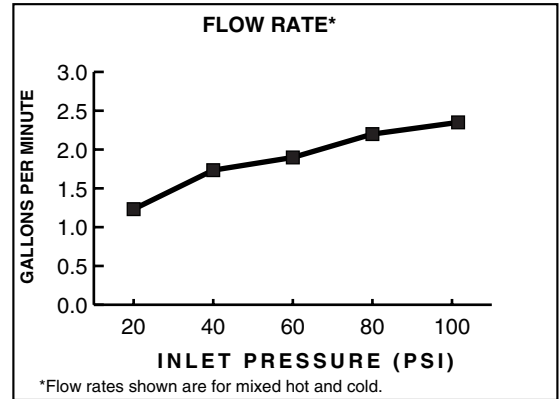

Product Number	Description	Finish Options			
		Polished Chrome	Bone	White Heat	Satin (PVD)
		002	021	208	295
4665.000	Water filtering System - Kitchen Faucet. Handspray - Cap provided for less spray application.				
4665.003	Water filtering System - Kitchen Faucet. Handspray through escutcheon.				

Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.