




MODEL NUMBER:

- 6310B Kitchen Faucet with Pull-out Spray**
 Escutcheon plate (use is optional). Bone finish.

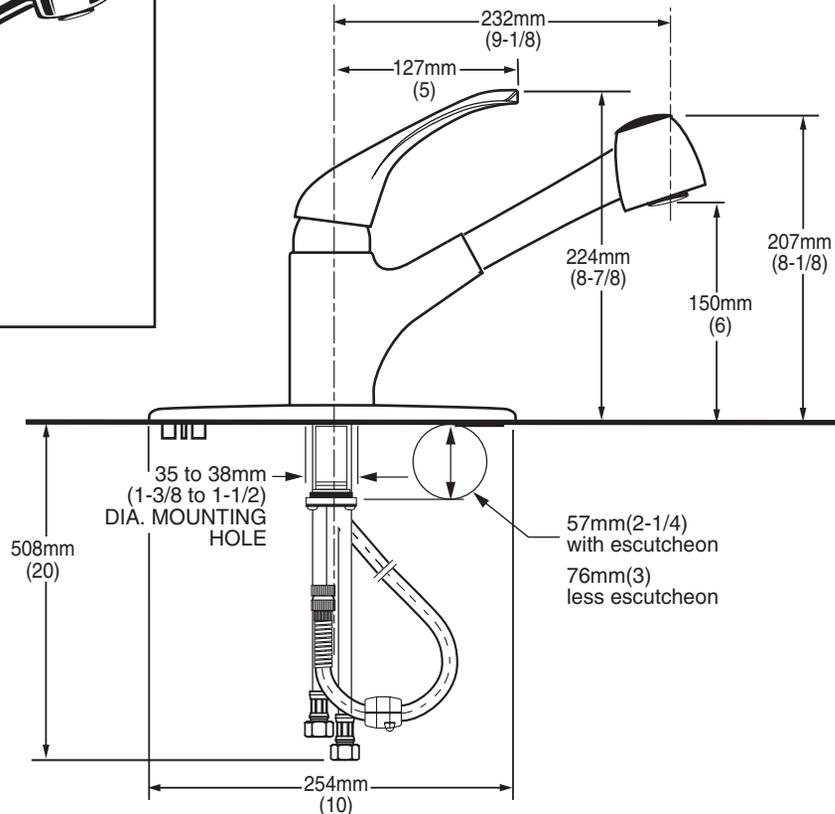

GENERAL DESCRIPTION:

Metal body, handle, and escutcheon plate. Swivel pull-out spray spout. Adjustable spray pattern with push button activation. Washerless 47mm ceramic disc valve cartridge with integral hot limit safety stop. Braided flexible supply hoses with 3/8" compression connections. Brass mounting shank with brass fixation ring. Complete with two integral check valves. 2.2 gpm/8.3L/min. maximum flow rate. Fitting can be mounted with or without escutcheon plate (escutcheon size 10"L x 2-3/4"W).

PRODUCT FEATURES:

- Upsize Button:** Switches water flow from stream to spray with just a touch.
- Durable WhisperGlide Hose:** For smooth, quiet operation.
- Easy to Install:** Flexible supply hoses are factory-installed for fast hook-up.
- Ideal for Granite and Other Solid Surfaces:** Mounts without deck plate for single hole installation
- Ceramic Disc Valve Cartridge:** Provides a lifetime of smooth handle operation and drip-free performance
- Adjustable Hot Limit Safety Stop:** Limits the amount of hot water allowed to mix with cold to reduce the risk of accidental scalding
- Lifetime Warranty:** On function & finish


SUGGESTED SPECIFICATION:

Single control kitchen pull-out faucet shall feature a swivel pull-out spray spout with two check valves, WhisperGlide™ hose, metal escutcheon plate and handle. Shall also feature washerless ceramic disc valve cartridge with integral hot limit safety stop and flexible supply hoses. Faucet shall be American Standard Model # 6310B.

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ANSI A117.1**
- ASME A112.18.1**
- NSF 61/Section 9**
- CSA B125**

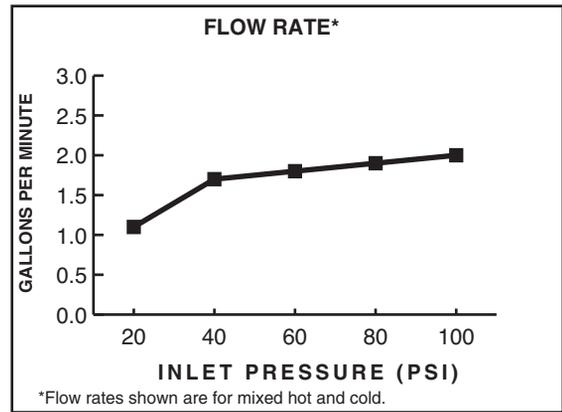

Product Number	Description
6310B	Pull-out kitchen faucet. Bone finish.



Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.