

MONTERREY™

TWO-HANDLE 8" WIDESPREAD LAVATORY FAUCET

WITH GOOSENECK SPOUT



6531.170 Shown

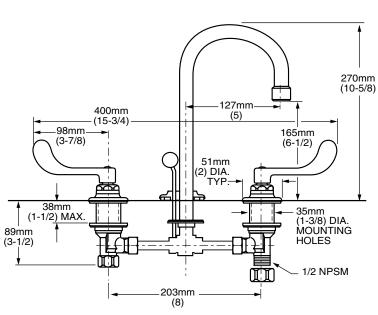

MODEL NUMBER:*

6530.170 Widespread Lavatory

1.5 gpm Pressure Compensating Aerator. Rigid gooseneck spout. Vandal-Resistant Wrist Blade Handles. Less drain and pop-up hole.

☐ 6531.170 Widespread Lavatory

1.5 gpm Pressure Compensating Aerator, Rigid gooseneck spout. Vandal-Resistant Wrist Blade Handles. Pop-up drain.

☐ 6532.170 Widespread Lavatory

1.5 gpm Pressure Compensating Aerator. Rigid gooseneck spout. Vandal-Resistant Wrist Blade Handles. Grid strainer drain.

6530.140 Widespread Lavatory


1.5 gpm Pressure Compensating Aerator. Rigid gooseneck spout. Vandal-Resistant Lever Handles. Less drain and pop-up hole.

☐ 6531.140 Widespread Lavatory

1.5 gpm Pressure Compensating Aerator. Rigid gooseneck spout. Vandal-Resistant Lever Handles. Pop-up drain.

☐ 6532.140 Widespread Lavatory

1.5 apm Pressure Compensating Aerator, Rigid gooseneck spout. Vandal-Resistant Lever Handles. Grid strainer drain.



GENERAL DESCRIPTION:

Durable cast brass construction. Cast brass valve bodies with 8" rigid copper connection with compression fittings. 1/2" male threaded inlet shanks with brass coupling nuts. 1/4 turn ceramic disc valve cartridges. Choice of Vandal-Resistant Lever or Wrist Blade handles with blue & red color indexes. All brass drain bodies with 1 1/4" (32mm) tailpieces (on applicable models). 1.5 gpm/5.7L/min. maximum flow rate. Vandal-Resistant and Laminar Flow aerators are available.

PRODUCT FEATURES:

Pressure Compensating Aerator: Provides a constant water flow of 1.5 gpm throughout the pressure range.

Solid Brass Construction: Durable - Excellent in high use applications. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridges: Assures a lifetime of drip-free performance.

Low Lead: Meets NSF Standard 61/Section 9 & Prop 65 lead requirements.

SUGGESTED SPECIFICATION:

Two handle widespread lavatory faucet shall feature cast brass valve bodies with 8" rigid copper connection. Shall feature water-conserving 1.5 gpm/5.7L/min. pressure compensating aerator. Vandal-Resistant handles. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model # 653_.

MONTERREY™


TWO-HANDLE 8" WIDESPREAD LAVATORY FAUCET

WITH GOOSENECK SPOUT

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1 CSA B 125 NSF 61/Section 9



		Finish
Product		Polished Chrome
Number	Description	002
6530.170	Widespread Lavatory with rigid gooseneck spout. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Wrist Blade Handles. Less drain and pop-up hole.	
6531.170	Widespread Lavatory with rigid gooseneck spout. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Wrist Blade Handles. Pop-up drain.	
6532.170	Widespread Lavatory with rigid gooseneck spout. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Wrist Blade Handles. Grid strainer drain.	
6530.140	Widespread Lavatory with rigid gooseneck spout. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Lever Handles. Less drain and pop-up hole.	
6531.140	Widespread Lavatory with rigid gooseneck spout. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Lever Handles. Pop-up drain.	
6532.140	Widespread Lavatory with rigid gooseneck spout. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Lever Handles. Grid strainer drain.	

Note: For Vandal Resistant models add "VP" following the product number.

Example - 6530.170VP.002 = Widespread Lavatory. Vandal-Resistant Wrist Blade Handles. Less drain and pop-up hole, in Polished Chrome finish.

Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

Other Aerators Available:		
Part Suffix	Description	
V15	1.5 gpm Pressure Compensating Vandal-Resistant Aerator	
L15	1.5 gpm Pressure Compensating Laminar Flow Outlet	
LV15	1.5 gpm Pressure Compensating Vandal-Resistant Laminar Flow Outlet	
V05	0.5 gpm Pressure Compensating Vandal-Resistant Spray	