

PRISON LAVATORY

- Vitreous china
- Integral spout and drinking nozzle
- Soap depression
- Outlet connection to slip 1-1/4" O.D. tubing

- 0421.018** China only with integral drain
- 0431.066** China only w/non-removable stopper

Available Components:

- 002250.090** Self-closing hot and cold fitting for 0" to 4" (0 to 102mm) wall
- 002250.108** Self-closing hot and cold fitting for 4" to 9" (102 to 229mm) wall
- 002423.010** Drain with non-removable stopper

Nominal Dimensions:

356 x 324mm
(14" x 12-3/4")

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2 for Vitreous China Fixtures



SEE REVERSE FOR ROUGHING-IN DIMENSIONS





To Be Specified:

- 1-1/4" Trap:

Available in White Only

0431.066/0421.018
0" to 4" WALL THICKNESS

0431.066/0421.018
4" to 9" WALL THICKNESS

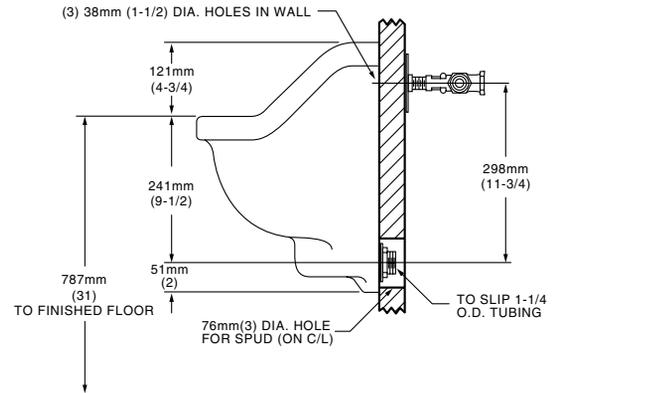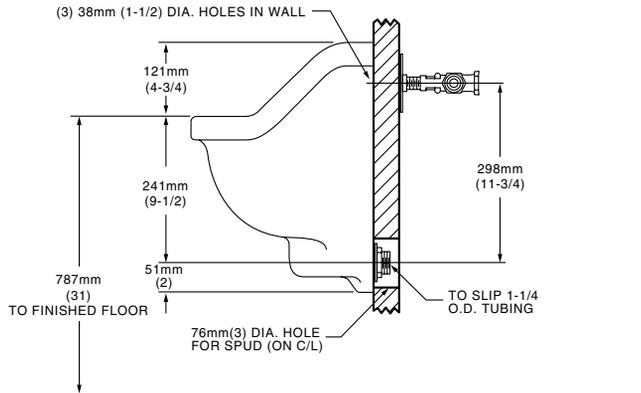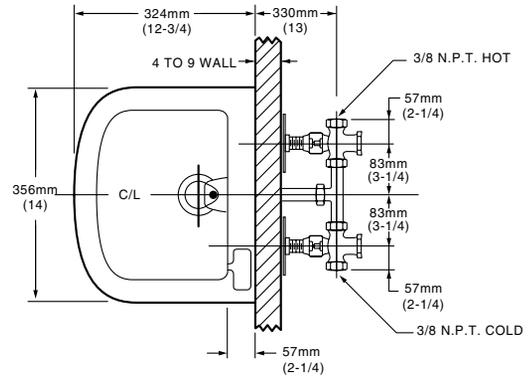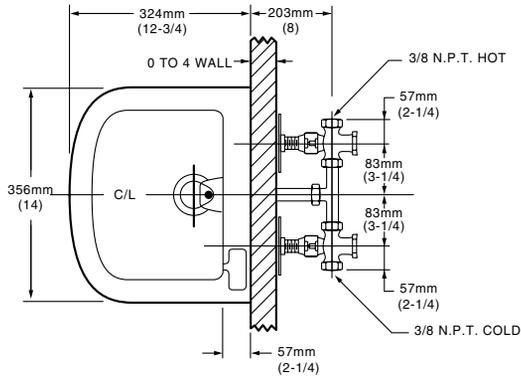

NOTES:
THESE LAVATORIES DO NOT HAVE A TRAP. PROVISIONS MUST BE MADE FOR INSTALLATION OF TRAP IN WALL.
0431.SERIES SHOWN. 0421.SERIES SAME EXCEPT WITH INTEGRAL SLOW-DRAINING OUTLET.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages